



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®\_rate2006 = 193

Servidor Itautec MX223 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 181

CPU2006 license: 9001


Test date: Aug-2010

Test sponsor: Itautec

Hardware Availability: Apr-2010

Tested by: Itautec

Software Availability: Apr-2010

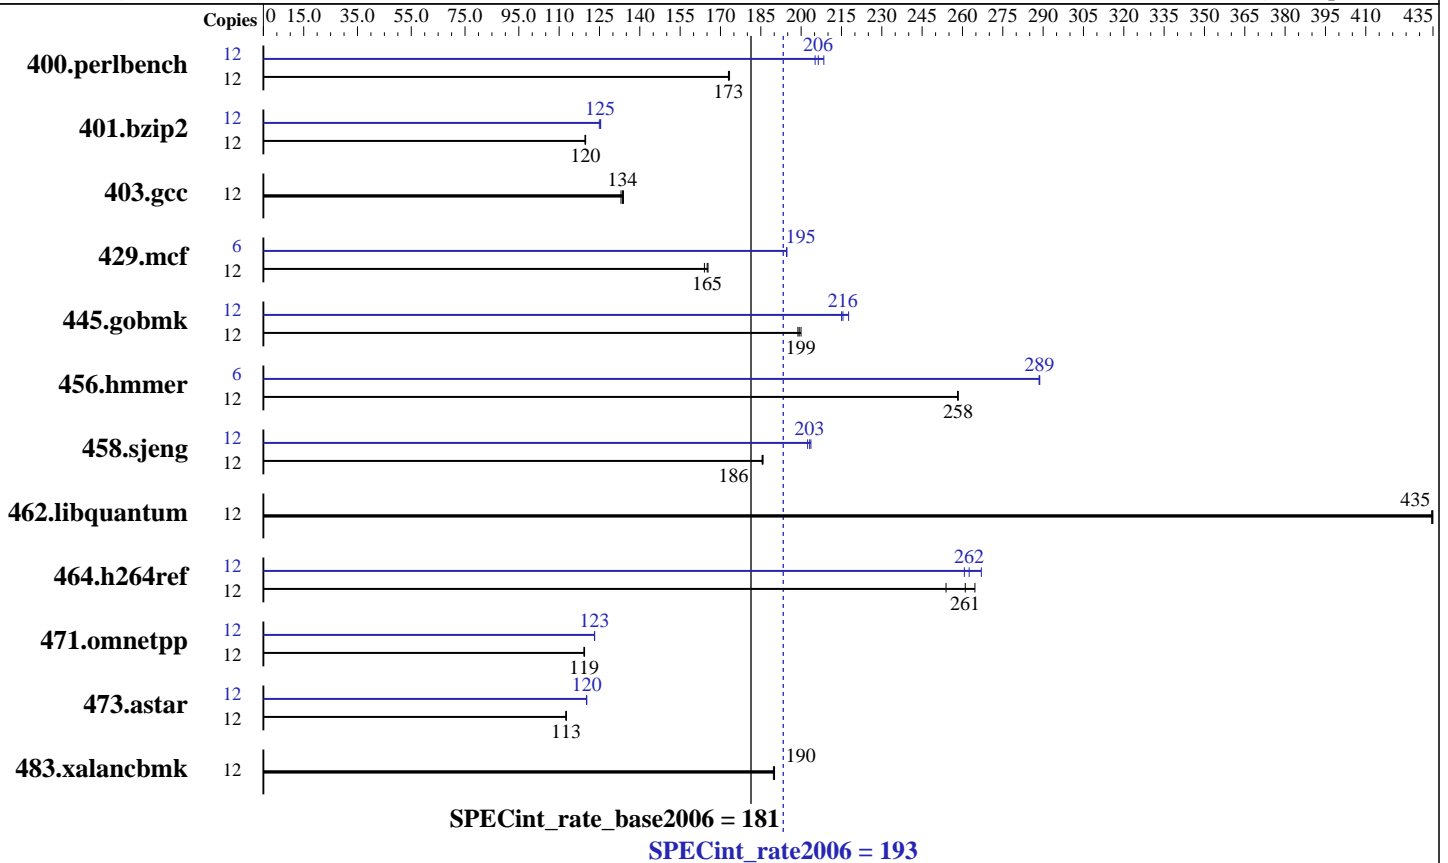

## Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)  
 Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l\_cproc\_p\_11.1.072  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 181

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	678	173	676	173	<b>678</b>	<b>173</b>	12	562	208	<b>568</b>	<b>206</b>	571	205
401.bzip2	12	<b>967</b>	<b>120</b>	966	120	968	120	12	927	125	923	125	<b>924</b>	<b>125</b>
403.gcc	12	<b>723</b>	<b>134</b>	721	134	726	133	12	<b>723</b>	<b>134</b>	721	134	726	133
429.mcf	12	662	165	667	164	<b>663</b>	<b>165</b>	6	281	195	281	195	<b>281</b>	<b>195</b>
445.gobmk	12	630	200	<b>632</b>	<b>199</b>	633	199	12	578	218	585	215	<b>584</b>	<b>216</b>
456.hammer	12	<b>433</b>	<b>258</b>	434	258	433	258	6	194	288	194	289	<b>194</b>	<b>289</b>
458.sjeng	12	783	185	781	186	<b>782</b>	<b>186</b>	12	713	204	717	202	<b>715</b>	<b>203</b>
462.libquantum	12	<b>572</b>	<b>435</b>	572	435	572	435	12	<b>572</b>	<b>435</b>	572	435	572	435
464.h264ref	12	<b>1017</b>	<b>261</b>	1003	265	1046	254	12	995	267	1019	261	<b>1012</b>	<b>262</b>
471.omnetpp	12	628	119	<b>629</b>	<b>119</b>	629	119	12	609	123	<b>609</b>	<b>123</b>	609	123
473.astar	12	<b>748</b>	<b>113</b>	747	113	749	112	12	701	120	<b>701</b>	<b>120</b>	701	120
483.xalancbmk	12	<b>436</b>	<b>190</b>	437	190	436	190	12	<b>436</b>	<b>190</b>	437	190	436	190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

## General Notes

This result was measured on the Servidor Itaotec MX223.  
The Servidor Itaotec MX203 and the Servidor Itaotec MX223 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 193

Servidor Itautec MX223 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 181

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Aug-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/richard/sh/SmartHeap\_8.1/lib -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 181

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2010  
Hardware Availability: Apr-2010  
Software Availability: Apr-2010

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/richard/sh/SmartHeap\_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/richard/sh/SmartHeap\_8/lib -lsmarheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5680)

SPECint\_rate\_base2006 = 181

CPU2006 license: 9001

Test sponsor: Itaotec

Tested by: Itaotec

Test date: Aug-2010

Hardware Availability: Apr-2010

Software Availability: Apr-2010

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 10:18:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 September 2010.