



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp\_rate\_base2006 = 117

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

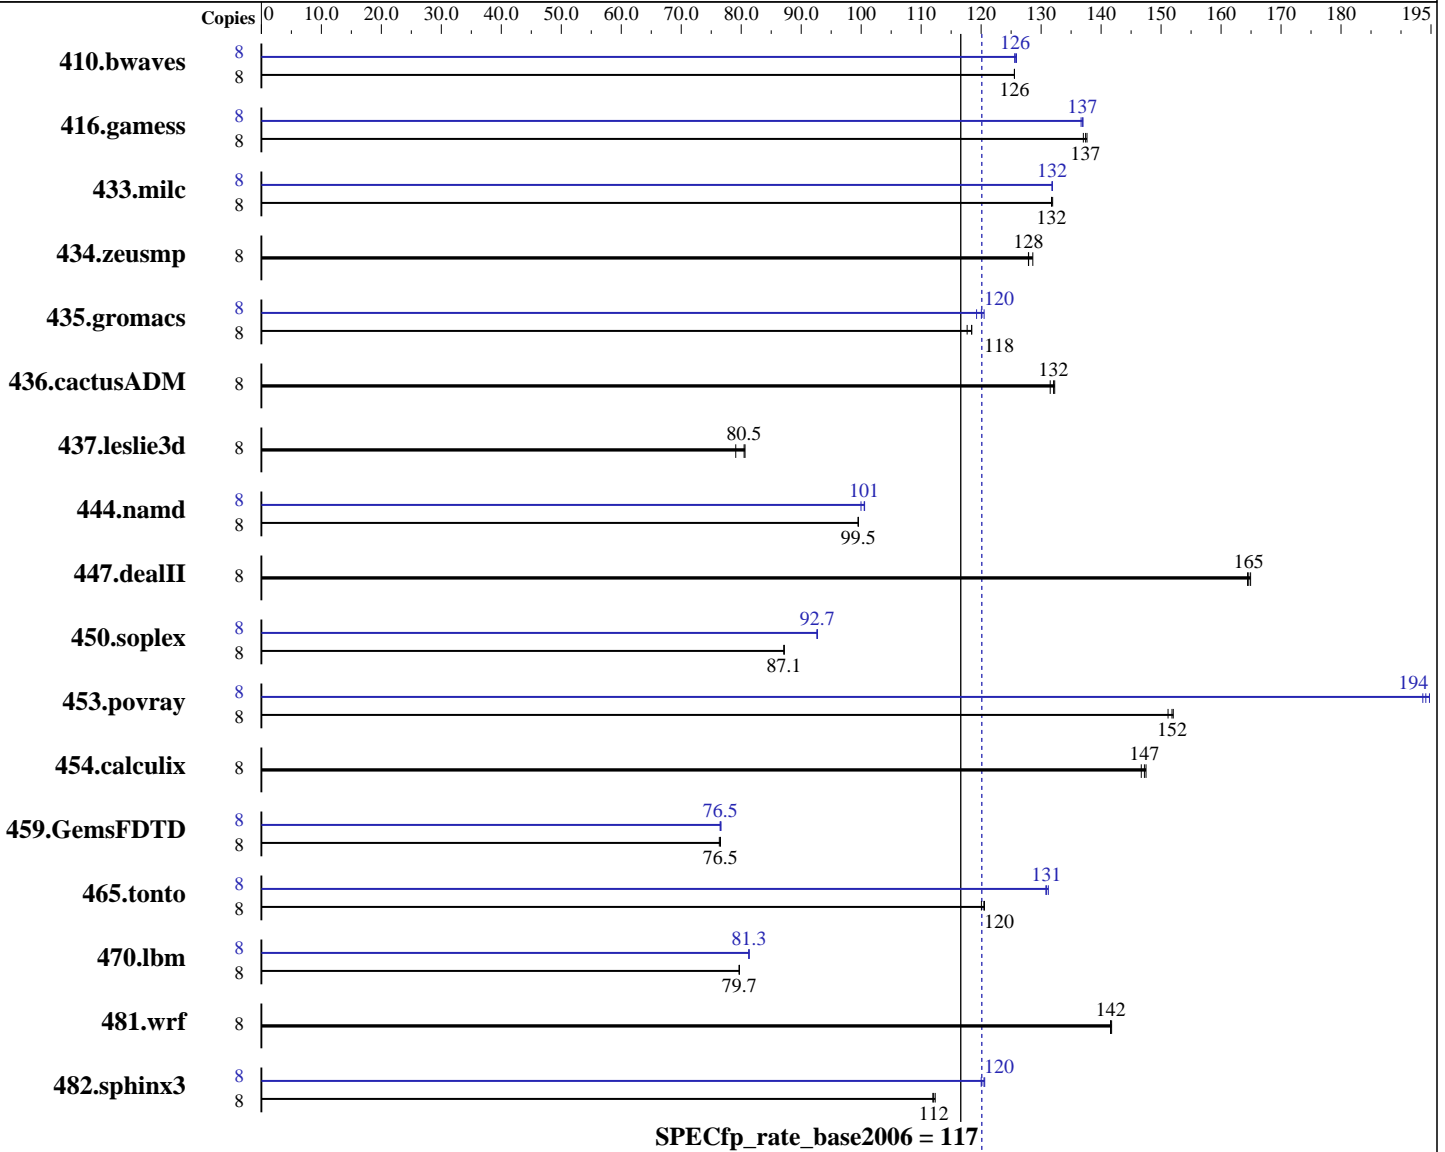

### Hardware

CPU Name: Intel Xeon E5506  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **120**

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp\_rate\_base2006 = **117**

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	866	126	866	126	<b>866</b>	<b>126</b>	8	866	126	864	126	<b>865</b>	<b>126</b>
416.gamess	8	1138	138	<b>1140</b>	<b>137</b>	1143	137	8	1146	137	<b>1144</b>	<b>137</b>	1143	137
433.milc	8	<b>557</b>	<b>132</b>	557	132	557	132	8	<b>557</b>	<b>132</b>	557	132	557	132
434.zeusmp	8	566	129	569	128	<b>569</b>	<b>128</b>	8	566	129	569	128	<b>569</b>	<b>128</b>
435.gromacs	8	<b>482</b>	<b>118</b>	482	118	485	118	8	474	120	479	119	<b>476</b>	<b>120</b>
436.cactusADM	8	723	132	<b>724</b>	<b>132</b>	727	132	8	723	132	<b>724</b>	<b>132</b>	727	132
437.leslie3d	8	<b>934</b>	<b>80.5</b>	951	79.1	933	80.6	8	<b>934</b>	<b>80.5</b>	951	79.1	933	80.6
444.namd	8	645	99.5	645	99.5	<b>645</b>	<b>99.5</b>	8	642	100	638	101	<b>638</b>	<b>101</b>
447.dealII	8	<b>556</b>	<b>165</b>	557	164	555	165	8	<b>556</b>	<b>165</b>	557	164	555	165
450.soplex	8	765	87.2	766	87.1	<b>766</b>	<b>87.1</b>	8	720	92.7	<b>720</b>	<b>92.7</b>	720	92.6
453.povray	8	282	151	280	152	<b>280</b>	<b>152</b>	8	219	195	<b>219</b>	<b>194</b>	220	194
454.calculix	8	447	147	<b>448</b>	<b>147</b>	450	147	8	447	147	<b>448</b>	<b>147</b>	450	147
459.GemsFDTD	8	1112	76.4	<b>1109</b>	<b>76.5</b>	1109	76.5	8	<b>1109</b>	<b>76.5</b>	1110	76.5	1108	76.6
465.tonto	8	<b>654</b>	<b>120</b>	653	121	656	120	8	<b>601</b>	<b>131</b>	600	131	602	131
470.lbm	8	<b>1380</b>	<b>79.7</b>	1379	79.7	1380	79.7	8	1352	81.3	1353	81.3	<b>1352</b>	<b>81.3</b>
481.wrf	8	630	142	631	142	<b>631</b>	<b>142</b>	8	630	142	631	142	<b>631</b>	<b>142</b>
482.sphinx3	8	1388	112	1393	112	<b>1391</b>	<b>112</b>	8	1293	121	1299	120	<b>1294</b>	<b>120</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 800 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2010  
**Hardware Availability:** Jul-2010  
**Software Availability:** Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2010  
**Hardware Availability:** Jul-2010  
**Software Availability:** Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
  
482.sphinx3: icc -m32  
  
C++ benchmarks (except as noted below):  
icpc -m64  
  
450.soplex: icpc -m32  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp\_rate\_base2006 = 117

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY TX200 S6, Intel Xeon E5506, 2.13 GHz

**SPECfp\_rate\_base2006 = 117**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Sep-2010

**Hardware Availability:** Jul-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:32:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 October 2010.