



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp®2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

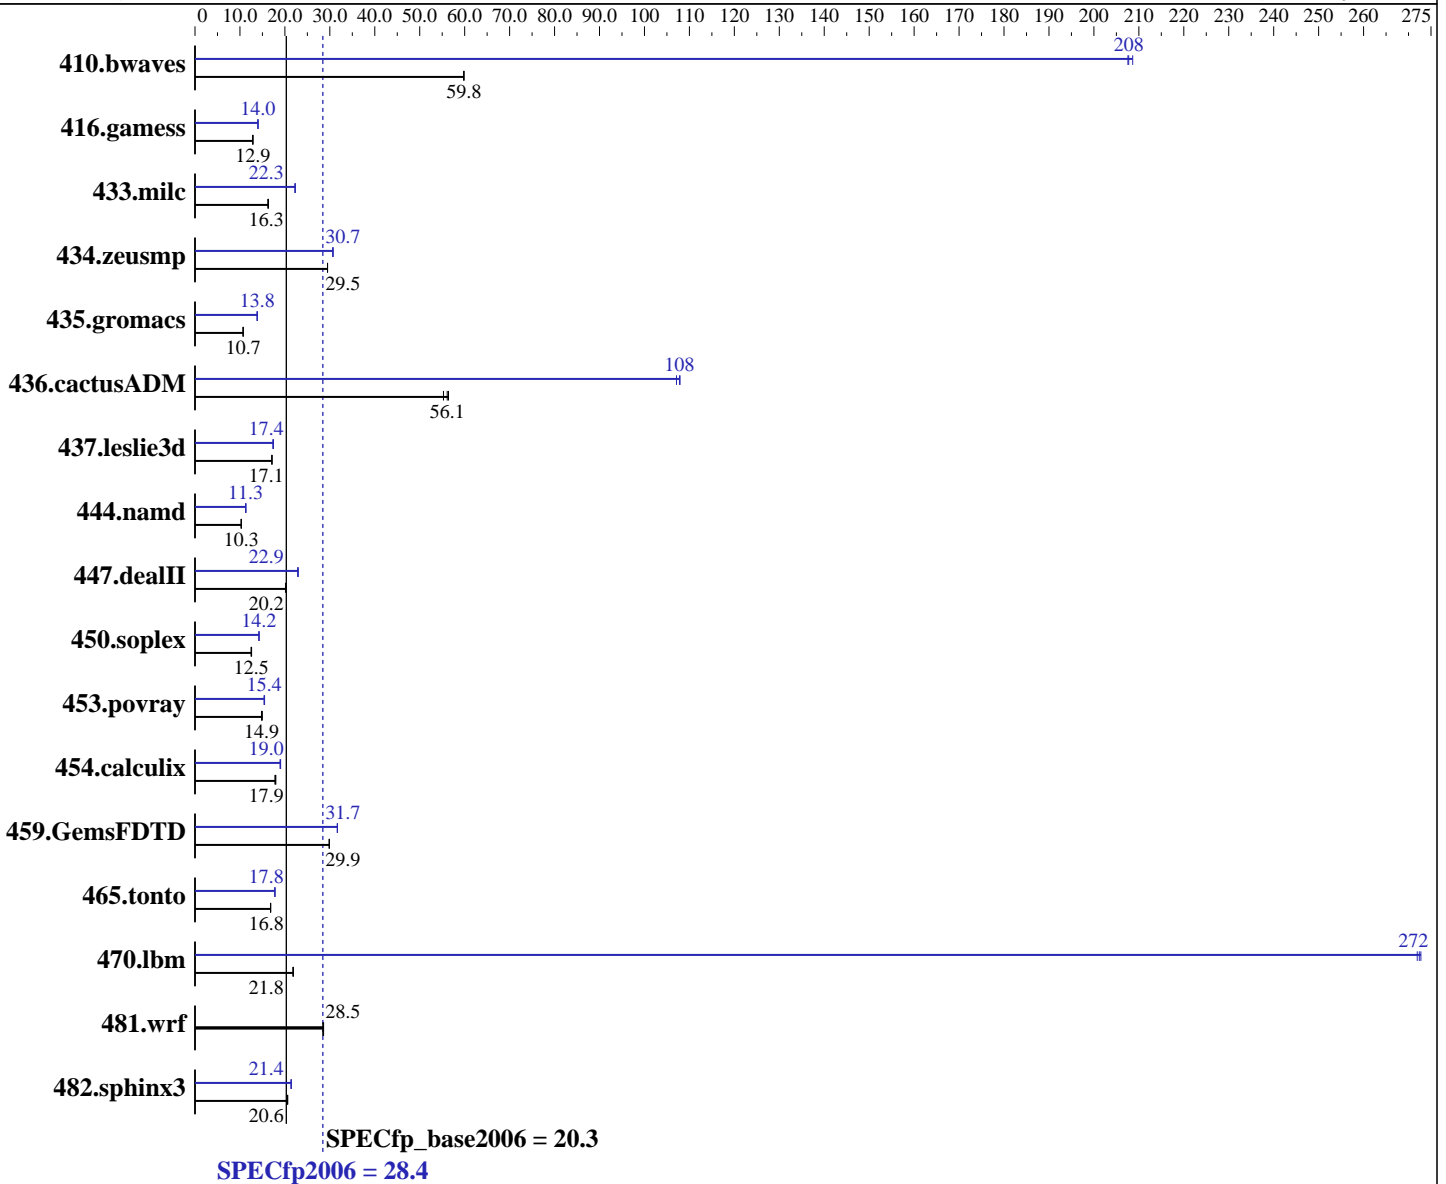

### Hardware

CPU Name: AMD Opteron 6128 HE  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.4,  
 Advanced Platform with patch RHSA-2009:1670,  
 Kernel 2.6.18-164.9.1.el5  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: binutils 2.18

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	227	59.8	<u>227</u>	<u>59.8</u>	227	59.8	65.5	208	65.1	209	<u>65.4</u>	<u>208</u>
416.gamess	<u>1520</u>	<u>12.9</u>	1527	12.8	1518	12.9	1395	14.0	1399	14.0	<u>1398</u>	<u>14.0</u>
433.milc	566	16.2	562	16.3	<u>564</u>	<u>16.3</u>	<u>412</u>	<u>22.3</u>	412	22.3	411	22.3
434.zeusmp	<u>309</u>	<u>29.5</u>	309	29.5	309	29.5	<u>297</u>	<u>30.7</u>	296	30.7	297	30.7
435.gromacs	667	10.7	<u>666</u>	<u>10.7</u>	666	10.7	516	13.8	<u>516</u>	<u>13.8</u>	516	13.8
436.cactusADM	212	56.4	<u>213</u>	<u>56.1</u>	216	55.3	<u>111</u>	<u>108</u>	111	108	112	107
437.leslie3d	550	17.1	<u>549</u>	<u>17.1</u>	548	17.1	543	17.3	<u>539</u>	<u>17.4</u>	539	17.5
444.namd	779	10.3	781	10.3	<u>779</u>	<u>10.3</u>	<u>709</u>	<u>11.3</u>	711	11.3	709	11.3
447.dealII	568	20.1	567	20.2	<u>567</u>	<u>20.2</u>	500	22.9	<u>500</u>	<u>22.9</u>	498	23.0
450.soplex	<u>665</u>	<u>12.5</u>	668	12.5	662	12.6	585	14.2	<u>585</u>	<u>14.2</u>	586	14.2
453.povray	355	15.0	<u>358</u>	<u>14.9</u>	360	14.8	346	15.4	344	15.5	<u>345</u>	<u>15.4</u>
454.calculix	<u>460</u>	<u>17.9</u>	464	17.8	459	18.0	433	19.1	436	18.9	<u>434</u>	<u>19.0</u>
459.GemsFDTD	<u>355</u>	<u>29.9</u>	355	29.9	355	29.9	<u>335</u>	<u>31.7</u>	335	31.7	335	31.7
465.tonto	584	16.9	<u>585</u>	<u>16.8</u>	585	16.8	<u>554</u>	<u>17.8</u>	554	17.8	553	17.8
470.lbm	630	21.8	627	21.9	<u>630</u>	<u>21.8</u>	50.5	272	50.4	273	<u>50.4</u>	<u>272</u>
481.wrf	390	28.6	<u>392</u>	<u>28.5</u>	393	28.4	390	28.6	<u>392</u>	<u>28.5</u>	393	28.4
482.sphinx3	947	20.6	<u>946</u>	<u>20.6</u>	945	20.6	911	21.4	910	21.4	<u>911</u>	<u>21.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=4000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Base Optimization Flags

### C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

### C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel\_overhead=10000  
-LNO:fusion\_peeling\_limit=0 -HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo  
-LNO:parallel\_overhead=10000 -LNO:fusion\_peeling\_limit=0

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-CG:compute\_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse\_cse\_regs=0  
-LNO:prefetch\_ahead=4 -CG:locs\_shallow\_depth=1  
-CG:cmp\_peep=on -CG:compute\_to=on -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -CG:load\_exe=0 -fno-exceptions  
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc\_alg=2  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -LNO:blocking=off  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

SPECfp2006 = 28.4

SPECfp\_base2006 = 20.3

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore\_feedback=off -LNO:apo\_use\_feedback=on  
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll\_size=256

-LNO:prefetch\_ahead=4 -LNO:parallel\_overhead=32768  
-GRA:prioritize\_by\_density=on -m3dnw -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -apo  
-LANG:heap\_allocation\_threshold=1000 -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch\_ahead=30

-CG:load\_exe=0 -CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2  
-CG:compute\_to=on -WOPT:unroll=2 -GRA:optimize\_boundary=on  
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6128 HE

**SPECfp2006 = 28.4**

**SPECfp\_base2006 = 20.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:07:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 December 2010.