



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp®2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

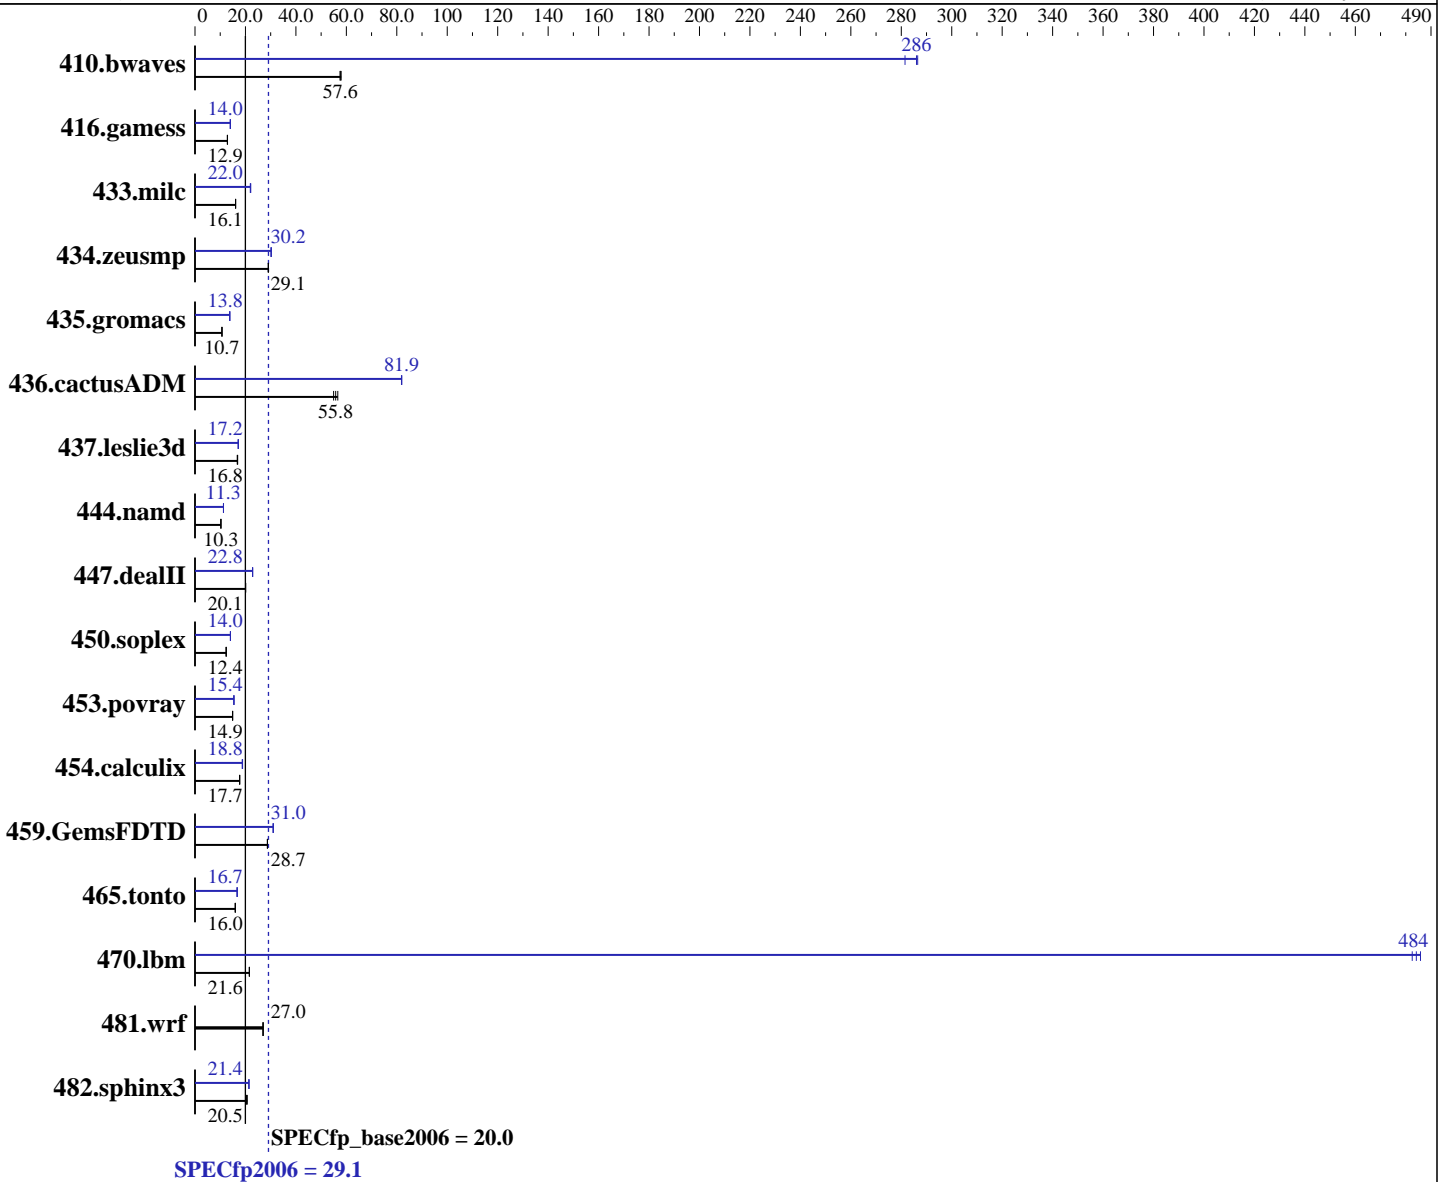

Hardware

CPU Name: AMD Opteron 6128
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	236	57.5	<u>236</u>	<u>57.6</u>	235	57.9	47.4	287	48.3	281	<u>47.5</u>	<u>286</u>
416.gamess	1519	12.9	<u>1522</u>	<u>12.9</u>	1527	12.8	1394	14.0	<u>1397</u>	<u>14.0</u>	1402	14.0
433.milc	<u>571</u>	<u>16.1</u>	569	16.1	571	16.1	418	22.0	<u>418</u>	<u>22.0</u>	415	22.1
434.zeusmp	<u>313</u>	<u>29.1</u>	313	29.0	313	29.1	302	30.1	<u>301</u>	<u>30.2</u>	301	30.2
435.gromacs	669	10.7	<u>668</u>	<u>10.7</u>	668	10.7	<u>518</u>	<u>13.8</u>	518	13.8	519	13.8
436.cactusADM	<u>214</u>	<u>55.8</u>	211	56.6	217	55.0	<u>146</u>	<u>81.9</u>	146	82.0	146	81.9
437.leslie3d	<u>559</u>	<u>16.8</u>	560	16.8	556	16.9	550	17.1	<u>547</u>	<u>17.2</u>	546	17.2
444.namd	780	10.3	<u>781</u>	<u>10.3</u>	782	10.3	711	11.3	<u>710</u>	<u>11.3</u>	709	11.3
447.dealII	<u>570</u>	<u>20.1</u>	570	20.1	571	20.0	<u>501</u>	<u>22.8</u>	501	22.8	500	22.9
450.soplex	673	12.4	675	12.4	<u>675</u>	<u>12.4</u>	593	14.1	<u>594</u>	<u>14.0</u>	594	14.0
453.povray	<u>357</u>	<u>14.9</u>	356	15.0	358	14.9	343	15.5	<u>345</u>	<u>15.4</u>	346	15.4
454.calculix	464	17.8	467	17.6	<u>466</u>	<u>17.7</u>	<u>439</u>	<u>18.8</u>	437	18.9	440	18.8
459.GemsFDTD	370	28.7	369	28.7	<u>370</u>	<u>28.7</u>	342	31.0	<u>342</u>	<u>31.0</u>	342	31.0
465.tonto	615	16.0	617	15.9	<u>615</u>	<u>16.0</u>	589	16.7	<u>589</u>	<u>16.7</u>	589	16.7
470.lbm	<u>637</u>	<u>21.6</u>	639	21.5	636	21.6	28.3	486	<u>28.4</u>	<u>484</u>	28.5	483
481.wrf	414	27.0	<u>414</u>	<u>27.0</u>	413	27.1	414	27.0	<u>414</u>	<u>27.0</u>	413	27.1
482.sphinx3	<u>949</u>	<u>20.5</u>	941	20.7	954	20.4	<u>912</u>	<u>21.4</u>	912	21.4	911	21.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=8000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
openc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
-CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
-LNO:prefetch=3 -LNO:prefetch_ahead=5

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256

-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30

-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6128

SPECfp2006 = 29.1

SPECfp_base2006 = 20.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:08:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2010.