



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®2006 = **Not Run**

ProLiant BL460c G7 (2.53 GHz, Intel Xeon E5630)

SPECint\_base2006 = **26.7**

CPU2006 license: 3


Test date: Nov-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

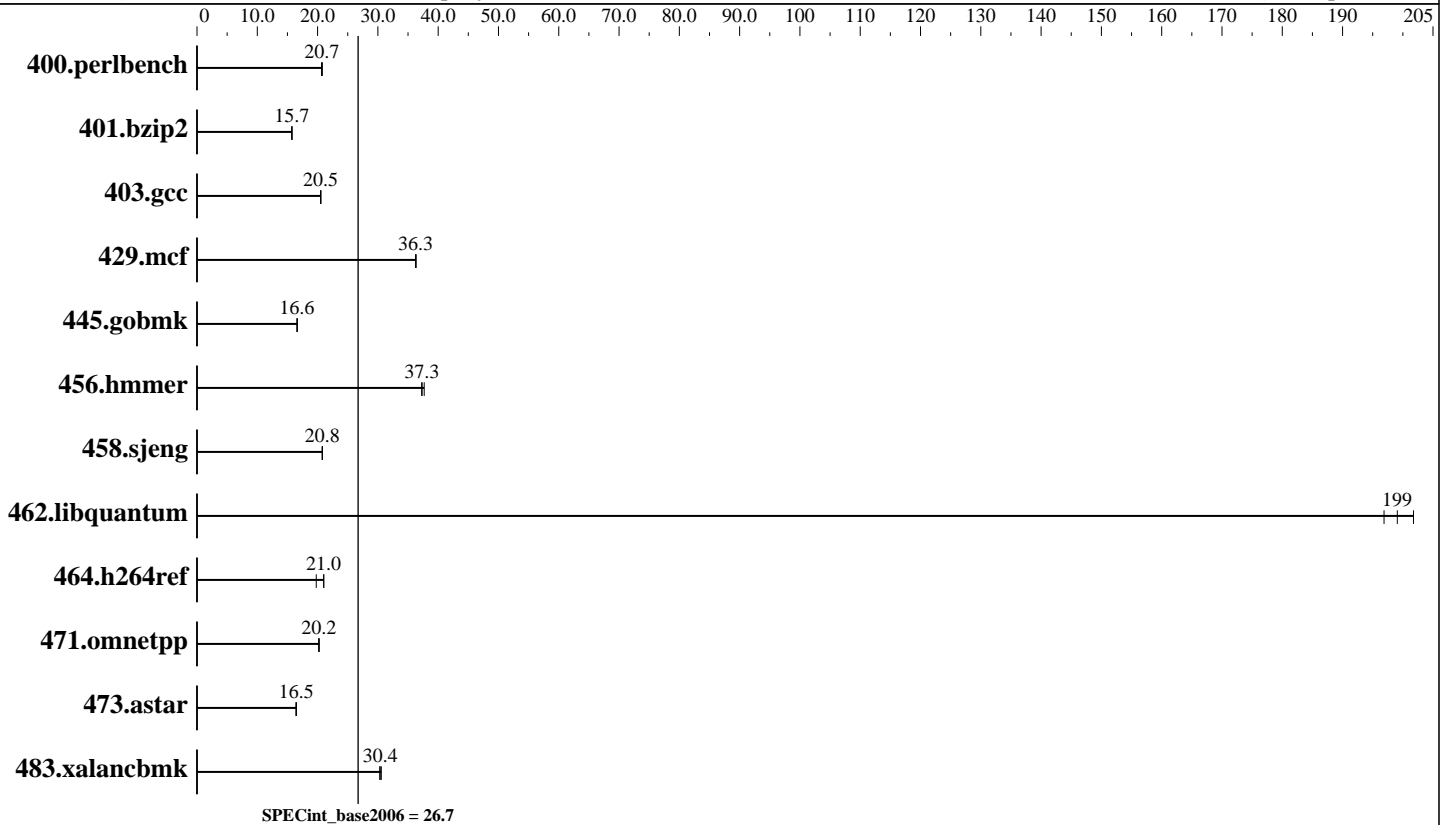

### Hardware

CPU Name: Intel Xeon E5630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB 10 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5  
 Kernel 2.6.18-194.el5  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint2006 = **Not Run**

ProLiant BL460c G7 (2.53 GHz, Intel Xeon E5630)

SPECint\_base2006 = **26.7**

CPU2006 license: 3

Test date: Nov-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	473	20.7	470	20.8	<b>471</b>	<b>20.7</b>						
401.bzip2	613	15.7	<b>613</b>	<b>15.7</b>	613	15.7						
403.gcc	<b>392</b>	<b>20.5</b>	392	20.5	392	20.5						
429.mcf	251	36.3	251	36.3	<b>251</b>	<b>36.3</b>						
445.gobmk	631	16.6	632	16.6	<b>632</b>	<b>16.6</b>						
456.hammer	250	37.3	248	37.7	<b>250</b>	<b>37.3</b>						
458.sjeng	<b>582</b>	<b>20.8</b>	583	20.8	582	20.8						
462.libquantum	103	202	105	197	<b>104</b>	<b>199</b>						
464.h264ref	<b>1053</b>	<b>21.0</b>	1053	21.0	1119	19.8						
471.omnetpp	309	20.3	310	20.2	<b>309</b>	<b>20.2</b>						
473.astar	<b>427</b>	<b>16.5</b>	427	16.4	426	16.5						
483.xalancbmk	226	30.6	228	30.3	<b>227</b>	<b>30.4</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = Not Run

ProLiant BL460c G7 (2.53 GHz, Intel Xeon E5630)

SPECint\_base2006 = 26.7

CPU2006 license: 3

Test date: Nov-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20101118.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20101221.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20101118.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20101221.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = Not Run

ProLiant BL460c G7 (2.53 GHz, Intel Xeon E5630)

SPECint\_base2006 = 26.7

CPU2006 license: 3

Test date: Nov-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2010

Tested by: Hewlett-Packard Company

Software Availability: Apr-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:42:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 December 2010.