



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation SPARC Enterprise M4000

SPECfp®2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

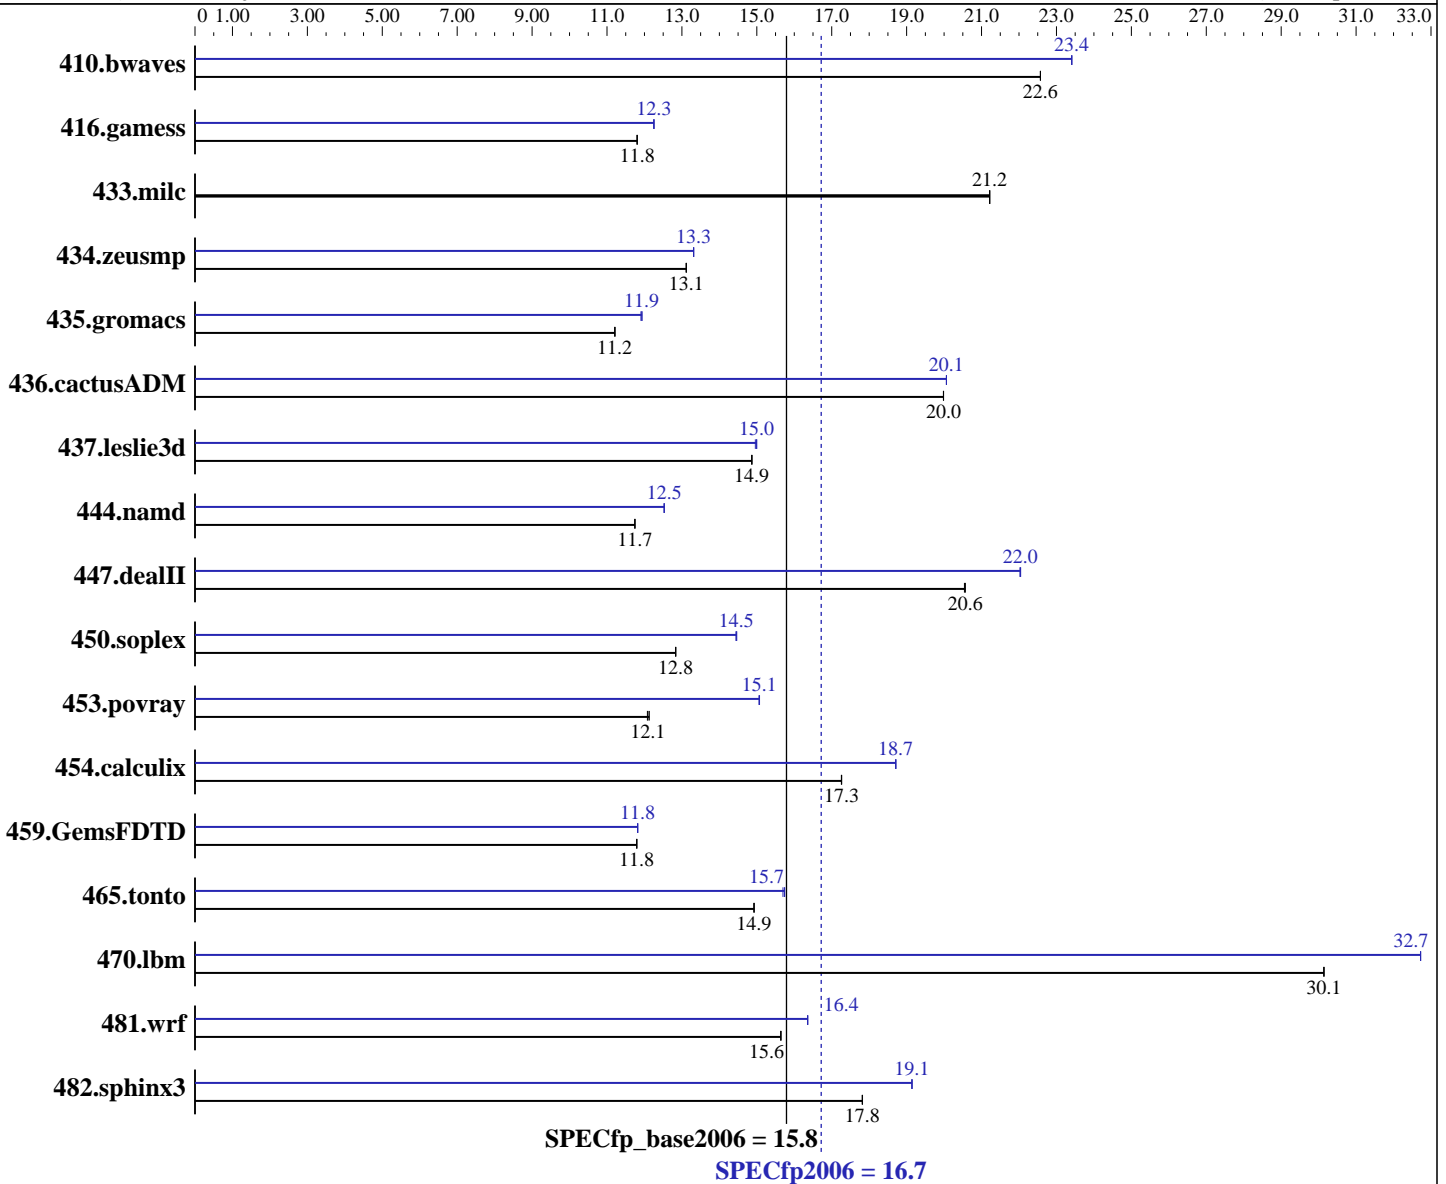

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 2 CPUMs; each CPUM contains 2 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 11 MB I+D on chip per chip

Continued on next page

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 128 GB (32 x 4 GB, 8-way interleaved)
Disk Subsystem: 1 x 300 GB 10,000 RPM SAS
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	602	22.6	602	22.6	602	22.6	581	23.4	581	23.4	581	23.4
416.gamess	1658	11.8	1659	11.8	1659	11.8	1598	12.3	1598	12.2	1597	12.3
433.milc	433	21.2	433	21.2	433	21.2	433	21.2	433	21.2	433	21.2
434.zeusmp	694	13.1	694	13.1	694	13.1	684	13.3	684	13.3	683	13.3
435.gromacs	637	11.2	637	11.2	637	11.2	598	11.9	599	11.9	600	11.9
436.cactusADM	598	20.0	598	20.0	598	20.0	596	20.1	596	20.1	596	20.1
437.leslie3d	632	14.9	632	14.9	632	14.9	627	15.0	628	15.0	627	15.0
444.namd	683	11.7	683	11.7	683	11.7	640	12.5	640	12.5	640	12.5
447.dealII	557	20.5	556	20.6	556	20.6	519	22.0	519	22.0	519	22.0
450.soplex	650	12.8	650	12.8	650	12.8	577	14.5	577	14.4	577	14.5
453.povray	440	12.1	439	12.1	440	12.1	353	15.1	353	15.1	353	15.1
454.calculix	478	17.3	478	17.3	478	17.3	441	18.7	441	18.7	441	18.7
459.GemsFDTD	900	11.8	900	11.8	900	11.8	898	11.8	898	11.8	898	11.8
465.tonto	659	14.9	659	14.9	659	14.9	625	15.7	625	15.7	627	15.7
470.lbm	456	30.1	456	30.1	456	30.1	420	32.7	420	32.7	420	32.7
481.wrf	714	15.6	714	15.6	714	15.6	683	16.4	683	16.4	683	16.4
482.sphinx3	1094	17.8	1094	17.8	1094	17.8	1018	19.1	1018	19.1	1018	19.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08
Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

```
ulimit -s 131072 was used to limit the space consumed  
by the stack.(making more space available for the heap)
```

System Tunables (/etc/system parameters):

```
tune_t_fsflushr=10  
Controls how many seconds elapse between runs of the  
page flush daemon, fsflush.  
autoup=600  
Causes pages older than the listed number of seconds to  
be written by fsflush.
```

Other System Settings:

```
The webconsole service was turned off using  
svcadm disable webconsole
```

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M4000 server from Fujitsu. The SPARC Enterprise M4000 server from Oracle and from Fujitsu are electrically equivalent.

General Notes

447.dealII (peak): "apache_stdccx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdccx_4_2_1" src.alt was used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2 -xlinkopt
-xvector -xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch=latx:2 -M /usr/lib/ld/map.bssalign -l12amm

C++ benchmarks:
-xdepend -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2
-xlinkopt -xvector -xalias_level=compatible -xprefetch_level=3
-library=no%Cstd -I/mnt/spec//stdcxx-4.2.1/include
-I/mnt/spec//stdcxx-4.2.1/build/include -M /usr/lib/ld/map.bssalign
-L/mnt/spec//stdcxx-4.2.1/build/lib -R/mnt/spec//stdcxx-4.2.1/build/lib
-lstd8d

Fortran benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2 -xlinkopt
-xvector -xprefetch=latx:2 -M /usr/lib/ld/map.bssalign -l12amm

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xlinkopt -xvector -xalias_level=std
-xprefetch_auto_type=indirect_array_access -xprefetch=latx:2
-M /usr/lib/ld/map.bssalign -l12amm

Base Other Flags

C benchmarks:
-xjobs=2 -V -#

C++ benchmarks:
-xjobs=2 -verbose=diags,version

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags (Continued)

Fortran benchmarks:
-xjobs=2 -V -v

Benchmarks using both Fortran and C:
-xjobs=2 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xarch=generic -xvector -xunroll=8
-xprefetch=latx:2

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=std -M /usr/lib/ld/map.bssalign
-xipo=2 -xprefetch_level=2 -xunroll=4 -xprefetch=latx:1.2
-ll2amm

C++ benchmarks:

444.namd: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible -library=stlport4
-xalias_level=any -xchip=generic

447.dealIII: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible -library=no%Cstd

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

447.dealIII (continued):

```
-I/mnt/spec//stdcxx-4.2.1/include
-I/mnt/spec//stdcxx-4.2.1/build/include -xipo=2
-xprefetch_auto_type=indirect_array_access -xrestrict
-xchip=generic -xunroll=4
-L/mnt/spec//stdcxx-4.2.1/build/lib
-R/mnt/spec//stdcxx-4.2.1/build/lib -lstd8d -ll2amm
```

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3
-xalias_level=simple -xrestrict -library=stlport4

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible -library=stlport4
-xO4 -xipo=2 -xprefetch=latx:4 -xvector -xlinkopt=2
-xunroll=4 -ll2amm -lfast

Fortran benchmarks:

410.bwaves: -fast -fma=fused -xpagesize=4M -xipo=2 -xcache=generic
-xunroll=4 -xprefetch=latx:3

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xprefetch=no%auto -xlinkopt

434.zeusmp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2
-xprefetch_level=2 -xprefetch=latx:3 -xO4 -ll2amm

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2
-xprefetch_level=1 -xunroll=7 -ll2amm

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xprefetch=latx:2

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xprefetch=no%auto -xO4 -xunroll=3
-lfast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7
SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=tcov:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xpagesize=4M -xipo=2 -xprefetch=latx:0.5
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
-xinline= -xchip=generic -fsimple=0

436.cactusADM: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xpagesize=4M -xipo=2 -xvector -xunroll=8
-xprefetch=latx:3 -xalias_level=std

481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xpagesize=4M -xalias_level=std -xipo=2
-xcache=generic -xunroll=5 -xprefetch=latx:2

Peak Other Flags

C benchmarks:
-xjobs=2 -V -#

C++ benchmarks:
-xjobs=2 -verbose=diags,version

Fortran benchmarks:
-xjobs=2 -V -v

Benchmarks using both Fortran and C:
-xjobs=2 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp2006 = 16.7

SPECfp_base2006 = 15.8

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:41:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.