



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp®2006 = 45.2

SPECfp\_base2006 = 42.1

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

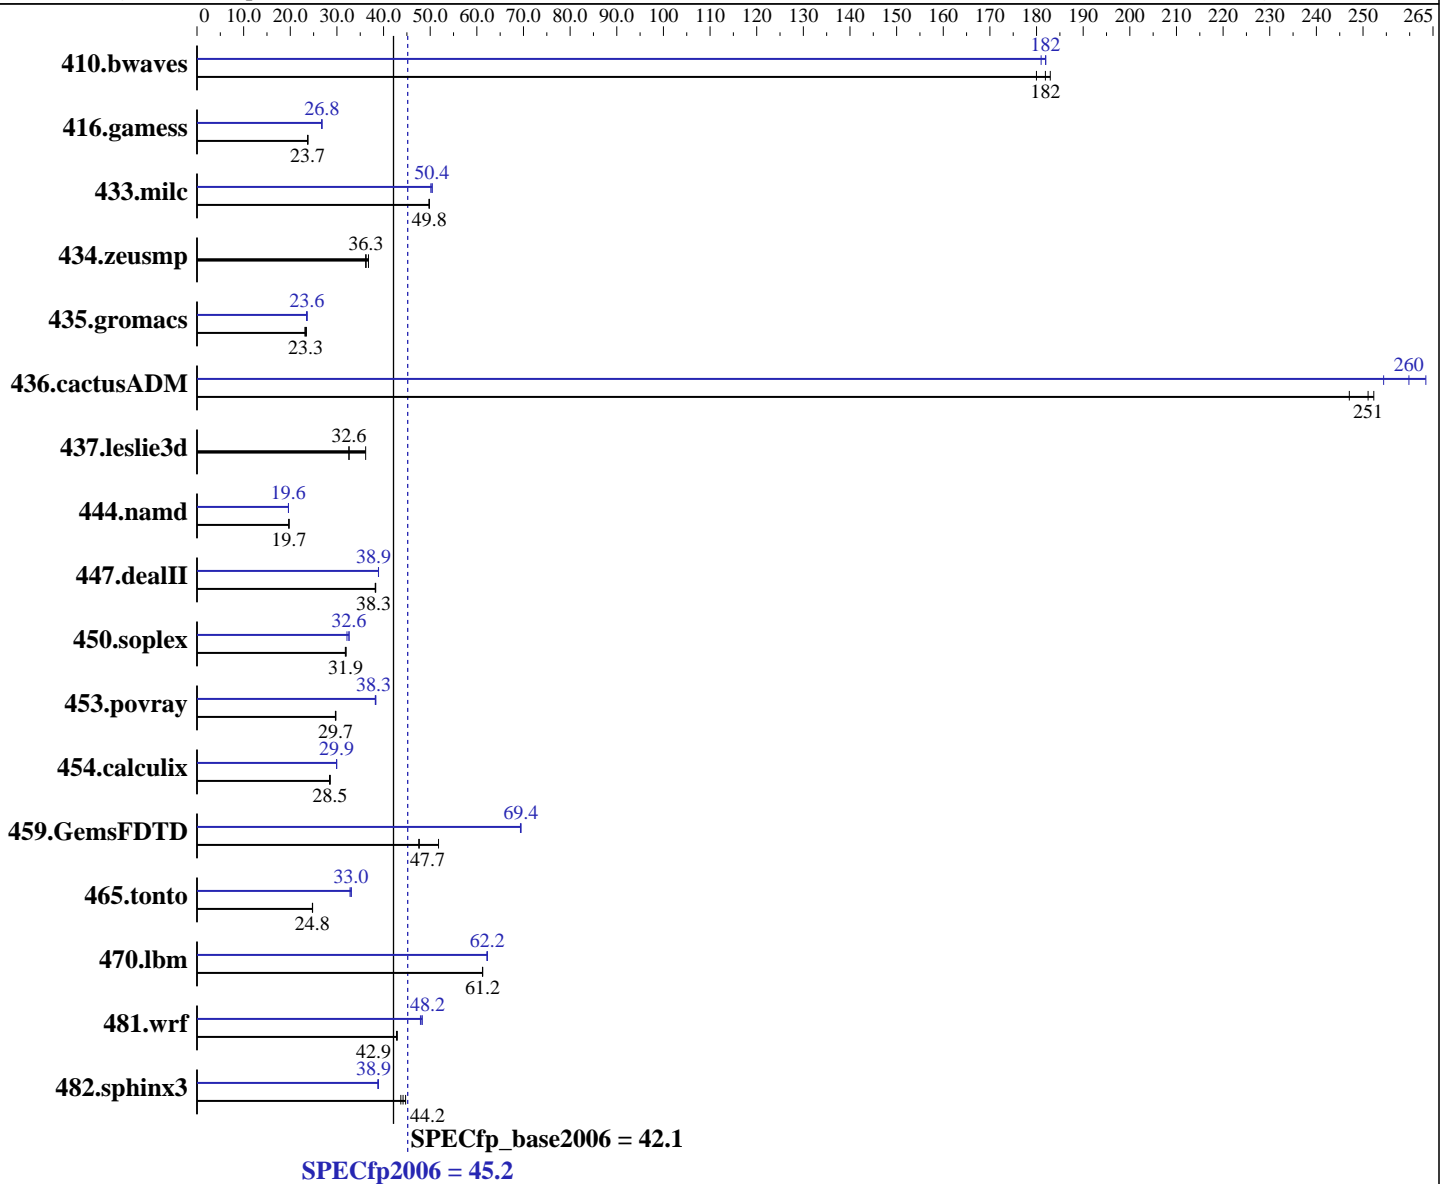

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp2006 = 45.2

SPECfp\_base2006 = 42.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	75.5	180	<b><u>74.7</u></b>	<b><u>182</u></b>	74.3	183	75.1	181	<b><u>74.7</u></b>	<b><u>182</u></b>	74.7	182
416.gamess	824	23.8	825	23.7	<b><u>825</u></b>	<b><u>23.7</u></b>	<b><u>731</u></b>	<b><u>26.8</u></b>	732	26.7	731	26.8
433.milc	184	49.8	<b><u>184</u></b>	<b><u>49.8</u></b>	184	49.8	183	50.1	<b><u>182</u></b>	<b><u>50.4</u></b>	182	50.4
434.zeusmp	248	36.8	<b><u>251</u></b>	<b><u>36.3</u></b>	252	36.2	248	36.8	<b><u>251</u></b>	<b><u>36.3</u></b>	252	36.2
435.gromacs	304	23.5	<b><u>307</u></b>	<b><u>23.3</u></b>	309	23.1	304	23.5	<b><u>303</u></b>	<b><u>23.6</u></b>	302	23.6
436.cactusADM	48.4	247	<b><u>47.6</u></b>	<b><u>251</u></b>	47.4	252	<b><u>46.0</u></b>	<b><u>260</u></b>	47.0	254	45.4	263
437.leslie3d	260	36.2	<b><u>288</u></b>	<b><u>32.6</u></b>	289	32.6	260	36.2	<b><u>288</u></b>	<b><u>32.6</u></b>	289	32.6
444.namd	<b><u>407</u></b>	<b><u>19.7</u></b>	407	19.7	407	19.7	409	19.6	409	19.6	<b><u>409</u></b>	<b><u>19.6</u></b>
447.dealII	299	38.3	<b><u>299</u></b>	<b><u>38.3</u></b>	299	38.2	294	38.9	294	38.9	<b><u>294</u></b>	<b><u>38.9</u></b>
450.soplex	<b><u>261</u></b>	<b><u>31.9</u></b>	261	32.0	262	31.8	259	32.2	<b><u>256</u></b>	<b><u>32.6</u></b>	256	32.6
453.povray	179	29.8	<b><u>179</u></b>	<b><u>29.7</u></b>	179	29.7	139	38.3	139	38.2	<b><u>139</u></b>	<b><u>38.3</u></b>
454.calculix	289	28.6	290	28.4	<b><u>289</u></b>	<b><u>28.5</u></b>	276	29.9	276	29.9	<b><u>276</u></b>	<b><u>29.9</u></b>
459.GemsFDTD	223	47.5	<b><u>223</u></b>	<b><u>47.7</u></b>	205	51.8	153	69.4	<b><u>153</u></b>	<b><u>69.4</u></b>	153	69.4
465.tonto	397	24.8	398	24.8	<b><u>398</u></b>	<b><u>24.8</u></b>	297	33.1	300	32.8	<b><u>298</u></b>	<b><u>33.0</u></b>
470.lbm	224	61.2	225	61.2	<b><u>224</u></b>	<b><u>61.2</u></b>	221	62.2	221	62.3	<b><u>221</u></b>	<b><u>62.2</u></b>
481.wrf	260	42.9	261	42.8	<b><u>260</u></b>	<b><u>42.9</u></b>	231	48.3	<b><u>232</u></b>	<b><u>48.2</u></b>	233	47.9
482.sphinx3	446	43.7	<b><u>441</u></b>	<b><u>44.2</u></b>	436	44.7	<b><u>501</u></b>	<b><u>38.9</u></b>	503	38.8	501	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

## Platform Notes

Fan speed set to Full Speed and Data Reuse Optimization disabled in BIOS Setup.  
The system uses a Supermicro X8DTT-HIBQF+ motherboard.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp2006 = 45.2

SPECfp\_base2006 = 42.1

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Dec-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp2006 = 45.2

SPECfp\_base2006 = 42.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp2006 = 45.2

SPECfp\_base2006 = 42.1

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20101123.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6026TT-HIBQF  
(Intel Xeon X5670, 2.93GHz)

SPECfp2006 = 45.2

SPECfp\_base2006 = 42.1

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Dec-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20101123.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:46:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 December 2010.