



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 429

SPECint_rate_base2006 = 369

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2010

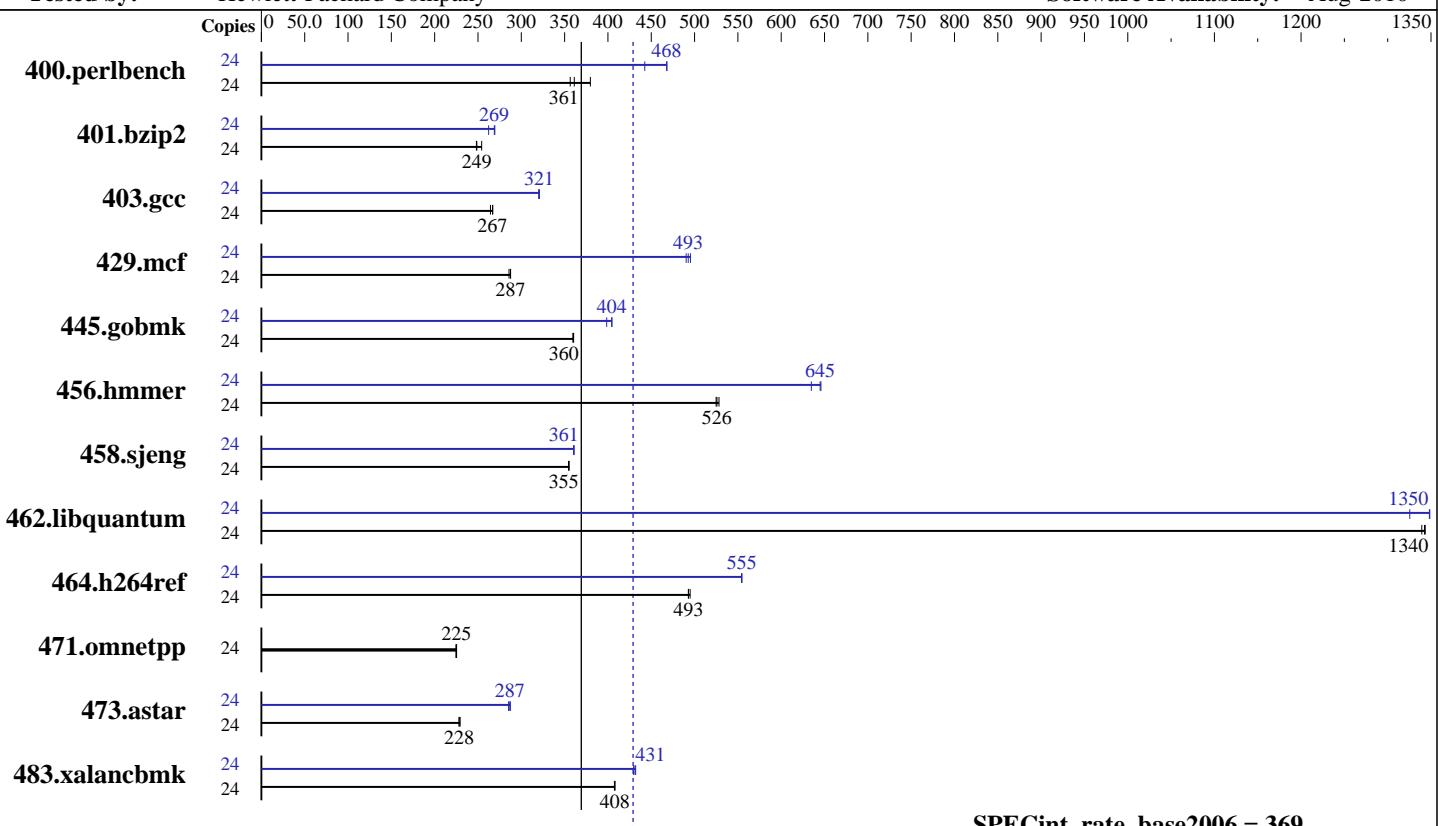

SPECint_rate_base2006 = 369

SPECint_rate2006 = 429

Hardware

CPU Name:	AMD Opteron 6180 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 146 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1 Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 429

SPECint_rate_base2006 = 369

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	617	380	658	356	649	361	24	530	442	501	468	501	468
401.bzip2	24	911	254	933	248	931	249	24	883	262	861	269	859	269
403.gcc	24	724	267	724	267	731	264	24	602	321	604	320	603	321
429.mcf	24	766	286	761	287	761	288	24	444	493	442	495	446	490
445.gobmk	24	699	360	699	360	700	360	24	632	399	623	404	622	405
456.hmmer	24	424	528	427	525	426	526	24	353	635	347	646	347	645
458.sjeng	24	819	355	819	355	818	355	24	805	361	805	361	805	361
462.libquantum	24	370	1340	370	1340	371	1340	24	375	1330	369	1350	369	1350
464.h264ref	24	1077	493	1073	495	1078	493	24	958	555	958	555	958	554
471.omnetpp	24	668	225	666	225	666	225	24	668	225	666	225	666	225
473.astar	24	734	229	738	228	738	228	24	588	287	586	287	591	285
483.xalancbmk	24	406	408	406	408	406	408	24	385	430	383	432	384	431

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 429

SPECint_rate_base2006 = 369

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 429

SPECint_rate_base2006 = 369

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2010

Peak Portability Flags (Continued)

```
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
    464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
    -OPT:unroll_times_max=8 -OPT:unroll_size=256
    -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
    -CG:local_sched_alg=1 -CG:unroll_fb_req=on
    -HP:bdt=2m:heap=2m
```

```
401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
    -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

```
403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
    -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
    -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
```

```
429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
    -CG:gcm=off -GRA:prioritize_by_density=on -m32
    -HP:bdt=2m:heap=2m
```

```
445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
    -OPT:unroll_times_max=8 -OPT:unroll_size=256
    -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
    -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
    -LNO:ignore_feedback=off -CG:p2align=on
    -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m
```

```
456.hmmr: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
    -OPT:alias=disjoint -OPT:unroll_times_max=8
    -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
    -CG:local_sched_alg=1 -CG:cflow=0
    -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
    -HP:bdt=2m:heap=2m
```

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
    -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
    -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
    -IPA:pu_reorder=2 -CG:ptr_load_use=0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.5 GHz AMD Opteron 6180 SE)

SPECint_rate2006 = 429

SPECint_rate_base2006 = 369

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2010

Peak Optimization Flags (Continued)

458.sjeng (continued):

```
-OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetch_nta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:10:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 February 2011.