




# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

BladeSymphony BS2000 (Intel Xeon E5649)

**SPECfp®2006 = 51.2**

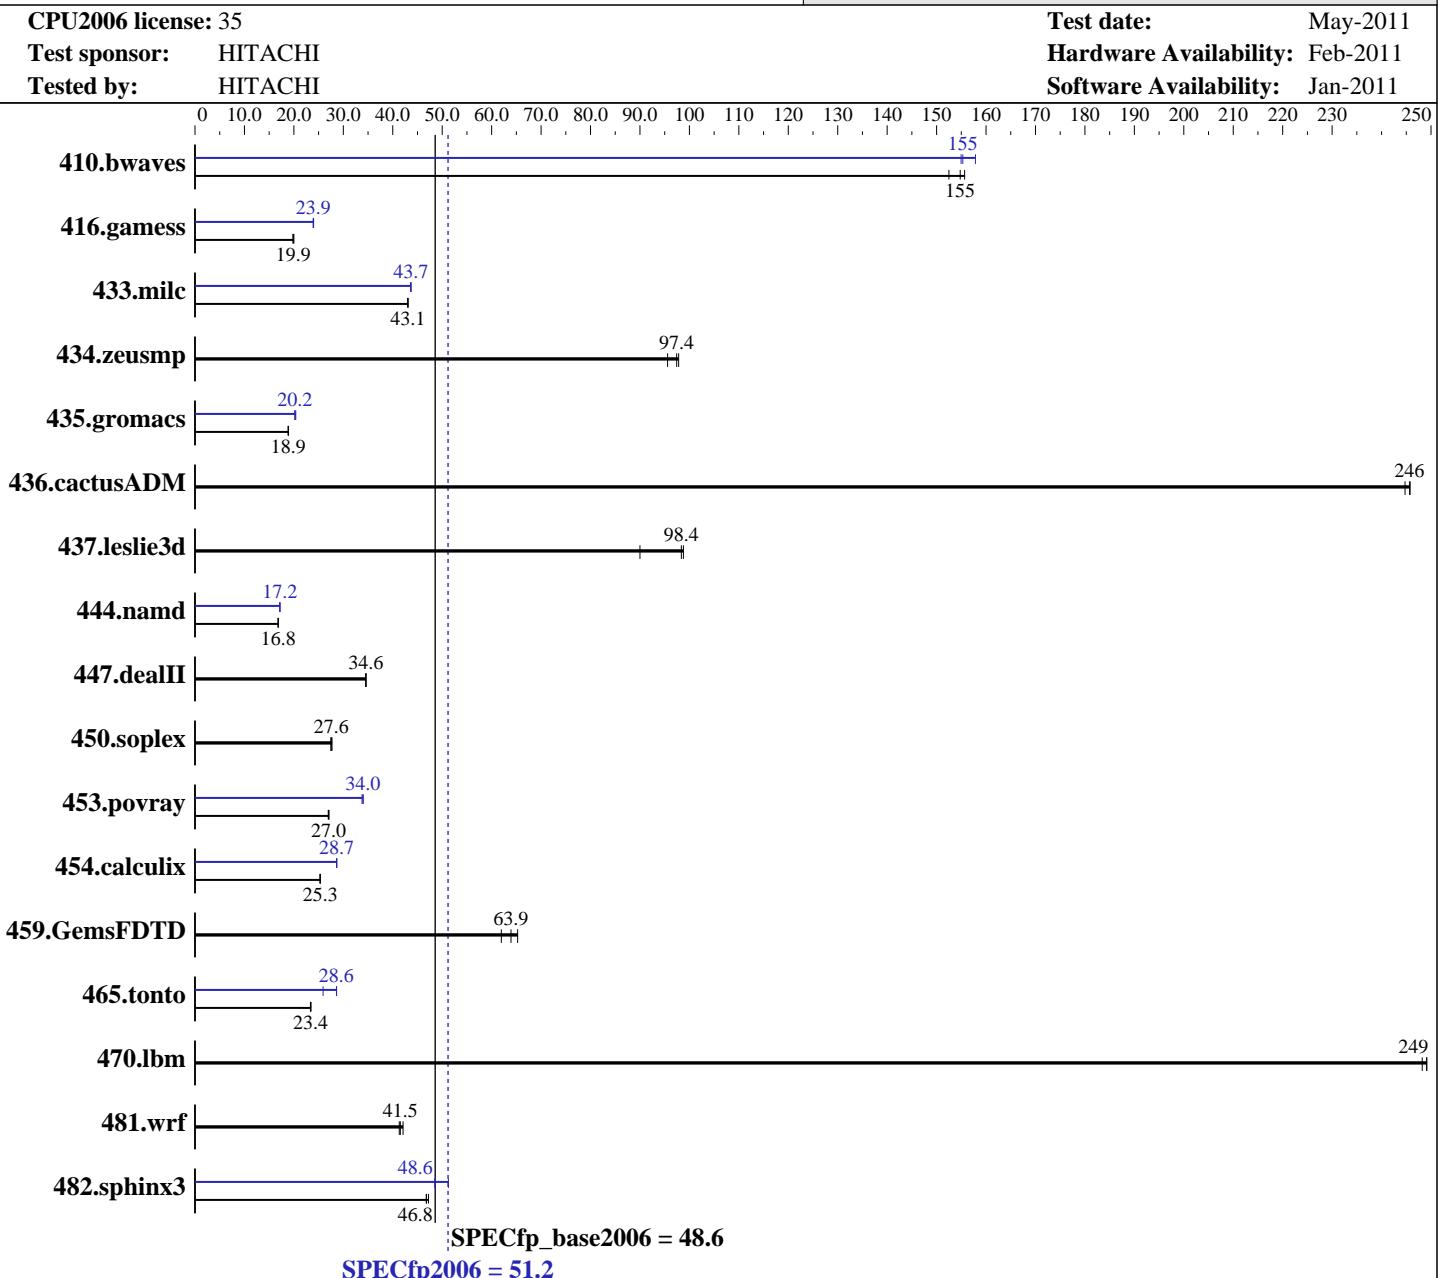

## Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86\_64  
 Compiler: Intel C++ Compiler XE for Linux Version 12.0.3.174 Build 20110309  
 Intel Fortran Compiler XE for Linux Version 12.0.3.174 Build 20110309  
 Auto Parallel: Yes  
 File System: ext3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

BladeSymphony BS2000 (Intel Xeon E5649)

**SPECfp2006 = 51.2**

CPU2006 license: 35

Test date: May-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2011

Tested by: HITACHI

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB 10000 rpm SAS RAID1 configuration  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	89.1	152	<b>87.8</b>	<b>155</b>	87.3	156	<b>87.7</b>	<b>155</b>	<b>87.5</b>	<b>155</b>	86.1	158
416.gamess	979	20.0	988	19.8	<b>986</b>	<b>19.9</b>	816	24.0	<b>818</b>	<b>23.9</b>	819	23.9
433.milc	213	43.1	<b>213</b>	<b>43.1</b>	213	43.0	<b>211</b>	43.6	<b>210</b>	<b>43.7</b>	210	43.7
434.zeusmp	<b>93.4</b>	<b>97.4</b>	95.2	95.6	93.0	97.8	<b>93.4</b>	<b>97.4</b>	95.2	95.6	93.0	97.8
435.gromacs	377	18.9	379	18.8	<b>378</b>	<b>18.9</b>	350	20.4	<b>353</b>	<b>20.2</b>	354	20.2
436.cactusADM	<b>48.6</b>	<b>246</b>	48.6	246	48.8	245	<b>48.6</b>	<b>246</b>	48.6	246	48.8	245
437.leslie3d	104	90.0	<b>95.6</b>	<b>98.4</b>	95.2	98.8	104	90.0	<b>95.6</b>	<b>98.4</b>	95.2	98.8
444.namd	477	16.8	476	16.8	<b>477</b>	<b>16.8</b>	<b>467</b>	<b>17.2</b>	467	17.2	467	17.2
447.dealII	331	34.5	331	34.6	<b>331</b>	<b>34.6</b>	331	34.5	331	34.6	<b>331</b>	<b>34.6</b>
450.soplex	<b>303</b>	<b>27.6</b>	303	27.5	301	27.7	<b>303</b>	<b>27.6</b>	303	27.5	301	27.7
453.povray	196	27.1	197	26.9	<b>197</b>	<b>27.0</b>	<b>156</b>	<b>34.0</b>	156	34.0	157	33.8
454.calculix	<b>326</b>	<b>25.3</b>	325	25.4	326	25.3	288	28.6	288	28.7	<b>288</b>	<b>28.7</b>
459.GemsFDTD	<b>166</b>	<b>63.9</b>	171	62.0	163	65.3	<b>166</b>	<b>63.9</b>	171	62.0	163	65.3
465.tonto	419	23.5	<b>421</b>	<b>23.4</b>	421	23.3	344	28.6	<b>344</b>	<b>28.6</b>	380	25.9
470.lbm	55.4	248	55.1	249	<b>55.2</b>	<b>249</b>	55.4	248	55.1	249	<b>55.2</b>	<b>249</b>
481.wrf	270	41.3	265	42.1	<b>269</b>	<b>41.5</b>	270	41.3	265	42.1	<b>269</b>	<b>41.5</b>
482.sphinx3	417	46.8	<b>416</b>	<b>46.8</b>	413	47.2	<b>380</b>	<b>51.3</b>	<b>401</b>	<b>48.6</b>	402	48.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run Hugepages was enabled with the following:

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:

Intel HT Technology = Disabled

Data Reuse Optimization = Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon E5649)

SPECfp2006 =

51.2

SPECfp\_base2006 =

48.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

May-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

BladeSymphony BS2000 (Intel Xeon E5649)

**SPECfp2006 =**

**51.2**

**SPECfp\_base2006 =**

**48.6**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:**

May-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -ansi-alias
```

470.lbm: basepeak = yes

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
              -parallel
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
             -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon E5649)

SPECfp2006 =

51.2

SPECfp\_base2006 =

48.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

May-2011

Hardware Availability:

Feb-2011

Software Availability:

Jan-2011

## Peak Optimization Flags (Continued)

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:53:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 June 2011.