



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint®\_rate2006 = 84.0

Intel DH67BLB3 Motherboard (Intel Core i3-2120)

SPECint\_rate\_base2006 = 79.0

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

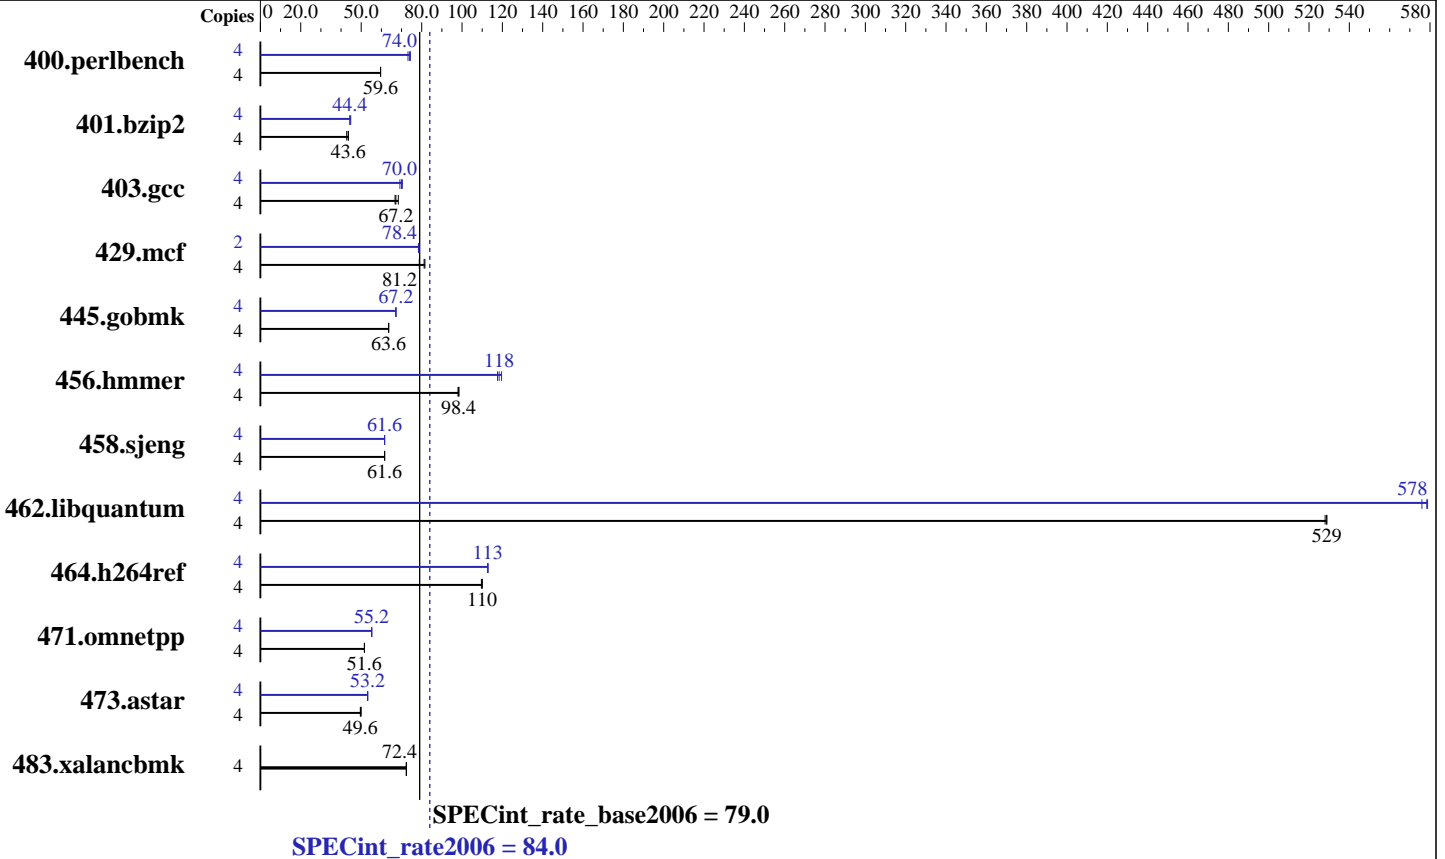

### Hardware

CPU Name: Intel Core i3-2120  
 CPU Characteristics:  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)  
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309  
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 84.0

Intel DH67BLB3 Motherboard (Intel Core i3-2120)

SPECint\_rate\_base2006 = 79.0

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	658	59.6	<b>658</b>	<b>59.6</b>	657	59.6	4	525	74.4	<b>529</b>	<b>74.0</b>	533	73.2
401.bzip2	4	903	42.8	<b>886</b>	<b>43.6</b>	885	43.6	4	863	44.8	867	44.4	<b>866</b>	<b>44.4</b>
403.gcc	4	<b>478</b>	<b>67.2</b>	482	66.8	470	68.4	4	458	70.4	<b>459</b>	<b>70.0</b>	464	69.2
429.mcf	4	448	81.6	463	78.8	<b>449</b>	<b>81.2</b>	2	232	78.8	<b>233</b>	<b>78.4</b>	233	78.4
445.gobmk	4	658	63.6	<b>659</b>	<b>63.6</b>	659	63.6	4	<b>625</b>	<b>67.2</b>	625	67.2	625	67.2
456.hammer	4	379	98.4	381	98.0	<b>379</b>	<b>98.4</b>	4	312	120	317	118	<b>315</b>	<b>118</b>
458.sjeng	4	<b>787</b>	<b>61.6</b>	787	61.6	787	61.6	4	784	61.6	784	61.6	<b>784</b>	<b>61.6</b>
462.libquantum	4	157	529	157	528	<b>157</b>	<b>529</b>	4	143	579	<b>143</b>	<b>578</b>	144	576
464.h264ref	4	808	110	<b>806</b>	<b>110</b>	805	110	4	<b>784</b>	<b>113</b>	784	113	784	113
471.omnetpp	4	<b>483</b>	<b>51.6</b>	483	51.6	483	51.6	4	452	55.2	<b>452</b>	<b>55.2</b>	453	55.2
473.astar	4	565	49.6	<b>564</b>	<b>49.6</b>	564	50.0	4	528	53.2	527	53.2	<b>527</b>	<b>53.2</b>
483.xalancbmk	4	381	72.4	<b>381</b>	<b>72.4</b>	381	72.4	4	381	72.4	<b>381</b>	<b>72.4</b>	381	72.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

## Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 84.0

Intel DH67BLB3 Motherboard (Intel Core i3-2120)

SPECint\_rate\_base2006 = 79.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

## Base Optimization Flags

C benchmarks:

`-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

C++ benchmarks:

`-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features /F512000000 shlw32M.lib -link /FORCE:MULTIPLE`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icl -Qvc9 -Qstd=c99`

`456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):

`icl -Qvc9`

`473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

## Peak Portability Flags

`403.gcc: -DSPEC_CPU_WIN32`

`456.hmmr: -DSPEC_CPU_P64`

`458.sjeng: -DSPEC_CPU_P64`

`462.libquantum: -DSPEC_CPU_P64`

`464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES`

`473.astar: -DSPEC_CPU_P64`

`483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 84.0

Intel DH67BLB3 Motherboard (Intel Core i3-2120)

SPECint\_rate\_base2006 = 79.0

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000  
shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlW64M.lib  
-link /FORCE:MULTIPLE

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 84.0

Intel DH67BLB3 Motherboard (Intel Core i3-2120)

SPECint\_rate\_base2006 = 79.0

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 00:14:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 August 2011.