



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 32.8

Express5800/GT110d-S (Intel Pentium G620)

SPECint_base2006 = 31.0

CPU2006 license: 9006


Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

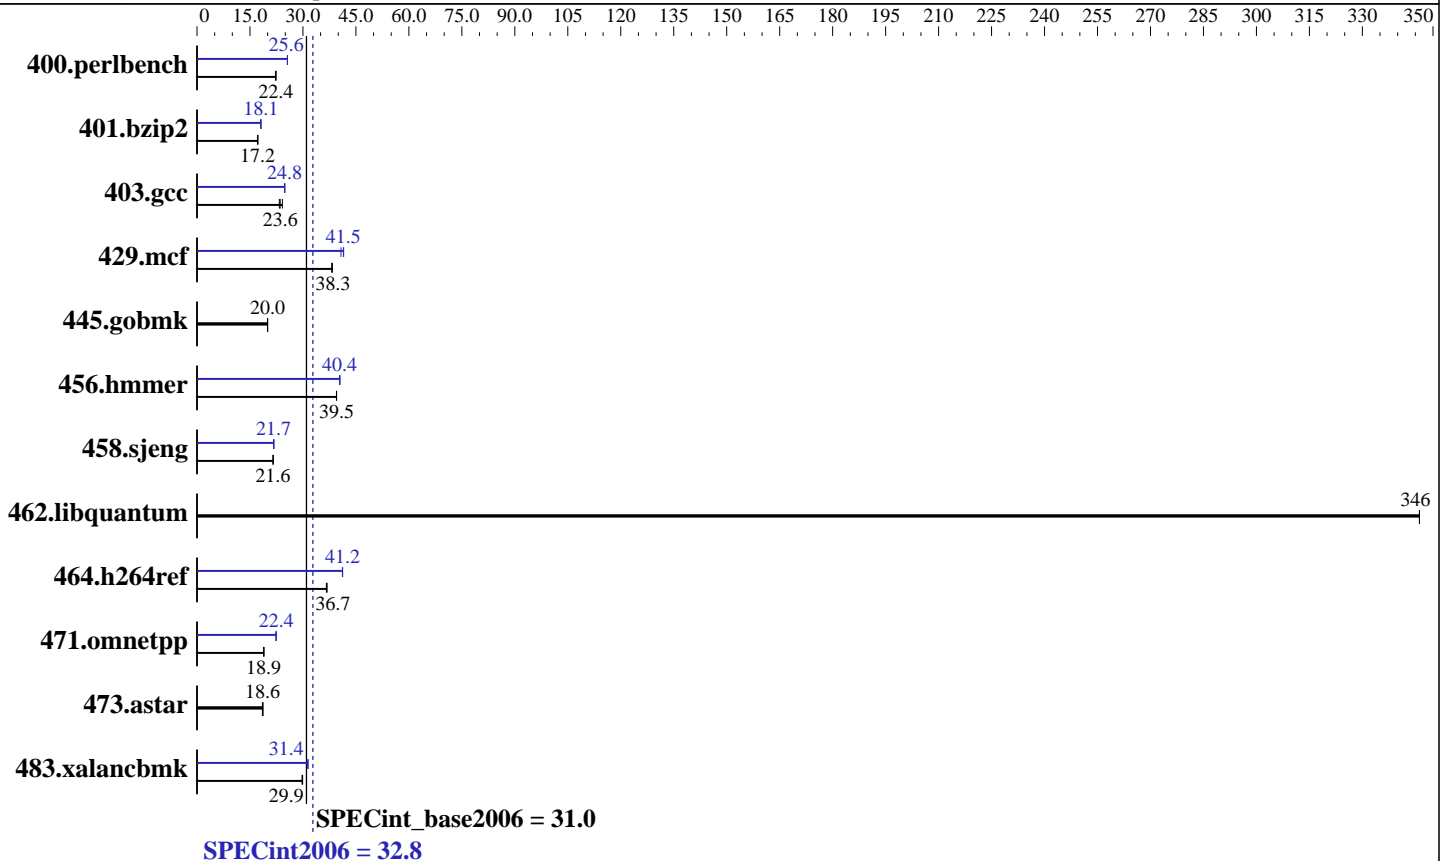

Hardware

CPU Name: Intel Pentium G620
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 32.8

Express5800/GT110d-S (Intel Pentium G620)

SPECint_base2006 = 31.0

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	440	22.2	437	22.4	437	22.4	381	25.6	381	25.6	382	25.6
401.bzip2	561	17.2	561	17.2	561	17.2	534	18.1	533	18.1	534	18.1
403.gcc	333	24.2	345	23.3	342	23.6	324	24.8	324	24.8	324	24.8
429.mcf	238	38.3	239	38.2	238	38.3	220	41.5	224	40.8	220	41.5
445.gobmk	525	20.0	525	20.0	524	20.0	525	20.0	525	20.0	524	20.0
456.hammer	236	39.5	236	39.5	236	39.5	231	40.4	231	40.4	231	40.4
458.sjeng	562	21.5	561	21.6	561	21.6	557	21.7	557	21.7	556	21.7
462.libquantum	59.9	346	59.9	346	59.9	346	59.9	346	59.9	346	59.9	346
464.h264ref	601	36.8	604	36.6	602	36.7	537	41.2	537	41.2	537	41.2
471.omnetpp	330	18.9	331	18.9	331	18.9	279	22.4	279	22.4	279	22.4
473.astar	378	18.6	375	18.7	379	18.5	378	18.6	375	18.7	379	18.5
483.xalancbmk	231	29.9	232	29.7	231	29.9	220	31.3	220	31.4	220	31.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Default BIOS settings were used.

General Notes

OMP_NUM_THREADS set to number of cores
 The Express5800/GT110d (Intel Pentium G620) and
 the Express5800/GT110d-S (Intel Pentium G620) models are electronically equivalent.
 The results have been measured on the Express5800/GT110d-S (Intel Pentium G620) model.

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 32.8

Express5800/GT110d-S (Intel Pentium G620)

SPECint_base2006 = 31.0

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

400.perlbench: icc -m32

```

```

429.mcf: icc -m32

```

```

464.h264ref: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 32.8

Express5800/GT110d-S (Intel Pentium G620)

SPECint_base2006 = 31.0

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32
          -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -auto-ilp32 -ansi-alias
          -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: basepeak = yes

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECint2006 =	32.8
Express5800/GT110d-S (Intel Pentium G620)	SPECint_base2006 =	31.0

CPU2006 license: 9006	Test date: Jul-2011
Test sponsor: NEC Corporation	Hardware Availability: Jun-2011
Tested by: NEC Corporation	Software Availability: Mar-2011

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias
             -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
             -L/opt/SmartHeap_8.1/lib -lsmartheap
             -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

473.astar: basepeak = yes

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
              -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
              -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:18:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 August 2011.