



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

SPECfp\_base2006 = **45.7**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

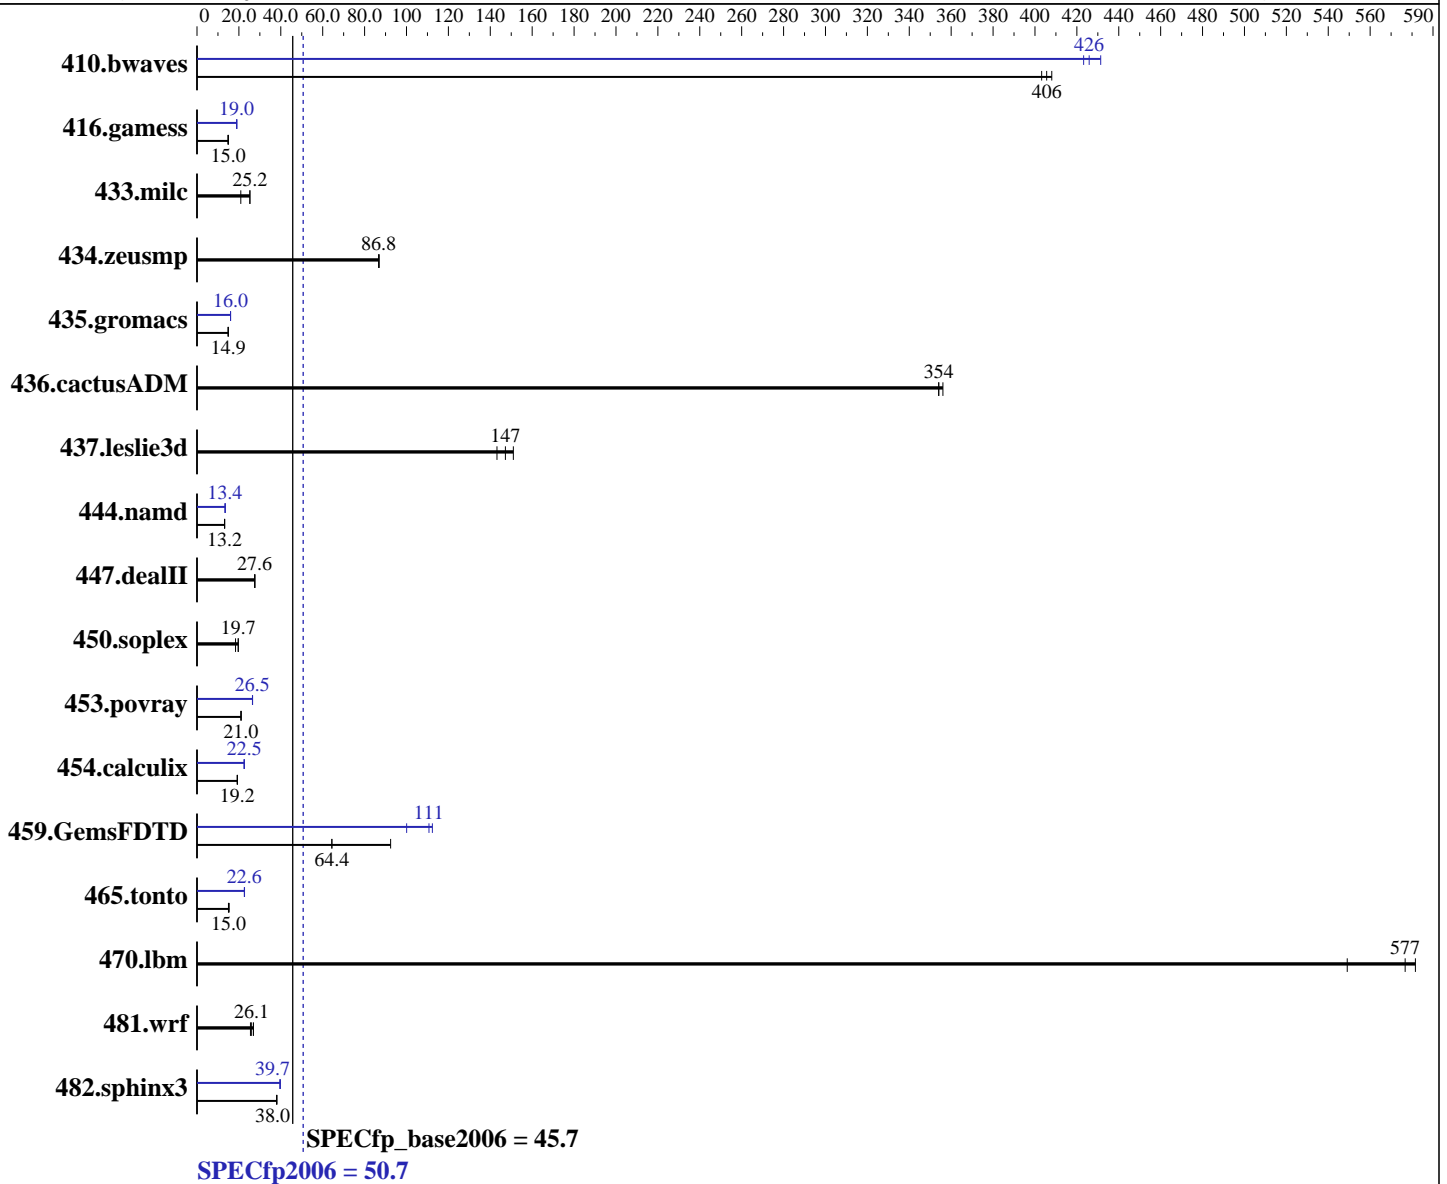

### Hardware

CPU Name: Intel Xeon E7-4820  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.4.191 Build 20110427  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

SPECfp\_base2006 = **45.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2011

Hardware Availability: Jul-2011

Software Availability: Jul-2011

L3 Cache: 18 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC, running at 978 MHz)  
Disk Subsystem: 1 x SAS, 600 GB, 10000 RPM  
Other Hardware: --

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.3	408	33.7	403	<b>33.5</b>	<b>406</b>	32.1	423	31.5	431	<b>31.9</b>	<b>426</b>
416.gamess	1327	14.8	1306	15.0	<b>1308</b>	<b>15.0</b>	1032	19.0	1033	19.0	<b>1033</b>	<b>19.0</b>
433.milc	439	20.9	363	25.3	<b>364</b>	<b>25.2</b>	439	20.9	363	25.3	<b>364</b>	<b>25.2</b>
434.zeusmp	105	86.9	<b>105</b>	<b>86.8</b>	105	86.8	105	86.9	<b>105</b>	<b>86.8</b>	105	86.8
435.gromacs	478	14.9	<b>479</b>	<b>14.9</b>	480	14.9	446	16.0	<b>446</b>	<b>16.0</b>	446	16.0
436.cactusADM	33.8	354	<b>33.7</b>	<b>354</b>	33.6	356	33.8	354	<b>33.7</b>	<b>354</b>	33.6	356
437.leslie3d	62.2	151	65.6	143	<b>63.9</b>	<b>147</b>	62.2	151	65.6	143	<b>63.9</b>	<b>147</b>
444.namd	<b>608</b>	<b>13.2</b>	608	13.2	609	13.2	597	13.4	<b>597</b>	<b>13.4</b>	597	13.4
447.dealII	<b>415</b>	<b>27.6</b>	415	27.5	414	27.6	<b>415</b>	<b>27.6</b>	415	27.5	414	27.6
450.soplex	423	19.7	453	18.4	<b>424</b>	<b>19.7</b>	423	19.7	453	18.4	<b>424</b>	<b>19.7</b>
453.povray	252	21.1	<b>253</b>	<b>21.0</b>	254	21.0	201	26.5	200	26.5	<b>201</b>	<b>26.5</b>
454.calculix	427	19.3	429	19.2	<b>429</b>	<b>19.2</b>	366	22.6	366	22.5	<b>366</b>	<b>22.5</b>
459.GemsFDTD	115	92.4	<b>165</b>	<b>64.4</b>	165	64.4	106	100	<b>95.8</b>	<b>111</b>	94.4	112
465.tonto	<b>654</b>	<b>15.0</b>	640	15.4	655	15.0	434	22.7	<b>435</b>	<b>22.6</b>	435	22.6
470.lbm	25.0	549	23.6	582	<b>23.8</b>	<b>577</b>	25.0	549	23.6	582	<b>23.8</b>	<b>577</b>
481.wrf	438	25.5	414	27.0	<b>428</b>	<b>26.1</b>	438	25.5	414	27.0	<b>428</b>	<b>26.1</b>
482.sphinx3	511	38.1	512	38.0	<b>512</b>	<b>38.0</b>	<b>491</b>	<b>39.7</b>	492	39.6	490	39.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodet /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 28800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable  
Performance/Power Setting = Traditional  
Intel HT Technology = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

**SPECfp\_base2006 = 45.7**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Aug-2011  
**Hardware Availability:** Jul-2011  
**Software Availability:** Jul-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries were compiled on RHEL5.5  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

**SPECfp\_base2006 = 45.7**

**CPU2006 license:** 19

**Test date:** Aug-2011

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2011

**Tested by:** Fujitsu

**Software Availability:** Jul-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

447.dealIII: `basepeak = yes`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

**SPECfp\_base2006 = 45.7**

CPU2006 license: 19

Test date: Aug-2011

Test sponsor: Fujitsu

Hardware Availability: Jul-2011

Tested by: Fujitsu

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20110705.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20110705.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 50.7**

PRIMERGY RX600 S6, Intel Xeon E7-4820, 2.00 GHz

**SPECfp\_base2006 = 45.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2011

**Hardware Availability:** Jul-2011

**Software Availability:** Jul-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 22:37:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 September 2011.