



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = 51.5

## Huawei BH620, Intel Xeon E5645

SPECfp\_base2006 = 47.7

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

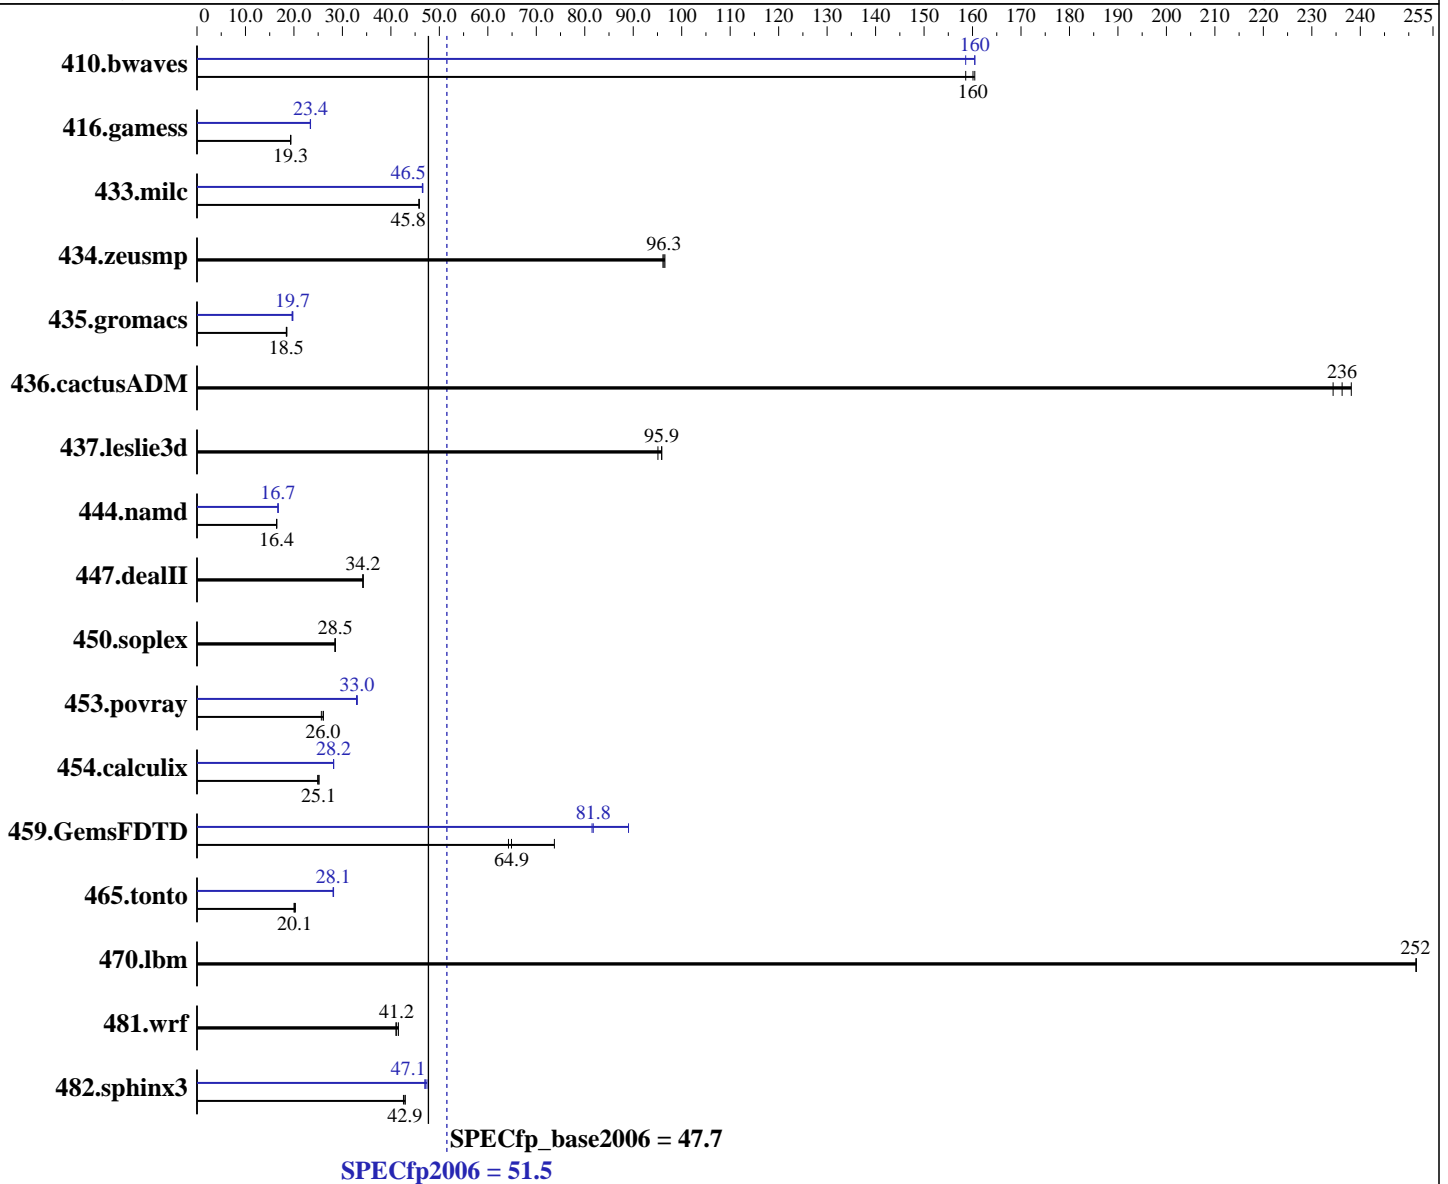

### Hardware

CPU Name: Intel Xeon E5645  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.8 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64),  
 Kernel 2.6.32.12-0.7-default  
 Compiler: C++: Version 12.0 Update 3 of Intel 64  
 Compiler XE Build 20101116;  
 Fortran: Version 12.0 Update 3 of Intel 64  
 Compiler XE Build 20101116  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 51.5

Huawei BH620, Intel Xeon E5645

SPECfp\_base2006 = 47.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 15K RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.7	159	<b>84.9</b>	<b>160</b>	84.7	160	84.7	160	85.7	159	<b>84.7</b>	<b>160</b>
416.gamess	<b>1013</b>	<b>19.3</b>	1015	19.3	1012	19.3	838	23.4	<b>836</b>	<b>23.4</b>	836	23.4
433.milc	200	45.8	<b>200</b>	<b>45.8</b>	200	45.9	197	46.6	<b>197</b>	<b>46.5</b>	197	46.5
434.zeusmp	<b>94.5</b>	<b>96.3</b>	94.7	96.1	94.3	96.5	<b>94.5</b>	<b>96.3</b>	94.7	96.1	94.3	96.5
435.gromacs	387	18.4	<b>387</b>	<b>18.5</b>	385	18.6	361	19.8	364	19.6	<b>362</b>	<b>19.7</b>
436.cactusADM	<b>50.6</b>	<b>236</b>	50.2	238	51.0	234	<b>50.6</b>	<b>236</b>	50.2	238	51.0	234
437.leslie3d	98.0	95.9	<b>98.0</b>	<b>95.9</b>	98.8	95.1	98.0	95.9	<b>98.0</b>	<b>95.9</b>	98.8	95.1
444.namd	<b>488</b>	<b>16.4</b>	488	16.4	488	16.4	480	16.7	479	16.7	<b>480</b>	<b>16.7</b>
447.dealII	<b>334</b>	<b>34.2</b>	334	34.3	334	34.2	<b>334</b>	<b>34.2</b>	334	34.3	334	34.2
450.soplex	<b>293</b>	<b>28.5</b>	292	28.5	293	28.5	<b>293</b>	<b>28.5</b>	292	28.5	293	28.5
453.povray	<b>204</b>	<b>26.0</b>	207	25.7	204	26.1	162	32.9	161	33.1	<b>161</b>	<b>33.0</b>
454.calculix	<b>328</b>	<b>25.1</b>	328	25.2	331	24.9	<b>293</b>	<b>28.2</b>	293	28.2	293	28.2
459.GemsFDTD	144	73.7	165	64.3	<b>164</b>	<b>64.9</b>	130	81.5	<b>130</b>	<b>81.8</b>	119	89.0
465.tonto	485	20.3	<b>489</b>	<b>20.1</b>	492	20.0	349	28.2	<b>350</b>	<b>28.1</b>	350	28.1
470.lbm	54.6	252	54.6	252	<b>54.6</b>	<b>252</b>	54.6	252	54.6	252	<b>54.6</b>	<b>252</b>
481.wrf	269	41.6	272	41.0	<b>271</b>	<b>41.2</b>	269	41.6	272	41.0	<b>271</b>	<b>41.2</b>
482.sphinx3	454	43.0	<b>454</b>	<b>42.9</b>	458	42.6	411	47.4	415	47.0	<b>414</b>	<b>47.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

Data Reuse Optimization disabled in BIOS Setup.  
Intel HT technology Disabled in BIOS Setup.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECfp2006 =</b>	<b>51.5</b>
<b>Huawei BH620,Intel Xeon E5645</b>	<b>SPECfp_base2006 =</b>	<b>47.7</b>

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Sep-2011  
**Hardware Availability:** May-2011  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5  
OMP\_NUM\_THREADS set to number of cores

## Base Compiler Invocation

C benchmarks:  
`icc -m64`

C++ benchmarks:  
`icpc -m64`

Fortran benchmarks:  
`ifort -m64`

Benchmarks using both Fortran and C:  
`icc -m64 ifort -m64`

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:  
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	51.5
Huawei BH620, Intel Xeon E5645	SPECfp_base2006 =	47.7

CPU2006 license: 3175  
 Test sponsor: Huawei  
 Tested by: Huawei

Test date: Sep-2011  
 Hardware Availability: May-2011  
 Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:  
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
 -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
 -parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 51.5

Huawei BH620, Intel Xeon E5645

SPECfp\_base2006 = 47.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	51.5
Huawei BH620, Intel Xeon E5645	SPECfp_base2006 =	47.7

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Sep-2011  
Hardware Availability: May-2011  
Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:44:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 October 2011.