



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 42.9

Huawei RH2285, Intel Xeon X5670

SPECint_base2006 = 40.7

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

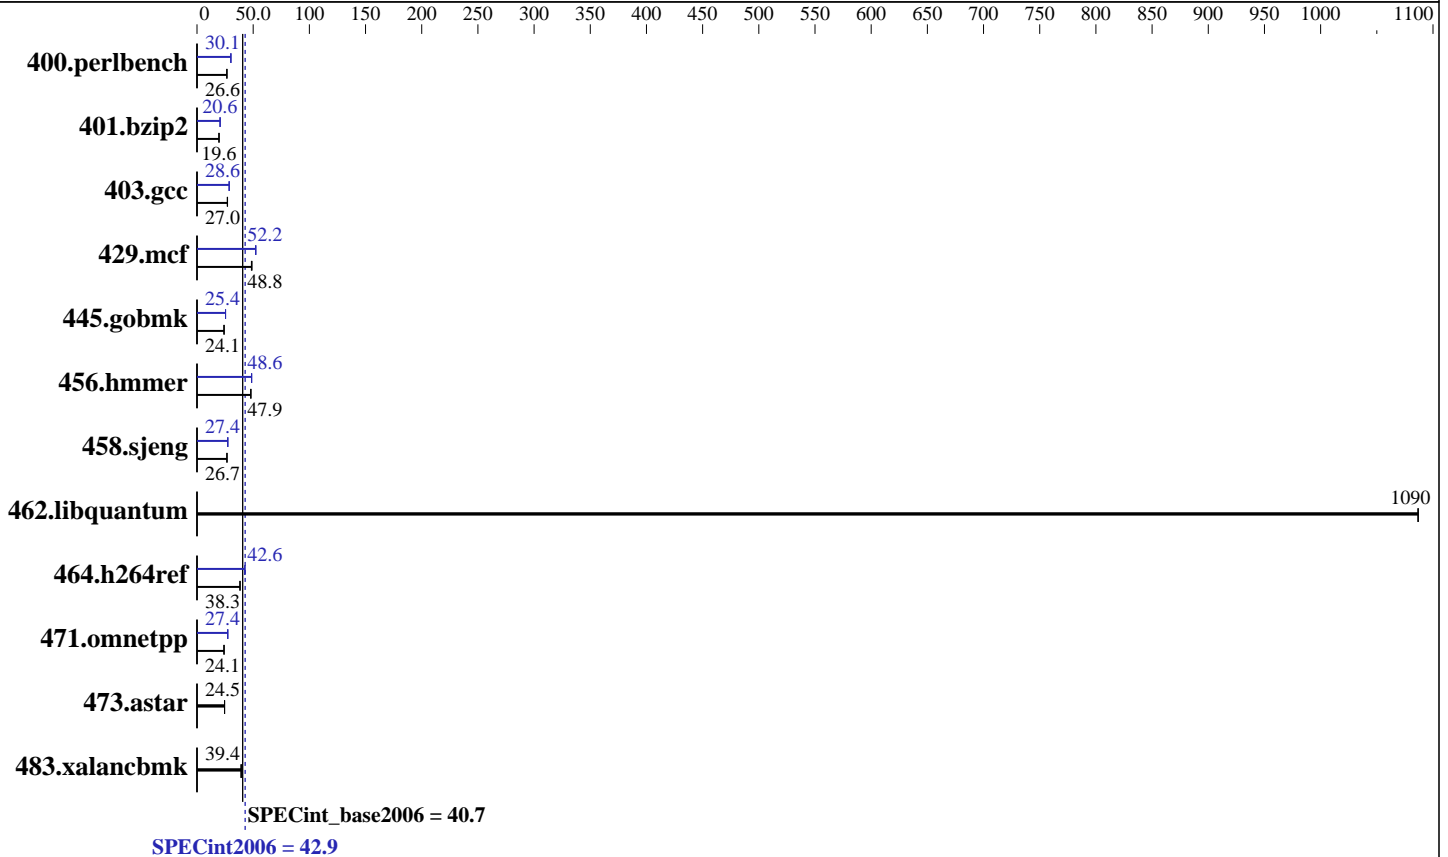

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: C++: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 42.9

Huawei RH2285, Intel Xeon X5670

SPECint_base2006 = 40.7

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 368 | 26.6 | <u>367</u> | <u>26.6</u> | 367 | 26.6 | <u>324</u> | <u>30.1</u> | 324 | 30.1 | 324 | 30.2 |
| 401.bzip2 | <u>493</u> | <u>19.6</u> | 493 | 19.6 | 493 | 19.6 | <u>469</u> | <u>20.6</u> | 469 | 20.6 | 469 | 20.6 |
| 403.gcc | 298 | 27.0 | <u>298</u> | <u>27.0</u> | 296 | 27.2 | 281 | 28.6 | <u>281</u> | <u>28.6</u> | 281 | 28.6 |
| 429.mcf | 188 | 48.4 | <u>187</u> | <u>48.8</u> | 187 | 48.8 | 175 | 52.2 | 174 | 52.4 | <u>175</u> | <u>52.2</u> |
| 445.gobmk | 436 | 24.1 | <u>436</u> | <u>24.1</u> | 436 | 24.1 | 413 | 25.4 | <u>413</u> | <u>25.4</u> | 413 | 25.4 |
| 456.hammer | 195 | 47.9 | <u>195</u> | <u>47.9</u> | 195 | 47.9 | 192 | 48.7 | <u>192</u> | <u>48.6</u> | 192 | 48.6 |
| 458.sjeng | 454 | 26.7 | 454 | 26.7 | <u>454</u> | <u>26.7</u> | 441 | 27.4 | <u>442</u> | <u>27.4</u> | 442 | 27.4 |
| 462.libquantum | 19.1 | 1090 | <u>19.1</u> | <u>1090</u> | 19.1 | 1090 | 19.1 | 1090 | <u>19.1</u> | <u>1090</u> | 19.1 | 1090 |
| 464.h264ref | 578 | 38.3 | <u>578</u> | <u>38.3</u> | 578 | 38.3 | 519 | 42.6 | <u>519</u> | <u>42.6</u> | 520 | 42.6 |
| 471.omnetpp | 260 | 24.0 | <u>260</u> | <u>24.1</u> | 260 | 24.1 | 228 | 27.4 | <u>228</u> | <u>27.4</u> | 229 | 27.3 |
| 473.astar | 286 | 24.6 | 287 | 24.5 | <u>286</u> | <u>24.5</u> | 286 | 24.6 | 287 | 24.5 | <u>286</u> | <u>24.5</u> |
| 483.xalancbmk | 175 | 39.4 | 176 | 39.1 | <u>175</u> | <u>39.4</u> | 175 | 39.4 | 176 | 39.1 | <u>175</u> | <u>39.4</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.
Intel HT technology Disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5
OMP_NUM_THREADS set to number of cores

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 42.9

Huawei RH2285, Intel Xeon X5670

SPECint_base2006 = 40.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|--|---------------------------|-------------|
| Huawei | SPECint2006 = | 42.9 |
| Huawei RH2285, Intel Xeon X5670 | SPECint_base2006 = | 40.7 |

| | |
|------------------------------|--|
| CPU2006 license: 3175 | Test date: Sep-2011 |
| Test sponsor: Huawei | Hardware Availability: May-2011 |
| Tested by: Huawei | Software Availability: Jan-2011 |

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|---------------------------------------|---------------------------|-------------|
| Huawei | SPECint2006 = | 42.9 |
| Huawei RH2285,Intel Xeon X5670 | SPECint_base2006 = | 40.7 |

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
 -L/smartheap -lsmartheap
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | | |
|---------------------------------|--------------------|------|
| Huawei | SPECint2006 = | 42.9 |
| Huawei RH2285, Intel Xeon X5670 | SPECint_base2006 = | 40.7 |

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
 For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
 Report generated on Thu Jul 24 01:44:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
 Originally published on 25 October 2011.