



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3


Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

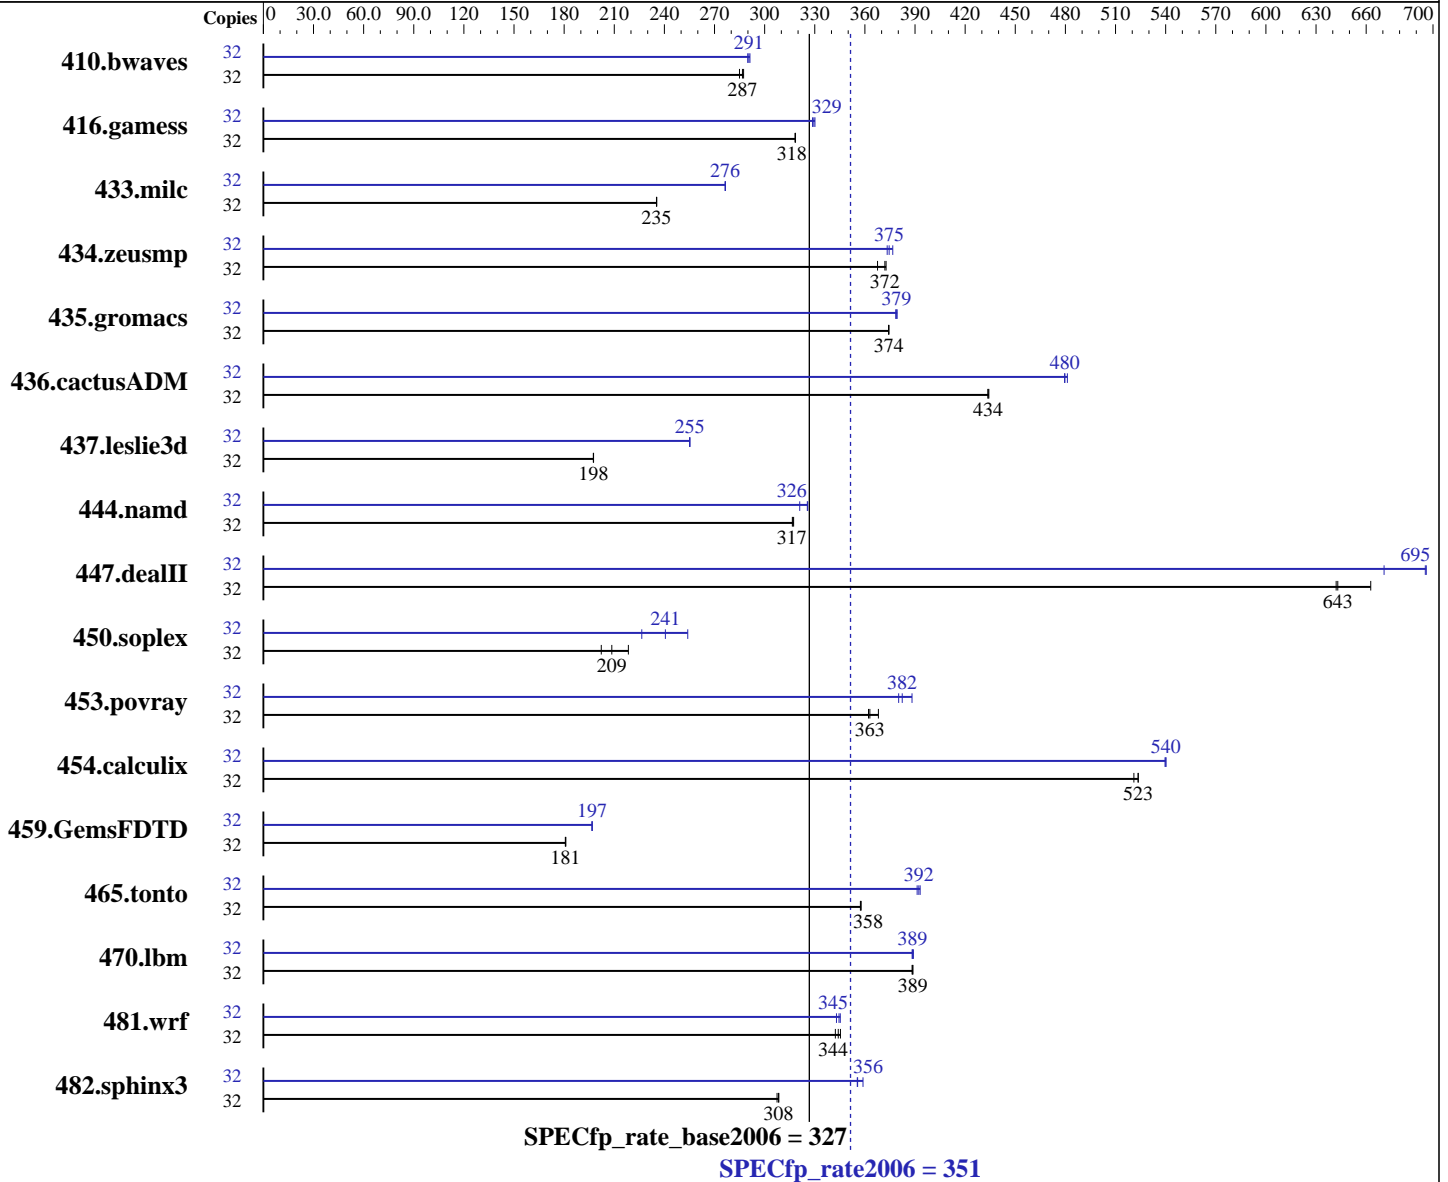

Hardware

CPU Name: AMD Opteron 6276
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = **351**

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = **327**

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)

Disk Subsystem: 1 x 120 GB 5.4 K SATA

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1526	285	<u>1517</u>	<u>287</u>	1513	287	32	1493	291	1500	290	<u>1497</u>	<u>291</u>
416.gamess	32	1968	318	1967	318	1969	318	32	1906	329	1898	330	1902	329
433.milc	32	1249	235	1248	235	1249	235	32	1063	276	1063	276	1062	277
434.zeusmp	32	792	368	783	372	781	373	32	778	375	780	373	773	377
435.gromacs	32	611	374	610	374	610	374	32	604	378	602	379	603	379
436.cactusADM	32	882	434	881	434	882	434	32	797	480	795	481	797	480
437.leslie3d	32	1523	198	1522	198	1523	198	32	1179	255	1178	255	1179	255
444.namd	32	811	317	810	317	809	317	32	788	326	800	321	788	326
447.dealII	32	570	642	569	643	552	663	32	526	695	546	671	526	696
450.soplex	32	1320	202	1280	209	1222	218	32	1109	241	1178	226	1051	254
453.povray	32	470	362	469	363	463	368	32	448	380	445	382	439	388
454.calculix	32	507	521	504	524	504	523	32	489	540	489	540	489	540
459.GemsFDTD	32	1879	181	1877	181	1876	181	32	1726	197	1725	197	1725	197
465.tonto	32	880	358	881	358	881	357	32	801	393	805	391	803	392
470.lbm	32	1131	389	1133	388	1131	389	32	1132	389	1130	389	1132	388
481.wrf	32	1039	344	1044	342	1035	345	32	1038	345	1035	345	1042	343
482.sphinx3	32	2023	308	2022	308	2029	307	32	1755	355	1754	356	1738	359

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Operating System Notes (Continued)

Set "kernel/randomize_va_space=0" in /etc/sysctl.conf

Set vm/nr_hugepages=28672 in /etc/sysctl.conf

Set "nodev /mnt/hugepages hugetlbfs defaults 0 0" in /etc/fstab

Platform Notes

BIOS configuration:

Power Efficiency Mode set to Performance

1 GB PCI Memory Gap set to Disabled

Memory Clock Speed set to 1333MHz

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bd=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 351

ProLiant DL165 G7
(2.3 GHz AMD Opteron 6276)

SPECfp_rate_base2006 = 327

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:54:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2011.