



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®\_rate2006 = 323

Servidor Itaotec MX203+ (Intel Xeon E5645)

SPECint\_rate\_base2006 = 305

CPU2006 license: 9001


Test date: Nov-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Aug-2011

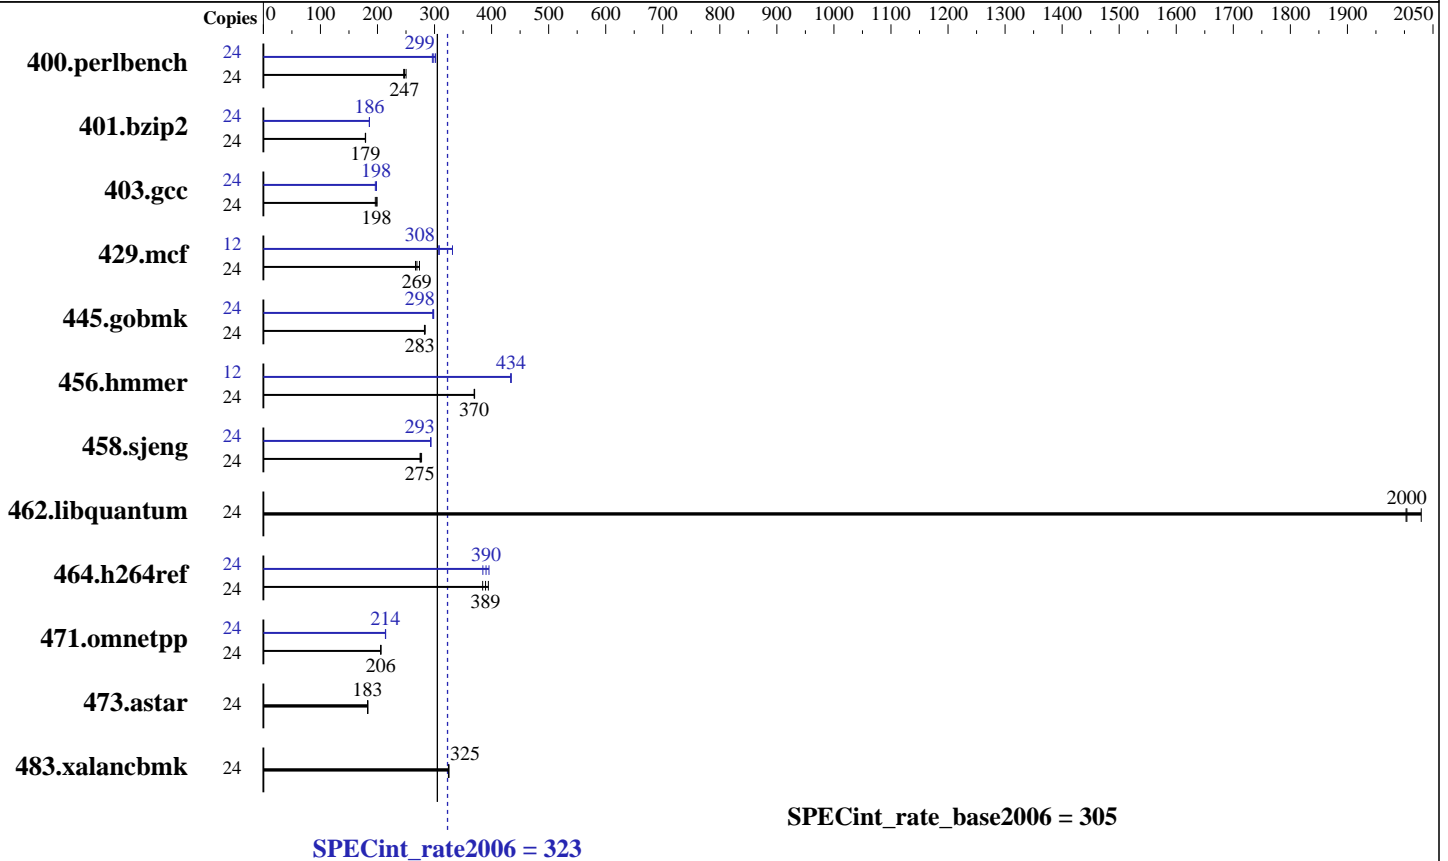

## Hardware

CPU Name: Intel Xeon E5645  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20110811  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 323

Servidor Itautec MX203+ (Intel Xeon E5645)

SPECint\_rate\_base2006 = 305

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Nov-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	938	250	953	246	<b>948</b>	<b>247</b>	24	777	302	792	296	<b>785</b>	<b>299</b>		
401.bzip2	24	1292	179	1295	179	<b>1295</b>	<b>179</b>	24	1246	186	<b>1246</b>	<b>186</b>	1247	186		
403.gcc	24	<b>976</b>	<b>198</b>	969	199	985	196	24	<b>977</b>	<b>198</b>	975	198	985	196		
429.mcf	24	800	274	<b>813</b>	<b>269</b>	821	267	12	<b>355</b>	<b>308</b>	356	307	330	331		
445.gobmk	24	892	282	<b>890</b>	<b>283</b>	888	284	24	<b>844</b>	<b>298</b>	843	299	848	297		
456.hammer	24	605	370	<b>606</b>	<b>370</b>	606	370	12	258	434	258	434	<b>258</b>	<b>434</b>		
458.sjeng	24	1057	275	<b>1055</b>	<b>275</b>	1047	277	24	<b>990</b>	<b>293</b>	989	294	991	293		
462.libquantum	24	245	2030	<b>248</b>	<b>2000</b>	248	2000	24	245	2030	<b>248</b>	<b>2000</b>	248	2000		
464.h264ref	24	1347	394	<b>1364</b>	<b>389</b>	1382	384	24	1343	395	<b>1361</b>	<b>390</b>	1381	385		
471.omnetpp	24	729	206	<b>729</b>	<b>206</b>	729	206	24	<b>700</b>	<b>214</b>	701	214	700	214		
473.astar	24	920	183	923	183	<b>922</b>	<b>183</b>	24	920	183	923	183	<b>922</b>	<b>183</b>		
483.xalancbmk	24	509	325	<b>510</b>	<b>325</b>	511	324	24	509	325	<b>510</b>	<b>325</b>	511	324		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.

## General Notes

This result was measured on the Servidor Itautec MX224.  
The Servidor Itautec MX203+, Servidor Itautec MX223+ and the Servidor Itautec MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 323

Servidor Itaotec MX203+ (Intel Xeon E5645)

SPECint\_rate\_base2006 = 305

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Nov-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 323

Servidor Itaotec MX203+ (Intel Xeon E5645)

SPECint\_rate\_base2006 = 305

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Nov-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 323

Servidor Itaotec MX203+ (Intel Xeon E5645)

SPECint\_rate\_base2006 = 305

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Nov-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

471.omnetpp (continued):  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>  
<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 00:48:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 December 2011.