



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**SPECfp®\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2012

**Hardware Availability:** May-2011

**Software Availability:** Oct-2011

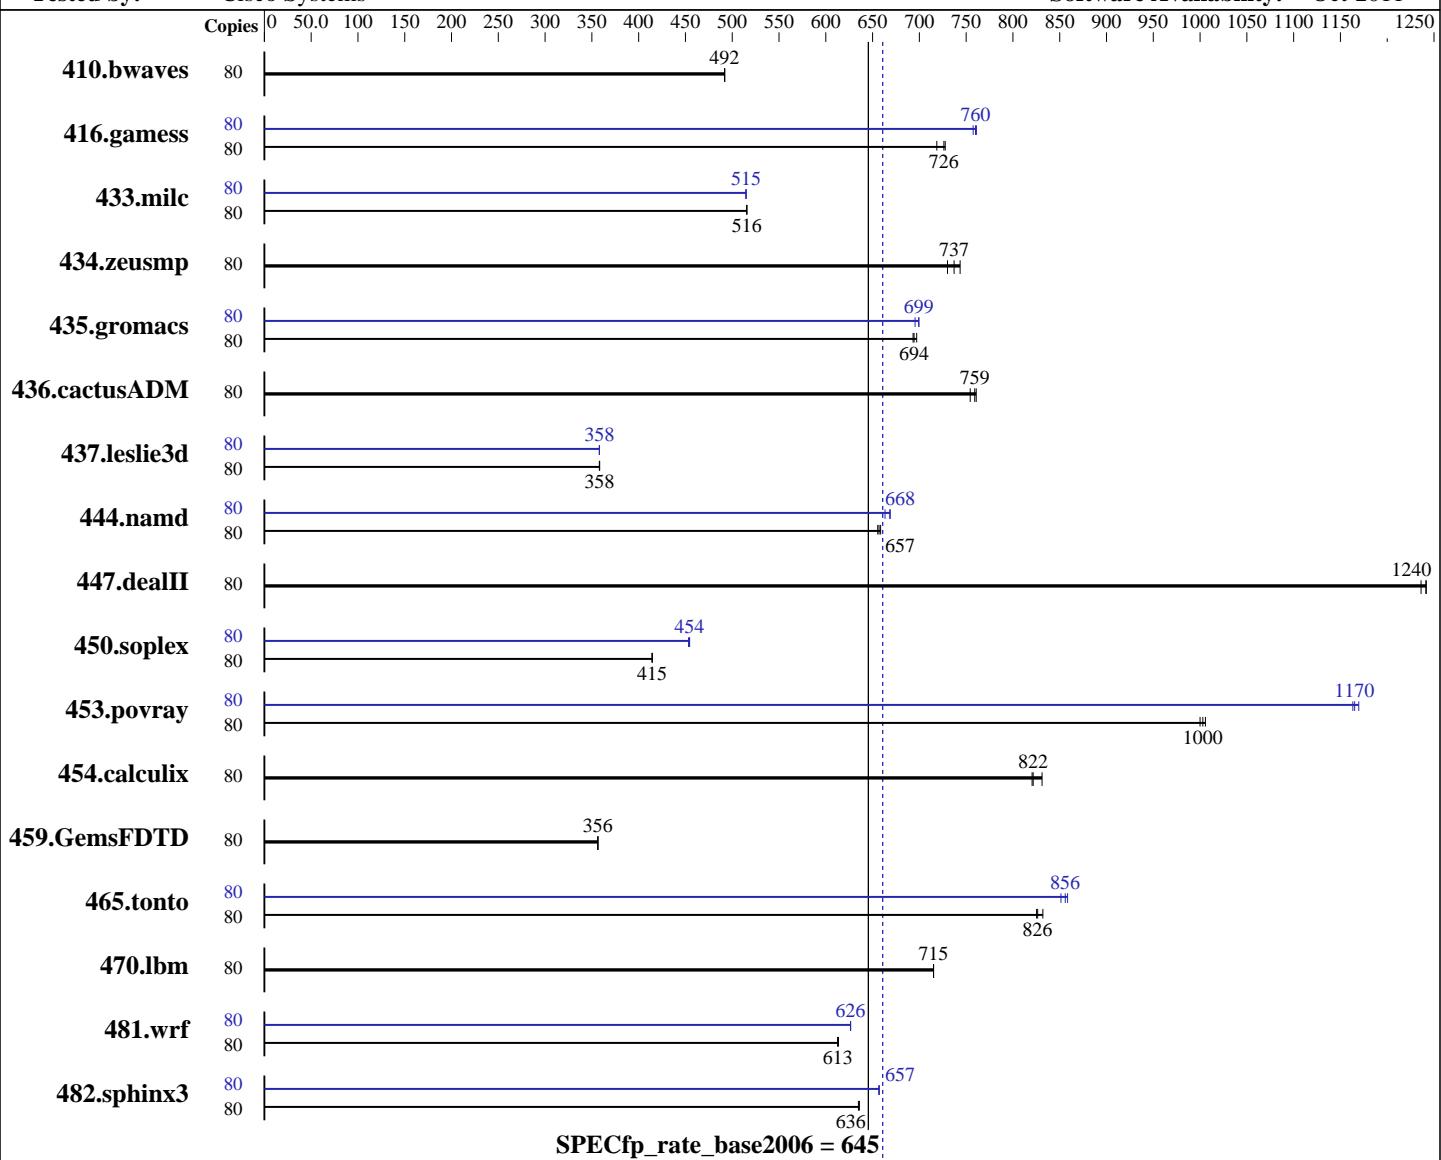

**SPECfp\_rate\_base2006 = 645**

**SPECfp\_rate2006 = 661**

### Hardware

CPU Name: Intel Xeon E7-8867L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 Compiler: 2.6.32-131.0.15.el6.x86\_64  
 Auto Parallel: C/C++/Fortran: Version 12.1.0.225 of Intel Studio  
 File System: XE for Linux  
 System State: No  
 Base Pointers: ext4  
 Run level 3 (multi-user)  
 32/64-bit

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**CPU2006 license:** 9019

**Test date:** Jan-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** May-2011

**Tested by:** Cisco Systems

**Software Availability:** Oct-2011

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 4Rx4 PC3-8500R-9, ECC, running at 800 MHz)  
 Disk Subsystem: 1 X 600 GB SAS 10K RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	<u>2210</u>	<u>492</u>	2210	492	2210	492	80	<u>2210</u>	<u>492</u>	2210	492	2210	492
416.gamess	80	<u>2157</u>	<u>726</u>	2153	728	2180	719	80	<u>2058</u>	<u>761</u>	2068	758	<u>2061</u>	<u>760</u>
433.milc	80	<u>1425</u>	<u>516</u>	1424	516	1425	515	80	<u>1426</u>	<u>515</u>	1427	515	<u>1427</u>	<u>515</u>
434.zeusmp	80	<u>988</u>	<u>737</u>	979	744	997	730	80	<u>988</u>	<u>737</u>	979	744	997	730
435.gromacs	80	824	693	819	697	<u>823</u>	<u>694</u>	80	<u>817</u>	<u>699</u>	821	695	817	700
436.cactusADM	80	1267	754	1257	761	<u>1259</u>	<u>759</u>	80	<u>1267</u>	<u>754</u>	1257	761	<u>1259</u>	<u>759</u>
437.leslie3d	80	2099	358	<u>2099</u>	<u>358</u>	2101	358	80	<u>2100</u>	<u>358</u>	<u>2100</u>	<u>358</u>	2101	358
444.namd	80	979	656	974	659	<u>977</u>	<u>657</u>	80	<u>959</u>	<u>669</u>	<u>960</u>	<u>668</u>	967	663
447.dealII	80	740	1240	737	1240	<u>737</u>	<u>1240</u>	80	<u>740</u>	<u>1240</u>	737	1240	<u>737</u>	<u>1240</u>
450.soplex	80	1609	415	1611	414	<u>1609</u>	<u>415</u>	80	<u>1469</u>	<u>454</u>	1468	454	1472	453
453.povray	80	423	1010	<u>424</u>	<u>1000</u>	426	1000	80	<u>364</u>	<u>1170</u>	366	1160	<u>365</u>	<u>1170</u>
454.calculix	80	794	831	804	820	<u>803</u>	<u>822</u>	80	<u>794</u>	<u>831</u>	804	820	<u>803</u>	<u>822</u>
459.GemsFDTD	80	2382	356	<u>2381</u>	<u>356</u>	2381	356	80	<u>2382</u>	<u>356</u>	<u>2381</u>	<u>356</u>	2381	356
465.tonto	80	954	825	<u>953</u>	<u>826</u>	946	832	80	<u>917</u>	<u>858</u>	<u>920</u>	<u>856</u>	925	851
470.lbm	80	1537	715	<u>1537</u>	<u>715</u>	1537	715	80	<u>1537</u>	<u>715</u>	<u>1537</u>	<u>715</u>	1537	715
481.wrf	80	1459	613	<u>1458</u>	<u>613</u>	1456	614	80	<u>1427</u>	<u>626</u>	1427	626	1426	627
482.sphinx3	80	2456	635	<u>2453</u>	<u>636</u>	2453	636	80	<u>2374</u>	<u>657</u>	2374	657	2373	657

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /opt/cpu2006/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on localhost.localdomain Fri Jan 27 23:20:12 2012  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**CPU2006 license:** 9019

**Test date:** Jan-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** May-2011

**Tested by:** Cisco Systems

**Software Availability:** Oct-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-L8867 @ 2.13GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 8 9 16 17 18 24 25
    physical 1: cores 0 1 2 8 9 16 17 18 24 25
    physical 2: cores 0 1 2 8 9 16 17 18 24 25
    physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:       1058715304 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 27 23:14
```

```
SPEC is set to: /opt/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  550G   66G  456G  13%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**Test date:** Jan-2012

**Hardware Availability:** May-2011

**Software Availability:** Oct-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**Test date:** Jan-2012

**Hardware Availability:** May-2011

**Software Availability:** Oct-2011

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2012

**Hardware Availability:** May-2011

**Software Availability:** Oct-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C460 M2 (Intel Xeon E7-8867L, 2.13 GHz)

**SPECfp\_rate2006 = 661**

**SPECfp\_rate\_base2006 = 645**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2012

**Hardware Availability:** May-2011

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
           -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

```
481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:48:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 March 2012.