



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp®\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

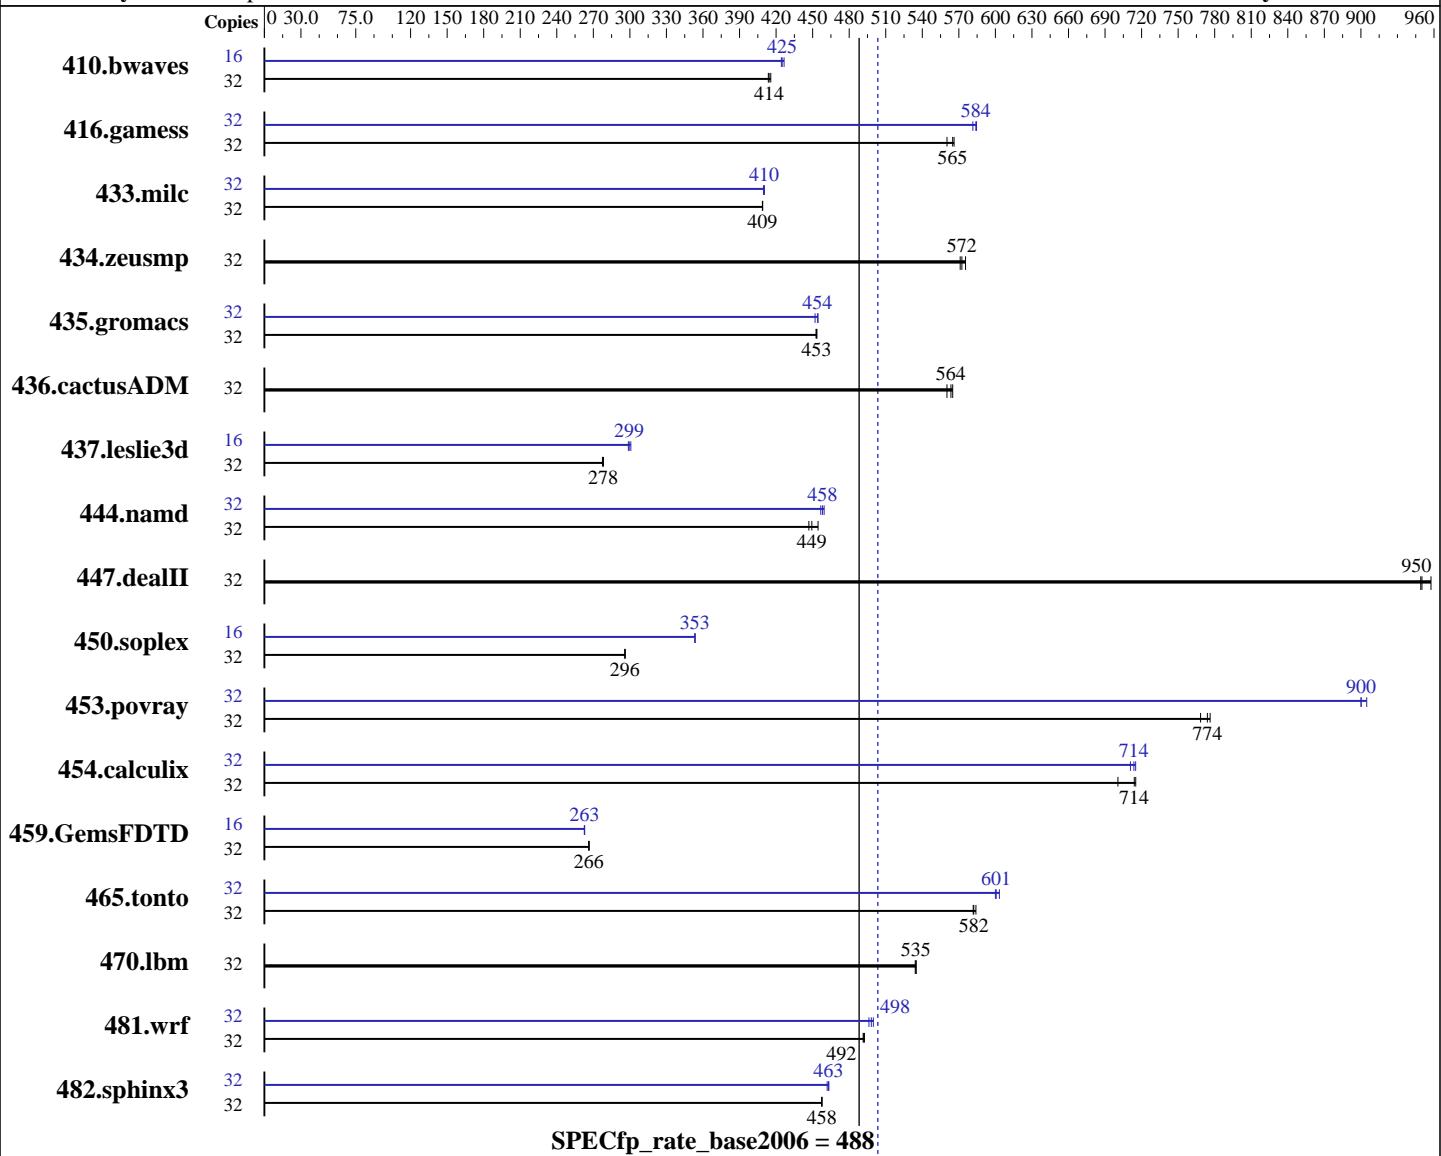

### Hardware

CPU Name: Intel Xeon E5-2690  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 2900  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1046	416	<b>1050</b>	<b>414</b>	1051	414	16	512	424	510	427	<b>512</b>	<b>425</b>
416.gamess	32	1118	560	<b>1109</b>	<b>565</b>	1107	566	32	1077	582	<b>1073</b>	<b>584</b>	1072	584
433.milc	32	718	409	<b>718</b>	<b>409</b>	719	409	32	716	410	717	410	<b>716</b>	<b>410</b>
434.zeusmp	32	506	575	<b>509</b>	<b>572</b>	510	571	32	506	575	<b>509</b>	<b>572</b>	510	571
435.gromacs	32	505	453	504	453	<b>504</b>	<b>453</b>	32	505	452	503	454	<b>503</b>	<b>454</b>
436.cactusADM	32	<b>679</b>	<b>564</b>	677	565	683	560	32	<b>679</b>	<b>564</b>	677	565	683	560
437.leslie3d	32	1081	278	<b>1082</b>	<b>278</b>	1084	277	16	<b>502</b>	<b>299</b>	500	301	503	299
444.namd	32	565	454	574	447	<b>571</b>	<b>449</b>	32	<b>560</b>	<b>458</b>	559	459	562	457
447.dealII	32	386	949	382	958	<b>385</b>	<b>950</b>	32	386	949	382	958	<b>385</b>	<b>950</b>
450.soplex	32	901	296	902	296	<b>902</b>	<b>296</b>	16	<b>378</b>	<b>353</b>	378	353	377	354
453.povray	32	219	776	222	768	<b>220</b>	<b>774</b>	32	<b>189</b>	<b>900</b>	188	905	189	900
454.calculix	32	369	715	<b>370</b>	<b>714</b>	377	701	32	<b>370</b>	<b>714</b>	371	711	369	715
459.GemsFDTD	32	1274	267	<b>1274</b>	<b>266</b>	1275	266	16	646	263	646	263	<b>646</b>	<b>263</b>
465.tonto	32	<b>541</b>	<b>582</b>	539	584	541	582	32	522	603	525	600	<b>524</b>	<b>601</b>
470.lbm	32	822	535	<b>822</b>	<b>535</b>	823	534	32	822	535	<b>822</b>	<b>535</b>	823	534
481.wrf	32	726	493	727	491	<b>727</b>	<b>492</b>	32	715	500	<b>717</b>	<b>498</b>	720	496
482.sphinx3	32	<b>1363</b>	<b>458</b>	1364	457	1363	458	32	<b>1346</b>	<b>463</b>	1350	462	<b>1347</b>	<b>463</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
 LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2690)

**SPECfp\_rate2006 = 504**

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:44:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 March 2012.