



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp®2006 = 82.0**

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

**SPECfp\_base2006 = 78.4**

CPU2006 license: 19


Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

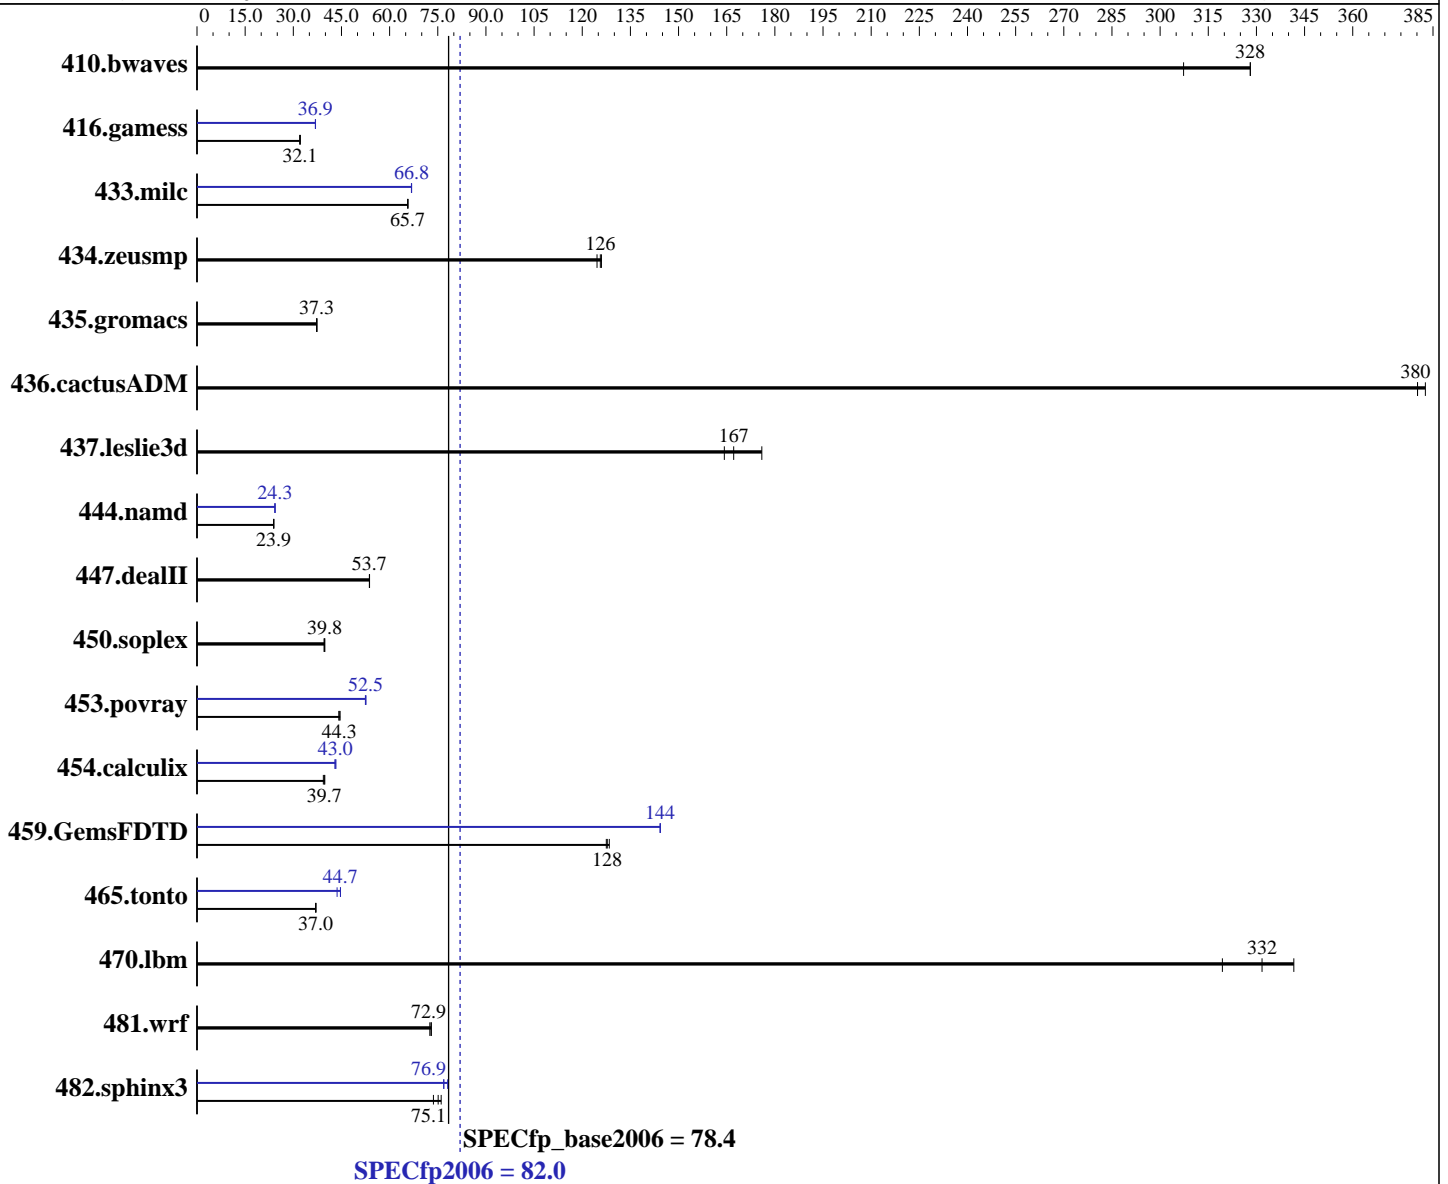

### Hardware

CPU Name: Intel Xeon E5-2643  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **82.0**

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

SPECfp\_base2006 = **78.4**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	44.2	307	<b>41.4</b>	<b>328</b>	41.4	328	44.2	307	<b>41.4</b>	<b>328</b>	41.4	328
416.gamess	612	32.0	<b>610</b>	<b>32.1</b>	608	32.2	<b>531</b>	<b>36.9</b>	530	36.9	531	36.9
433.milc	140	65.7	<b>140</b>	<b>65.7</b>	140	65.7	137	66.8	<b>137</b>	<b>66.8</b>	137	66.8
434.zeusmp	73.0	125	<b>72.4</b>	<b>126</b>	72.2	126	73.0	125	<b>72.4</b>	<b>126</b>	72.2	126
435.gromacs	<b>191</b>	<b>37.3</b>	191	37.4	192	37.2	<b>191</b>	<b>37.3</b>	191	37.4	192	37.2
436.cactusADM	31.4	380	31.2	383	<b>31.4</b>	<b>380</b>	31.4	380	31.2	383	<b>31.4</b>	<b>380</b>
437.leslie3d	<b>56.2</b>	<b>167</b>	53.4	176	57.2	164	<b>56.2</b>	<b>167</b>	53.4	176	57.2	164
444.namd	335	23.9	<b>335</b>	<b>23.9</b>	336	23.9	330	24.3	330	24.3	<b>330</b>	<b>24.3</b>
447.dealII	<b>213</b>	<b>53.7</b>	213	53.7	213	53.7	<b>213</b>	<b>53.7</b>	213	53.7	213	53.7
450.soplex	211	39.6	<b>210</b>	<b>39.8</b>	210	39.8	211	39.6	<b>210</b>	<b>39.8</b>	210	39.8
453.povray	119	44.6	<b>120</b>	<b>44.3</b>	120	44.2	101	52.6	<b>101</b>	<b>52.5</b>	101	52.5
454.calculix	207	39.8	<b>208</b>	<b>39.7</b>	210	39.4	<b>192</b>	<b>43.0</b>	191	43.3	192	43.0
459.GemsFDTD	82.6	128	83.2	127	<b>83.0</b>	<b>128</b>	73.5	144	<b>73.5</b>	<b>144</b>	73.5	144
465.tonto	<b>266</b>	<b>37.0</b>	266	37.1	266	37.0	<b>220</b>	<b>44.7</b>	220	44.7	225	43.6
470.lbm	<b>41.4</b>	<b>332</b>	40.2	342	43.0	319	<b>41.4</b>	<b>332</b>	40.2	342	43.0	319
481.wrf	154	72.5	153	73.0	<b>153</b>	<b>72.9</b>	154	72.5	153	73.0	<b>153</b>	<b>72.9</b>
482.sphinx3	265	73.6	256	76.1	<b>259</b>	<b>75.1</b>	250	78.1	<b>253</b>	<b>76.9</b>	254	76.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Intel HT Technology = Disable  
Frequency Floor Override = Enable

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 82.0**

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

**SPECfp\_base2006 = 78.4**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 82.0**

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

**SPECfp\_base2006 = 78.4**

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 82.0**

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

**SPECfp\_base2006 = 78.4**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 82.0

PRIMERGY RX300 S7, Intel Xeon E5-2643, 3.30 GHz

SPECfp\_base2006 = 78.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:35:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 April 2012.