



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp®\_rate2006 = 316

ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)

SPECfp\_rate\_base2006 = 310

CPU2006 license: 9008


Test date: Apr-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Oct-2011

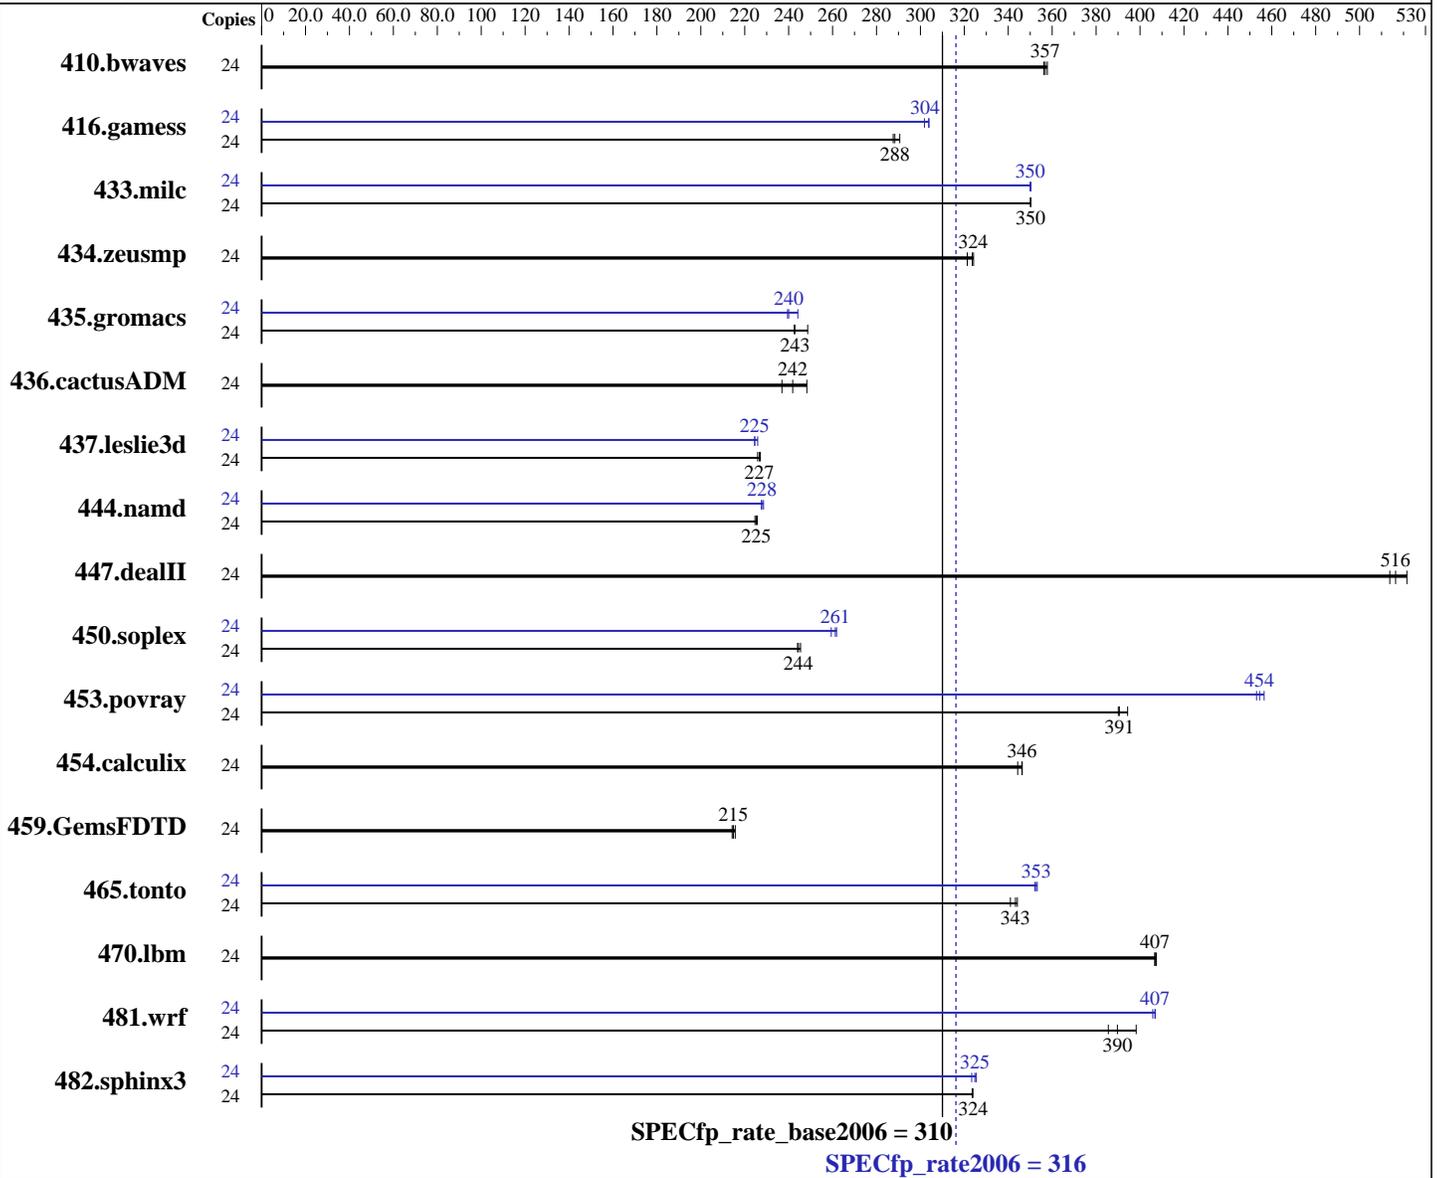

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 2 TB 7200 RPM SATA  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	912	358	<b>914</b>	<b>357</b>	916	356	24	912	358	<b>914</b>	<b>357</b>	916	356
416.gamess	24	<b>1630</b>	<b>288</b>	1617	291	1634	288	24	1557	302	<b>1547</b>	<b>304</b>	1546	304
433.milc	24	<b>629</b>	<b>350</b>	629	350	629	350	24	<b>629</b>	<b>350</b>	629	350	629	350
434.zeusmp	24	674	324	<b>675</b>	<b>324</b>	680	321	24	674	324	<b>675</b>	<b>324</b>	680	321
435.gromacs	24	689	249	<b>706</b>	<b>243</b>	706	243	24	702	244	<b>714</b>	<b>240</b>	715	239
436.cactusADM	24	1210	237	1155	248	<b>1186</b>	<b>242</b>	24	1210	237	1155	248	<b>1186</b>	<b>242</b>
437.leslie3d	24	993	227	999	226	<b>995</b>	<b>227</b>	24	1005	225	999	226	<b>1005</b>	<b>225</b>
444.namd	24	<b>855</b>	<b>225</b>	853	226	857	225	24	<b>845</b>	<b>228</b>	846	228	842	229
447.dealII	24	534	514	526	522	<b>532</b>	<b>516</b>	24	534	514	526	522	<b>532</b>	<b>516</b>
450.soplex	24	820	244	816	245	<b>819</b>	<b>244</b>	24	764	262	<b>766</b>	<b>261</b>	772	259
453.povray	24	327	390	324	394	<b>327</b>	<b>391</b>	24	282	453	<b>281</b>	<b>454</b>	280	457
454.calculix	24	575	344	572	346	<b>572</b>	<b>346</b>	24	575	344	572	346	<b>572</b>	<b>346</b>
459.GemsFDTD	24	1181	216	1188	214	<b>1185</b>	<b>215</b>	24	1181	216	1188	214	<b>1185</b>	<b>215</b>
465.tonto	24	686	344	693	341	<b>688</b>	<b>343</b>	24	669	353	<b>669</b>	<b>353</b>	671	352
470.lbm	24	811	407	<b>810</b>	<b>407</b>	809	407	24	811	407	<b>810</b>	<b>407</b>	809	407
481.wrf	24	673	398	<b>688</b>	<b>390</b>	695	386	24	<b>659</b>	<b>407</b>	659	407	661	406
482.sphinx3	24	<b>1445</b>	<b>324</b>	1444	324	1446	324	24	1438	325	<b>1440</b>	<b>325</b>	1447	323

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-kw54 Fri Apr 13 22:53:09 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 6
  siblings     : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  cache size   : 15360 KB

```

```

From /proc/meminfo
MemTotal:      132117020 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

```

uname -a:
Linux linux-kw54 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 13 08:19 last=S

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  1.8T   29G  1.8T   2% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
 Transparent Huge Pages disabled with:  
 echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
 Filesystem page cache cleared with:  
 echo 1> /proc/sys/vm/drop\_caches  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 316**

**ACTINA SOLAR 220 X5 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 310**

**CPU2006 license:** 9008

**Test date:** Apr-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 06:04:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.