



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp®2006 = 65.4**

**SPECfp\_base2006 = 62.2**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

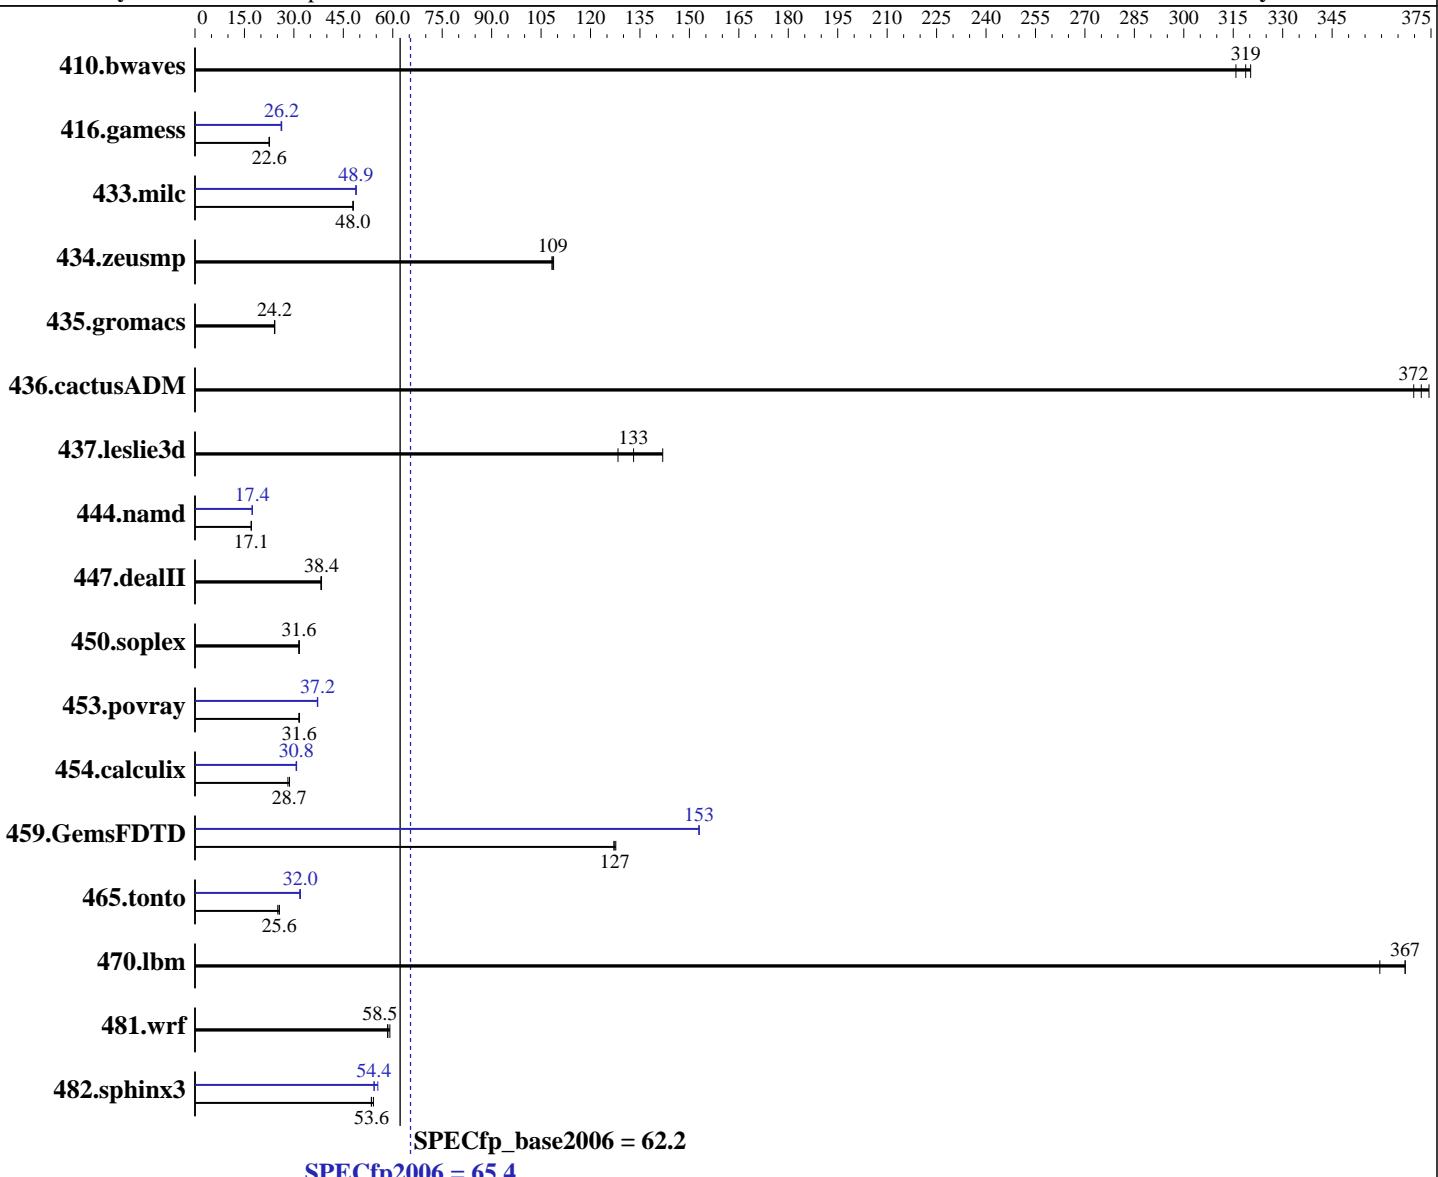

### Hardware

CPU Name: Intel Xeon E5-2620  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	<b>42.6</b>	<b>319</b>	43.0	316	42.4	320	<b>42.6</b>	<b>319</b>	43.0	316	42.4	320
416.gamess	868	22.6	<b>868</b>	<b>22.6</b>	870	22.5	<b>750</b>	<b>26.1</b>	<b>746</b>	<b>26.2</b>	744	26.3
433.milc	191	48.0	<b>191</b>	<b>48.0</b>	191	48.0	188	48.9	188	48.8	<b>188</b>	<b>48.9</b>
434.zeusmp	84.0	108	<b>83.8</b>	<b>109</b>	83.6	109	84.0	108	<b>83.8</b>	<b>109</b>	83.6	109
435.gromacs	295	24.2	<b>295</b>	<b>24.2</b>	296	24.1	<b>295</b>	<b>24.2</b>	<b>295</b>	<b>24.2</b>	296	24.1
436.cactusADM	<b>32.1</b>	<b>372</b>	32.3	370	31.9	374	<b>32.1</b>	<b>372</b>	32.3	370	31.9	374
437.leslie3d	<b>70.6</b>	<b>133</b>	66.2	142	73.2	128	<b>70.6</b>	<b>133</b>	66.2	142	73.2	128
444.namd	<b>469</b>	<b>17.1</b>	470	17.1	469	17.1	<b>462</b>	<b>17.4</b>	461	17.4	<b>462</b>	<b>17.4</b>
447.dealII	300	38.2	<b>298</b>	<b>38.4</b>	298	38.4	300	38.2	<b>298</b>	<b>38.4</b>	298	38.4
450.soplex	264	31.5	264	31.6	<b>264</b>	<b>31.6</b>	264	31.5	264	31.6	<b>264</b>	<b>31.6</b>
453.povray	169	31.5	<b>168</b>	<b>31.6</b>	168	31.7	<b>143</b>	<b>37.2</b>	143	37.2	143	37.1
454.calculix	288	28.7	<b>288</b>	<b>28.7</b>	293	28.2	<b>269</b>	<b>30.7</b>	268	30.8	<b>268</b>	<b>30.8</b>
459.GemsFDTD	83.5	127	83.1	128	<b>83.3</b>	<b>127</b>	<b>69.4</b>	<b>153</b>	69.4	153	69.4	153
465.tonto	392	25.1	<b>385</b>	<b>25.6</b>	385	25.6	<b>308</b>	<b>32.0</b>	310	31.8	308	32.0
470.lbm	37.4	367	<b>37.4</b>	<b>367</b>	38.2	359	<b>37.4</b>	<b>367</b>	<b>37.4</b>	<b>367</b>	38.2	359
481.wrf	189	59.1	<b>191</b>	<b>58.5</b>	191	58.4	<b>189</b>	<b>59.1</b>	<b>191</b>	<b>58.5</b>	191	58.4
482.sphinx3	<b>364</b>	<b>53.6</b>	360	54.1	364	53.5	<b>359</b>	<b>54.4</b>	<b>359</b>	<b>54.3</b>	351	55.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on blacktip-pete Thu Apr 26 13:56:13 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Genuine Intel(R) CPU @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132137164 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux blacktip-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 24 15:50
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_blacktippete-lv_root
                ext4   265G   96G  156G  38%  /
```

Additional information from dmidecode:

```
Memory:
4x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"  
OMP\_NUM\_THREADS = "12"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2620, 2.00 GHz)

**SPECfp2006 = 65.4**

**SPECfp\_base2006 = 62.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:05:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.