



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 57.6

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp_base2006 = 55.9

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Apr-2011

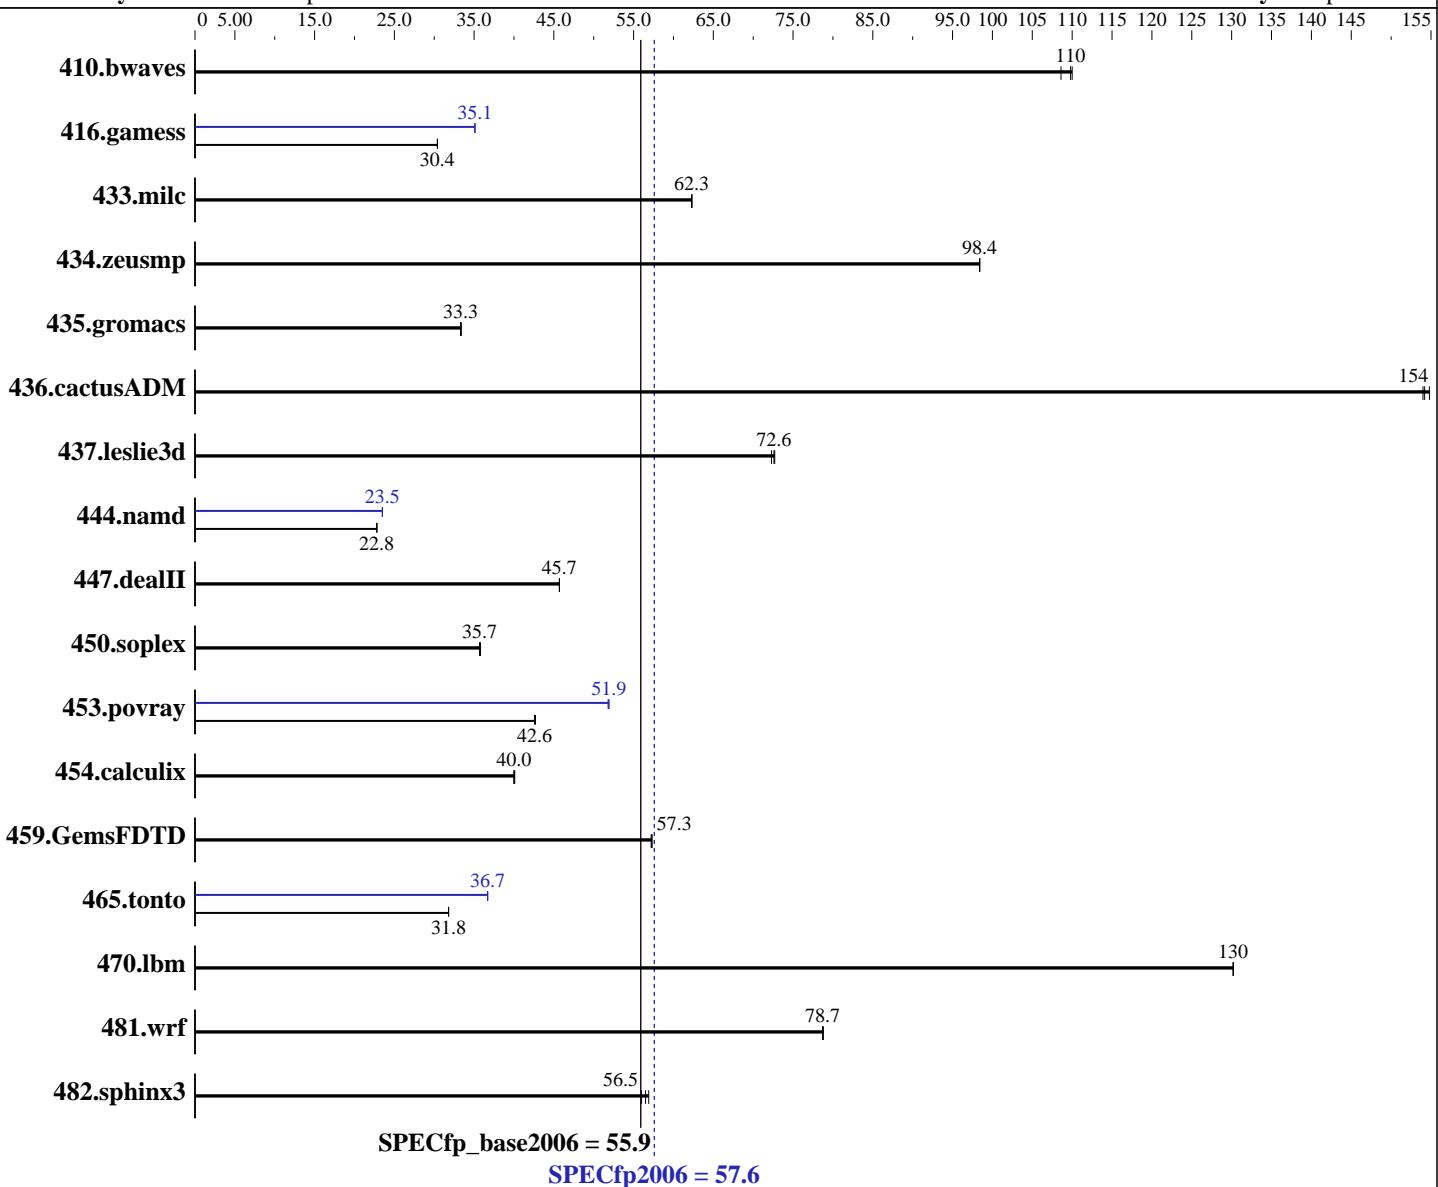

SPECfp_base2006 = 55.9

SPECfp2006 = 57.6

Hardware

CPU Name: Intel Core i5-3570T
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Microsoft Windows 7 Ultimate (64-bit)
Compiler: 6.1.7601 Service Pack 1 Build 7601
C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows;
Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows;
Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel: Yes
File System: NTFS

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp2006 = 57.6

SPECfp_base2006 = 55.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Apr-2011

L3 Cache:	6 MB I+D on chip per chip	System State:	Default
Other Cache:	None	Base Pointers:	32/64-bit
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 TB Seagate SATA, 7200 RPM	Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	125	109	124	110	124	110	125	109	124	110	124	110
416.gamess	645	30.4	645	30.4	645	30.4	557	35.1	557	35.1	557	35.1
433.milc	147	62.3	147	62.3	147	62.3	147	62.3	147	62.3	147	62.3
434.zeusmp	92.5	98.4	92.5	98.4	92.5	98.4	92.5	98.4	92.5	98.4	92.5	98.4
435.gromacs	214	33.4	214	33.3	214	33.3	214	33.4	214	33.3	214	33.3
436.cactusADM	77.5	154	77.2	155	77.6	154	77.5	154	77.2	155	77.6	154
437.leslie3d	129	72.6	129	72.7	130	72.3	129	72.6	129	72.7	130	72.3
444.namd	352	22.8	352	22.8	352	22.8	341	23.5	341	23.5	341	23.5
447.dealII	250	45.7	250	45.7	251	45.7	250	45.7	250	45.7	251	45.7
450.soplex	233	35.8	233	35.7	234	35.7	233	35.8	233	35.7	234	35.7
453.povray	125	42.7	125	42.6	125	42.6	103	51.9	103	51.9	103	51.8
454.calculix	206	40.0	206	40.1	206	40.0	206	40.0	206	40.1	206	40.0
459.GemsFDTD	186	57.2	185	57.3	185	57.3	186	57.2	185	57.3	185	57.3
465.tonto	309	31.8	309	31.8	310	31.8	268	36.7	268	36.7	268	36.7
470.lbm	106	130	106	130	106	130	106	130	106	130	106	130
481.wrf	142	78.8	142	78.7	142	78.7	142	78.8	142	78.7	142	78.7
482.sphinx3	345	56.5	343	56.9	348	56.0	345	56.5	343	56.9	348	56.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2008" (shortcut provided in the Intel(r) Parallel Studio XE 2011 program folder)

Platform Notes

```
Sysinfo program C:\CPU200~1.17A\Docs\sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clte840F20A9F08 Tue May 15 21:56:55 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp2006 = 57.6

SPECfp_base2006 = 55.9

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Platform Notes (Continued)

```
OS Name      : Microsoft Windows 7 Ultimate
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DH77KC_
Processor(s) : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~2301 Mhz
BIOS Version  : Intel Corp. KCH7710H.86A.0069.2012.0224.1825, 2/24/2012
Total Physical Memory: 8,090 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 1024
L3CacheSize  : 6144
MaxClockSpeed: 2301
Name         : Intel(R) Core(TM) i5-3570T CPU @ 2.30GHz
NumberOfCores: 4
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc9 -Qstd=c99 ifort
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp2006 = 57.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

SPECfp_base2006 = 55.9

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
    433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
    444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
    465.tonto: -DSPEC_CPU_P64
    470.lbm: -DSPEC_CPU_P64
    481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000
```

C++ benchmarks:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
    -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000
```

Benchmarks using both Fortran and C:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp2006 = 57.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo  
          -O3 -Qprec-div- -Oa -Qauto-ilp32 /F10000000000 shlw64M.lib  
          -link /FORCE:MULTIPLE
```

447.deallII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo  
           -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32  
           /F10000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo  
            -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-  
            /F10000000000
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH77KC motherboard (Intel Core i5-3570T)

SPECfp2006 = 57.6

SPECfp_base2006 = 55.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo  
          -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc  
          /F1000000000
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:24:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 July 2012.