



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 64.1**

IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp\_base2006 = 62.4**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

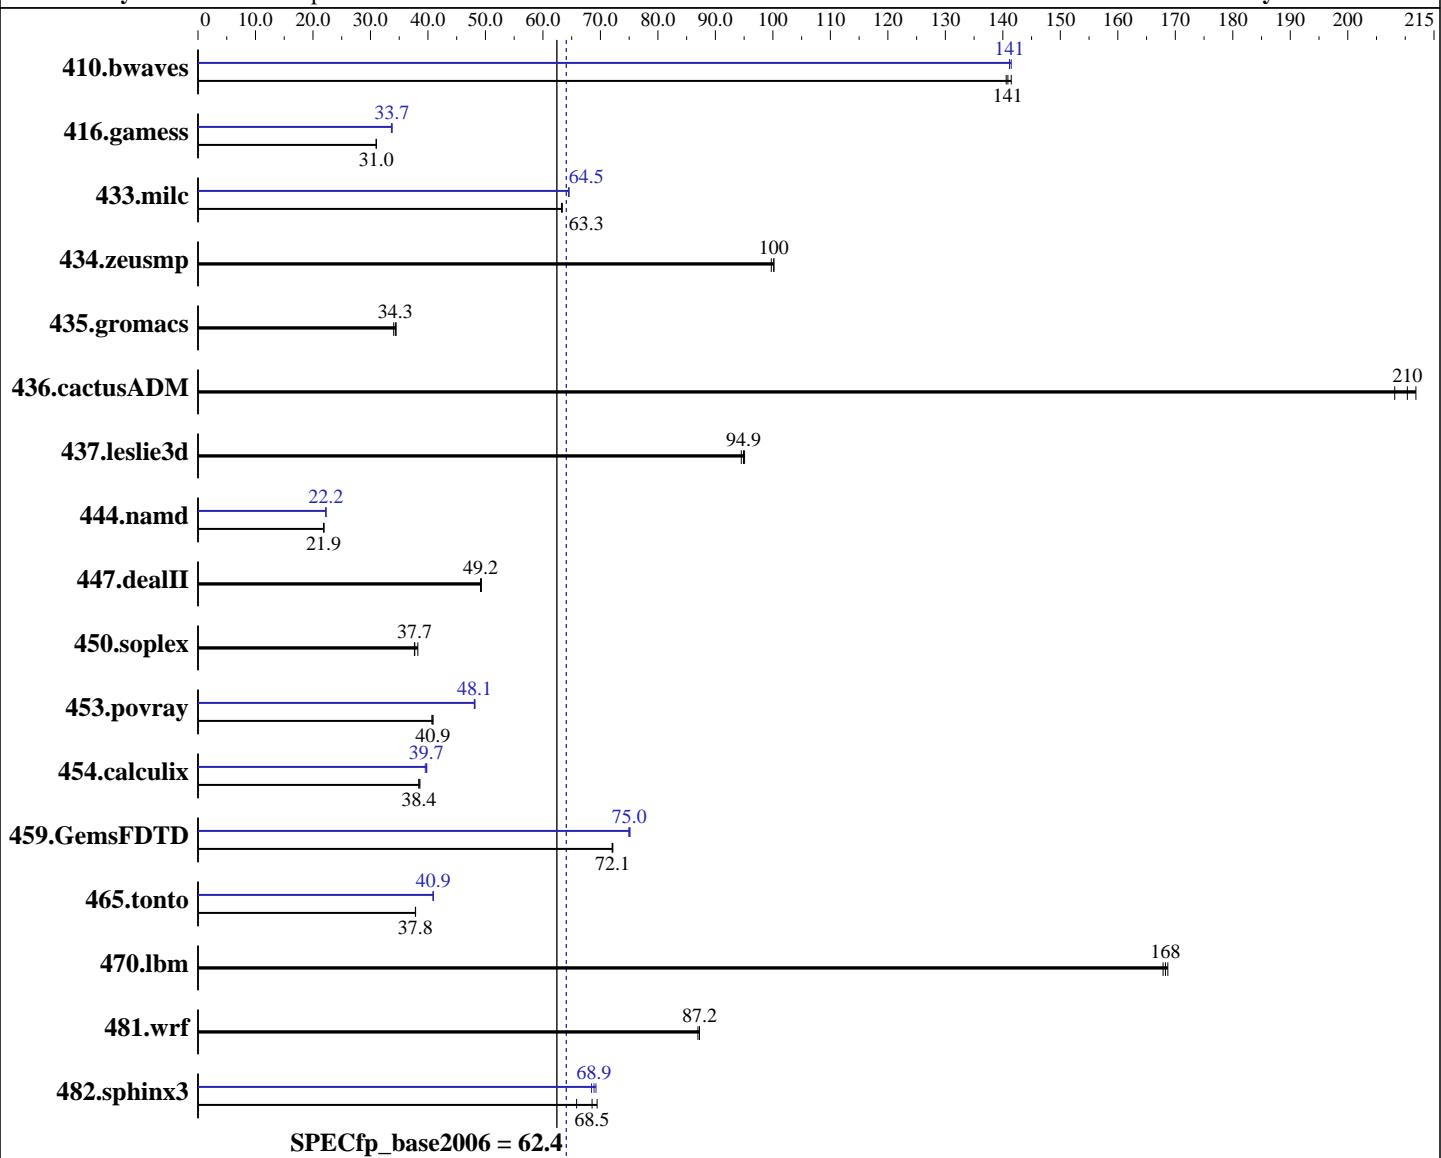

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-1410	Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz		2.6.32-220.el6.x86_64
CPU MHz:	2800	Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
FPU:	Integrated		Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core	Auto Parallel:	Yes
CPU(s) orderable:	1,2 chips	File System:	ext4
Primary Cache:	32 KB I + 32 KB D on chip per core	Continued on next page	
Secondary Cache:	256 KB I+D on chip per core		

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp2006 = 64.1**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96.1	141	<b>96.5</b>	<b>141</b>	96.7	141	<b>96.1</b>	<b>141</b>	96.3	141	<b>96.3</b>	<b>141</b>
416.gamess	632	31.0	<b>631</b>	<b>31.0</b>	631	31.0	<b>580</b>	<b>33.7</b>	580	33.7	<b>582</b>	<b>33.6</b>
433.milc	145	63.4	<b>145</b>	<b>63.3</b>	145	63.2	<b>142</b>	<b>64.5</b>	142	64.5	<b>142</b>	<b>64.5</b>
434.zeusmp	<b>90.8</b>	<b>100</b>	91.2	99.7	90.8	100	<b>90.8</b>	<b>100</b>	91.2	99.7	90.8	100
435.gromacs	210	34.0	<b>208</b>	<b>34.3</b>	207	34.5	<b>210</b>	<b>34.0</b>	<b>208</b>	<b>34.3</b>	207	34.5
436.cactusADM	<b>56.8</b>	<b>210</b>	57.4	208	56.4	212	<b>56.8</b>	<b>210</b>	57.4	208	56.4	212
437.leslie3d	<b>99.1</b>	<b>94.9</b>	98.9	95.1	99.5	94.5	<b>99.1</b>	<b>94.9</b>	98.9	95.1	99.5	94.5
444.namd	366	21.9	<b>367</b>	<b>21.9</b>	367	21.9	361	22.2	360	22.3	<b>361</b>	<b>22.2</b>
447.dealII	<b>233</b>	<b>49.2</b>	232	49.3	233	49.2	<b>233</b>	<b>49.2</b>	232	49.3	233	49.2
450.soplex	222	37.6	218	38.2	<b>221</b>	<b>37.7</b>	222	37.6	218	38.2	<b>221</b>	<b>37.7</b>
453.povray	131	40.7	<b>130</b>	<b>40.9</b>	130	40.9	110	48.2	<b>111</b>	<b>48.1</b>	111	48.1
454.calculix	214	38.6	215	38.4	<b>215</b>	<b>38.4</b>	209	39.5	<b>208</b>	<b>39.7</b>	207	39.8
459.GemsFDTD	147	72.1	<b>147</b>	<b>72.1</b>	147	72.0	<b>141</b>	<b>75.0</b>	141	75.1	142	74.9
465.tonto	260	37.9	<b>260</b>	<b>37.8</b>	260	37.8	<b>241</b>	<b>40.9</b>	241	40.9	240	41.0
470.lbm	81.8	168	<b>81.6</b>	<b>168</b>	81.4	169	81.8	168	<b>81.6</b>	<b>168</b>	81.4	169
481.wrf	128	87.0	128	87.2	<b>128</b>	<b>87.2</b>	128	87.0	128	87.2	<b>128</b>	<b>87.2</b>
482.sphinx3	296	65.9	<b>284</b>	<b>68.5</b>	281	69.4	<b>285</b>	<b>68.5</b>	<b>282</b>	<b>69.2</b>	<b>283</b>	<b>68.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3  
running on x3630m4-rhel62 Tue Jul 31 16:21:17 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.1

IBM System x3630 M4 (Intel Xeon E5-1410)

SPECfp\_base2006 = 62.4

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-1410 0 @ 2.80GHz
  1 "physical id"s (chips)
  8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings : 8
  physical 0: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      49404820 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3630m4-rhel62 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 30 11:52
```

```
SPEC is set to: /home/SPECcpu-v1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3630m4rhel62-1v_home
                  ext4   383G   20G  344G   6%  /home
```

Additional information from dmidecode:

```
Memory:
 6x Samsung M393B1K70DH0-CK0 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/SPECcpu-v1.2/libs/32:/home/SPECcpu-v1.2/libs/64"  
OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 64.1**

IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp\_base2006 = 62.4**

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## General Notes (Continued)

memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 64.1**

IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp\_base2006 = 62.4**

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 64.1**

IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp\_base2006 = 62.4**

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 64.1**

IBM System x3630 M4 (Intel Xeon E5-1410)

**SPECfp\_base2006 = 62.4**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** May-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:09:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 August 2012.