



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 224

Servidor Itaotec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001


Test date: Jan-2012

Test sponsor: Itaotec

Hardware Availability: Jun-2012

Tested by: Itaotec

Software Availability: Dec-2011

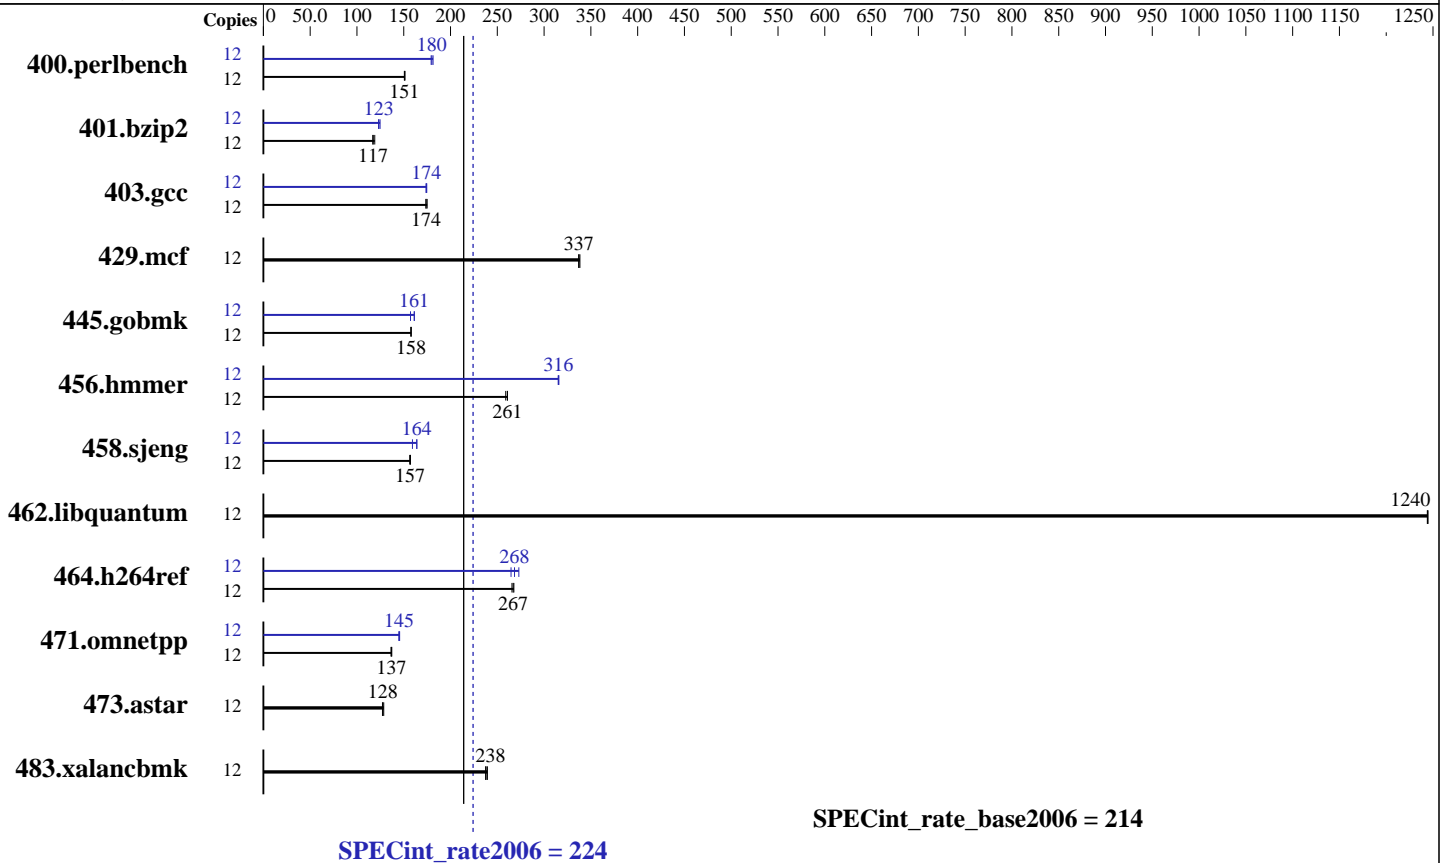

Hardware

CPU Name: Intel Xeon E5-2630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 500 GB, SATA-2, 7200RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 224

Servidor Itaotec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	776	151	778	151	775	151	12	646	181	654	179	651	180
401.bzip2	12	973	119	986	117	991	117	12	941	123	929	125	938	123
403.gcc	12	552	175	556	174	556	174	12	556	174	553	175	555	174
429.mcf	12	324	337	324	338	325	337	12	324	337	324	338	325	337
445.gobmk	12	797	158	798	158	798	158	12	781	161	780	161	801	157
456.hammer	12	432	259	429	261	429	261	12	355	315	355	316	355	316
458.sjeng	12	925	157	928	156	924	157	12	885	164	886	164	911	159
462.libquantum	12	200	1240	200	1240	200	1240	12	200	1240	200	1240	200	1240
464.h264ref	12	992	268	1000	266	995	267	12	989	268	973	273	1003	265
471.omnetpp	12	547	137	548	137	550	136	12	515	146	517	145	518	145
473.astar	12	655	129	660	128	662	127	12	655	129	660	128	662	127
483.xalancbmk	12	348	238	346	239	349	237	12	348	238	346	239	349	237

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on itaotec2fam5 Fri Jan 6 17:13:49 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Genuine Intel(R) CPU @ 2.30GHz
1 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 12

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 224

Servidor Itaotec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal: 32850880 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux itaotec2fam5 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 6 17:08

SPEC is set to: /home/rcaneca/cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_itaotec2fam5-lv_home
ext4 94G 2.1G 87G 3% /home

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itaotec MX205.
The Servidor Itaotec LX205, Servidor Itaotec MX205 and the Servidor Itaotec MX225+ are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 224

Servidor Itaotec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 224

Servidor Itautec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 224

Servidor Itaotec MX205 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 214

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.html
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.xml
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:43:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 October 2012.