



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

SPECint®2006 = 33.5

SPECint\_base2006 = 28.7

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

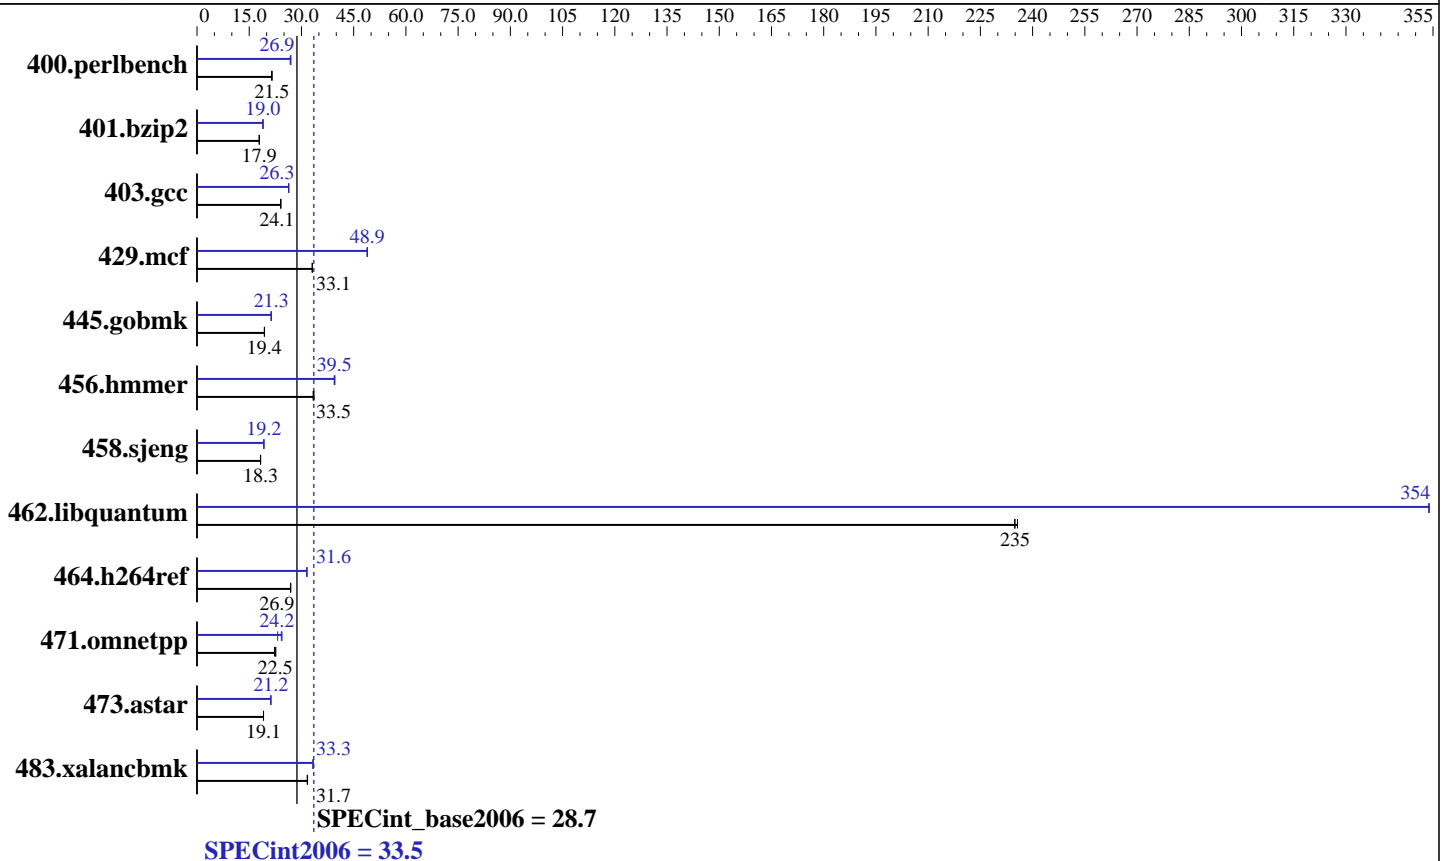

### Hardware

CPU Name: AMD Opteron 6308  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 128 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 320 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
 Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler  
 Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

SPECint2006 = 33.5

SPECint\_base2006 = 28.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>454</b>	<b>21.5</b>	455	21.5	454	21.5	362	27.0	<b>363</b>	<b>26.9</b>	365	26.8
401.bzip2	<b>539</b>	<b>17.9</b>	539	17.9	540	17.9	<b>509</b>	<b>19.0</b>	509	19.0	509	19.0
403.gcc	335	24.1	<b>335</b>	<b>24.1</b>	335	24.0	306	26.3	305	26.4	<b>306</b>	<b>26.3</b>
429.mcf	275	33.2	276	33.1	<b>275</b>	<b>33.1</b>	186	48.9	<b>187</b>	<b>48.9</b>	187	48.9
445.gobmk	<b>542</b>	<b>19.4</b>	542	19.4	542	19.4	<b>492</b>	<b>21.3</b>	492	21.3	492	21.3
456.hammer	280	33.3	<b>278</b>	<b>33.5</b>	278	33.6	<b>236</b>	<b>39.5</b>	236	39.6	237	39.4
458.sjeng	663	18.3	<b>663</b>	<b>18.3</b>	663	18.3	<b>630</b>	<b>19.2</b>	630	19.2	630	19.2
462.libquantum	87.9	236	<b>88.2</b>	<b>235</b>	88.2	235	58.5	354	58.6	354	<b>58.6</b>	<b>354</b>
464.h264ref	824	26.9	822	26.9	<b>823</b>	<b>26.9</b>	701	31.6	<b>701</b>	<b>31.6</b>	701	31.6
471.omnetpp	281	22.3	276	22.6	<b>278</b>	<b>22.5</b>	<b>258</b>	<b>24.2</b>	256	24.4	270	23.2
473.astar	<b>368</b>	<b>19.1</b>	367	19.1	368	19.1	331	21.2	331	21.2	<b>331</b>	<b>21.2</b>
483.xalancbmk	217	31.8	218	31.7	<b>218</b>	<b>31.7</b>	207	33.3	207	33.3	<b>207</b>	<b>33.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr\_hugepages=4000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "4000"
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

SPECint2006 = 33.5

SPECint\_base2006 = 28.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## General Notes (Continued)

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -CG:p2align=0  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bd=2m:heap=2m -LNO:prefetch=2

C++ benchmarks:

-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

SPECint2006 = 33.5

SPECint\_base2006 = 28.7

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Jun-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:load\_exe=0 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off  
 -GRA:prioritize\_by\_density=on -m32 -HP:bdt=2m:heap=2m

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bdt=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

**SPECint2006 = 33.5**

**SPECint\_base2006 = 28.7**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Jun-2012

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-CG:p2align=1 -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:bdt=2m:heap=2m -WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -LNO:prefetch=2 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=450 -apo

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

### C++ benchmarks:

471.omnetpp: -march=bdver1 -Ofast -D\_\_OPEN64\_FAST\_SET -CG:gcm=off  
-INLINE:aggressive=on -WOPT:if\_conv=0 -WOPT:sib=on -m32  
-HP:bdt=2m:heap=2m

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=0 -GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=0 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6308

**SPECint2006 = 33.5**

**SPECint\_base2006 = 28.7**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Jun-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:00:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 January 2013.