



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint®_rate2006 = 89.6

Servidor Itautec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

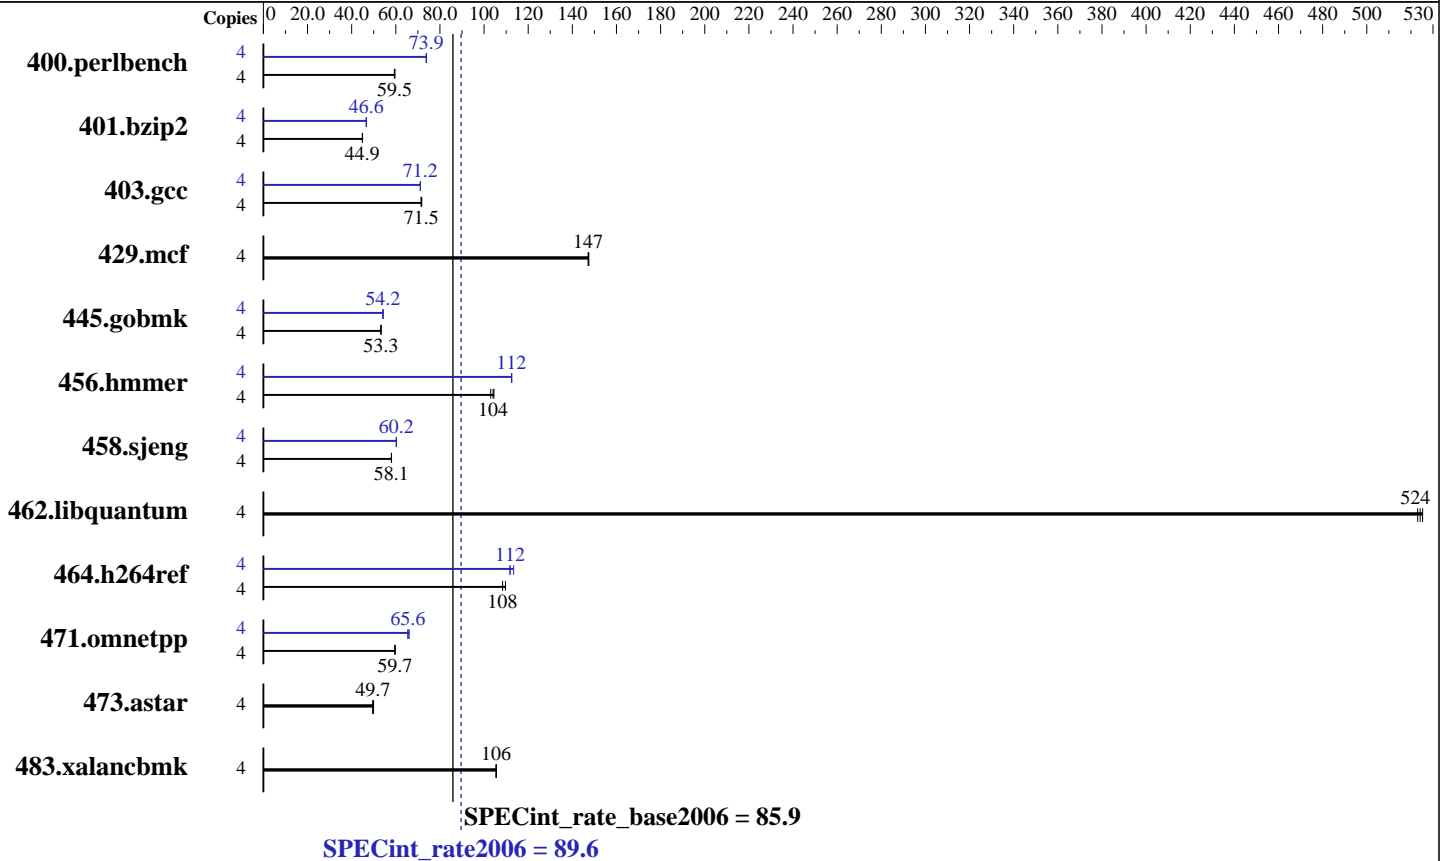

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1000 GB, SATA-3, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 89.6

Servidor Itaotec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	4	656	59.6	656	59.5	658	59.4	4	530	73.8	529	73.9	529	73.9		
401.bzip2	4	860	44.9	859	44.9	861	44.9	4	828	46.6	826	46.7	828	46.6		
403.gcc	4	449	71.8	450	71.5	450	71.5	4	452	71.2	453	71.1	452	71.2		
429.mcf	4	248	147	248	147	247	147	4	248	147	248	147	247	147		
445.gobmk	4	787	53.3	787	53.3	788	53.3	4	774	54.2	774	54.2	774	54.2		
456.hammer	4	357	104	359	104	362	103	4	332	113	332	112	332	112		
458.sjeng	4	834	58.1	835	58.0	834	58.1	4	803	60.3	804	60.2	804	60.2		
462.libquantum	4	158	524	158	525	158	523	4	158	524	158	525	158	523		
464.h264ref	4	807	110	817	108	817	108	4	792	112	792	112	781	113		
471.omnetpp	4	419	59.6	419	59.7	419	59.7	4	382	65.4	381	65.6	378	66.1		
473.astar	4	565	49.7	567	49.5	562	49.9	4	565	49.7	567	49.5	562	49.9		
483.xalancbmk	4	262	106	262	105	261	106	4	262	106	262	105	261	106		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on mx225 Mon Feb 25 15:59:46 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
1 "physical id"s (chips)
4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 89.6

Servidor Itautec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Platform Notes (Continued)

physical 0: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal: 32824280 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux mx225 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Feb 25 15:56

SPEC is set to: /home/rcaneca/cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_mx225-lv_home
ext4 836G 2.2G 791G 1% /home

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itautec MX225.
The Servidor Itautec MX215 and the Servidor Itautec MX225
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 89.6

Servidor Itaotec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 89.6

Servidor Itautec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 89.6

Servidor Itautec MX215 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 85.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:12:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 March 2013.