



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp[®]_rate2006 = 403

SPECfp_rate_base2006 = 395

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

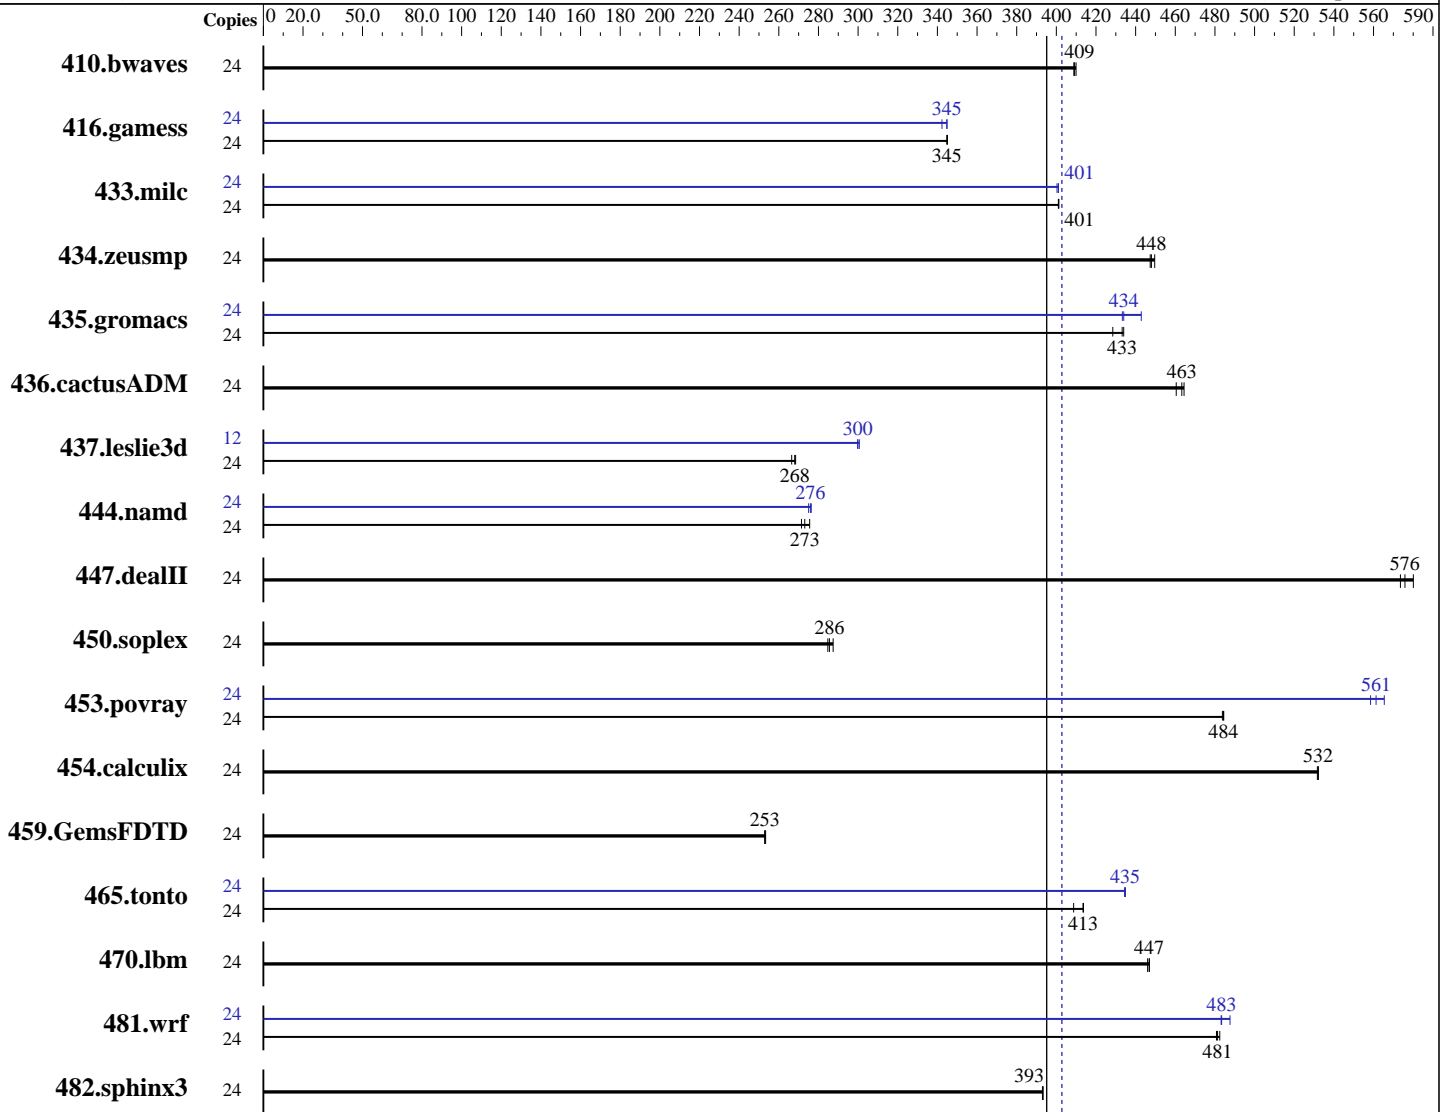

SPECfp_rate_base2006 = 395

SPECfp_rate2006 = 403

Hardware

CPU Name: Intel Xeon E5-2630L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate2006 = 403

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 1 TB 7200 RPM SATA
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	798	409	797	409	796	410	24	798	409	797	409	796	410
416.gamess	24	1362	345	1363	345	1363	345	24	1363	345	1363	345	1373	342
433.milc	24	549	401	549	401	549	401	24	550	400	549	401	549	401
434.zeusmp	24	486	450	488	448	488	447	24	486	450	488	448	488	447
435.gromacs	24	395	434	396	433	400	428	24	387	443	395	434	395	433
436.cactusADM	24	623	460	618	464	619	463	24	623	460	618	464	619	463
437.leslie3d	24	846	267	842	268	840	268	12	376	300	375	301	376	300
444.namd	24	698	276	705	273	709	271	24	698	276	700	275	696	276
447.dealII	24	473	580	479	574	477	576	24	473	580	479	574	477	576
450.soplex	24	696	287	703	285	701	286	24	696	287	703	285	701	286
453.povray	24	264	484	264	484	264	484	24	227	561	229	559	226	565
454.calculix	24	372	532	372	532	372	532	24	372	532	372	532	372	532
459.GemsFDTD	24	1007	253	1005	253	1007	253	24	1007	253	1005	253	1007	253
465.tonto	24	571	414	571	413	578	409	24	543	435	543	435	544	434
470.lbm	24	738	447	738	447	739	446	24	738	447	738	447	739	446
481.wrf	24	556	482	558	481	557	481	24	550	488	555	483	555	483
482.sphinx3	24	1190	393	1190	393	1189	393	24	1190	393	1190	393	1189	393

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 403

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes

BIOS settings:

Virtualization Technology disabled

Execute Disable disabled

Logical Processor enabled

System Profile set to Performance

Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on linux Wed Sep 18 21:19:47 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2630L v2 @ 2.40GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 264601772 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 11 (x86_64)

VERSION = 11

PATCHLEVEL = 3

uname -a:

Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 18 08:47 last=S

SPEC is set to: /root/cpu2006.1.2.ic13

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext2	817G	35G	781G	5%	/

Additional information from dmidecode:

BIOS Dell Inc. 2.0.19 08/29/2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 403

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

Memory:

8x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1600 MHz
8x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate2006 = 403

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 403

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R720xd (Intel Xeon E5-2630L v2, 2.40 GHz)

SPECfp_rate2006 = 403

SPECfp_rate_base2006 = 395

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:02:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 October 2013.