



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

SPECfp\_base2006 = **71.7**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

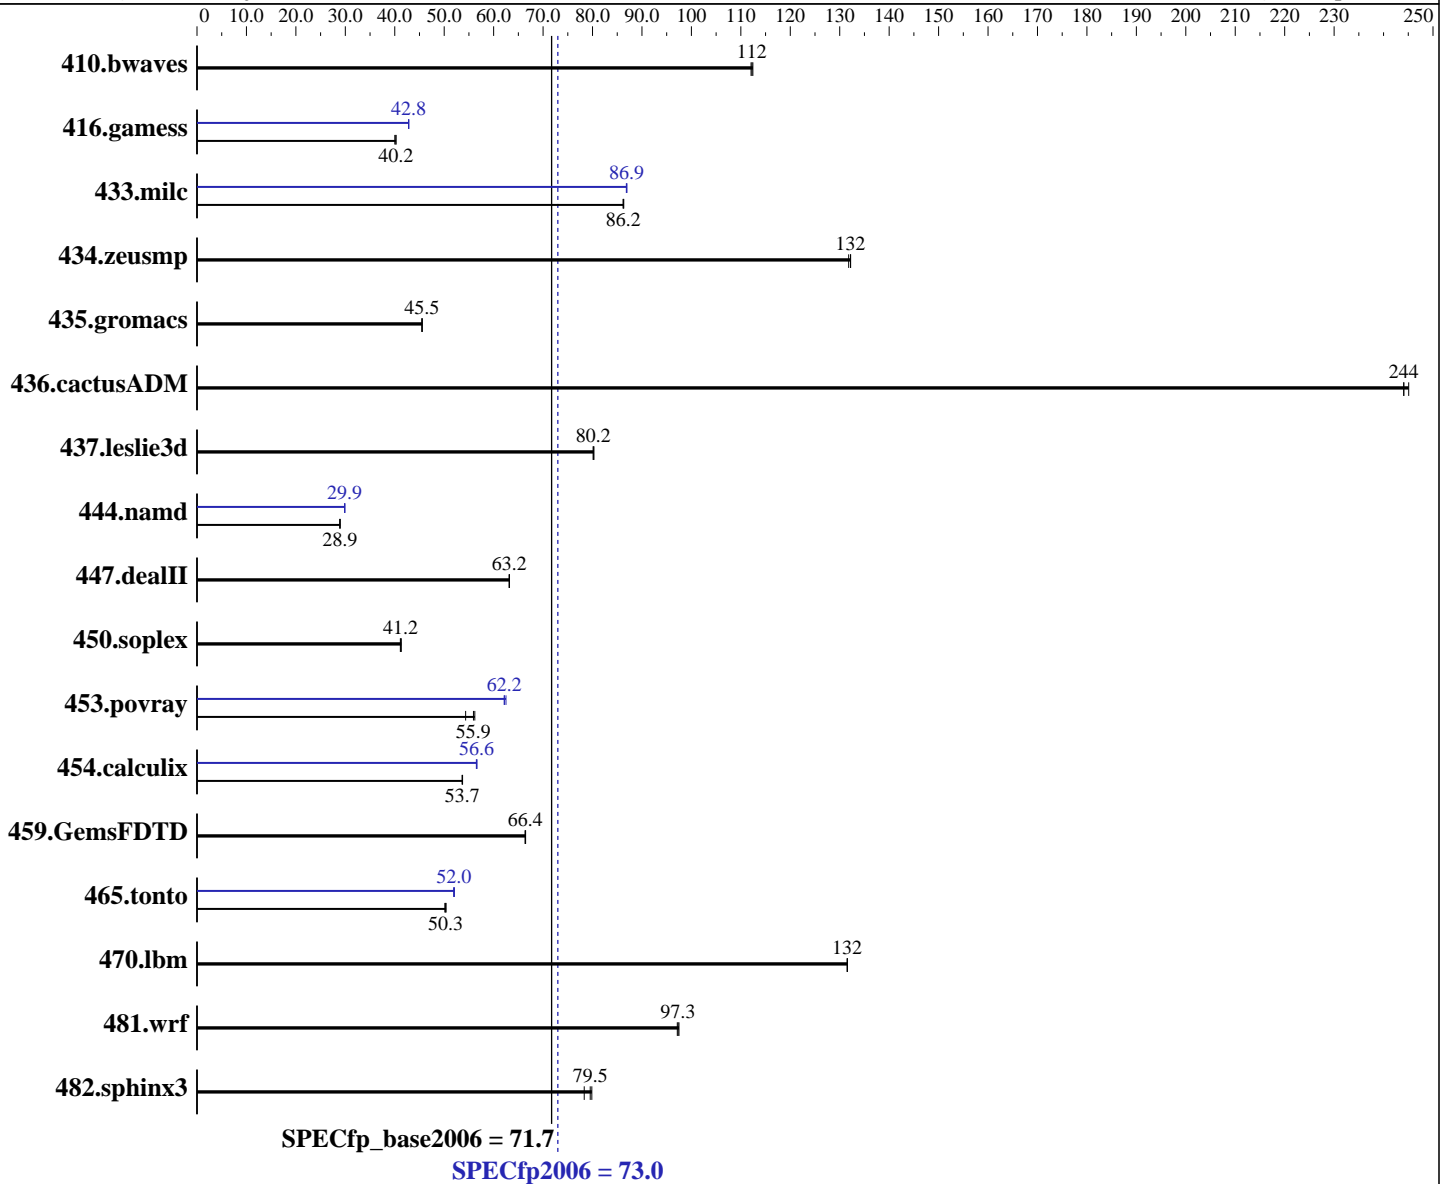

### Hardware

CPU Name: Intel Xeon E3-1230 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

SPECfp\_base2006 = **71.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>121</u></b>	<b><u>112</u></b>	121	112	121	112	<b><u>121</u></b>	<b><u>112</u></b>	121	112	121	112
416.gamess	487	40.2	<b><u>487</u></b>	<b><u>40.2</u></b>	489	40.0	457	42.8	<b><u>457</u></b>	<b><u>42.8</u></b>	457	42.8
433.milc	106	86.3	<b><u>106</u></b>	<b><u>86.2</u></b>	106	86.2	106	86.9	106	86.8	<b><u>106</u></b>	<b><u>86.9</u></b>
434.zeusmp	68.8	132	<b><u>68.8</u></b>	<b><u>132</u></b>	69.0	132	68.8	132	<b><u>68.8</u></b>	<b><u>132</u></b>	69.0	132
435.gromacs	<b><u>157</u></b>	<b><u>45.5</u></b>	157	45.6	157	45.5	<b><u>157</u></b>	<b><u>45.5</u></b>	157	45.6	157	45.5
436.cactusADM	49.0	244	<b><u>49.0</u></b>	<b><u>244</u></b>	48.8	245	49.0	244	<b><u>49.0</u></b>	<b><u>244</u></b>	48.8	245
437.leslie3d	117	80.3	<b><u>117</u></b>	<b><u>80.2</u></b>	117	80.2	117	80.3	<b><u>117</u></b>	<b><u>80.2</u></b>	117	80.2
444.namd	277	28.9	278	28.9	<b><u>277</u></b>	<b><u>28.9</u></b>	268	29.9	<b><u>268</u></b>	<b><u>29.9</u></b>	268	29.9
447.dealII	181	63.2	<b><u>181</u></b>	<b><u>63.2</u></b>	181	63.2	181	63.2	<b><u>181</u></b>	<b><u>63.2</u></b>	181	63.2
450.soplex	203	41.1	<b><u>202</u></b>	<b><u>41.2</u></b>	202	41.3	203	41.1	<b><u>202</u></b>	<b><u>41.2</u></b>	202	41.3
453.povray	97.9	54.3	94.7	56.2	<b><u>95.1</u></b>	<b><u>55.9</u></b>	<b><u>85.6</u></b>	<b><u>62.2</u></b>	85.6	62.2	85.1	62.5
454.calculix	154	53.6	<b><u>154</u></b>	<b><u>53.7</u></b>	154	53.7	146	56.5	<b><u>146</u></b>	<b><u>56.6</u></b>	146	56.6
459.GemsFDTD	160	66.5	<b><u>160</u></b>	<b><u>66.4</u></b>	160	66.4	160	66.5	<b><u>160</u></b>	<b><u>66.4</u></b>	160	66.4
465.tonto	<b><u>196</u></b>	<b><u>50.3</u></b>	196	50.1	195	50.4	189	52.1	<b><u>189</u></b>	<b><u>52.0</u></b>	190	51.9
470.lbm	104	132	104	132	<b><u>104</u></b>	<b><u>132</u></b>	104	132	104	132	<b><u>104</u></b>	<b><u>132</u></b>
481.wrf	<b><u>115</u></b>	<b><u>97.3</u></b>	115	97.1	115	97.5	<b><u>115</u></b>	<b><u>97.3</u></b>	115	97.1	115	97.5
482.sphinx3	249	78.3	244	79.9	<b><u>245</u></b>	<b><u>79.5</u></b>	249	78.3	244	79.9	<b><u>245</u></b>	<b><u>79.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

**SPECfp\_base2006 = 71.7**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## General Notes (Continued)

numactl --interleave=all runspec <etc>  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

**SPECfp\_base2006 = 71.7**

**CPU2006 license:** 19

**Test date:** Sep-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

**SPECfp\_base2006 = 71.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 73.0**

PRIMERGY RX100 S8, Intel Xeon E3-1230 v3, 3.30 GHz

**SPECfp\_base2006 = 71.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:25:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 November 2013.