



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 430

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = 421

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

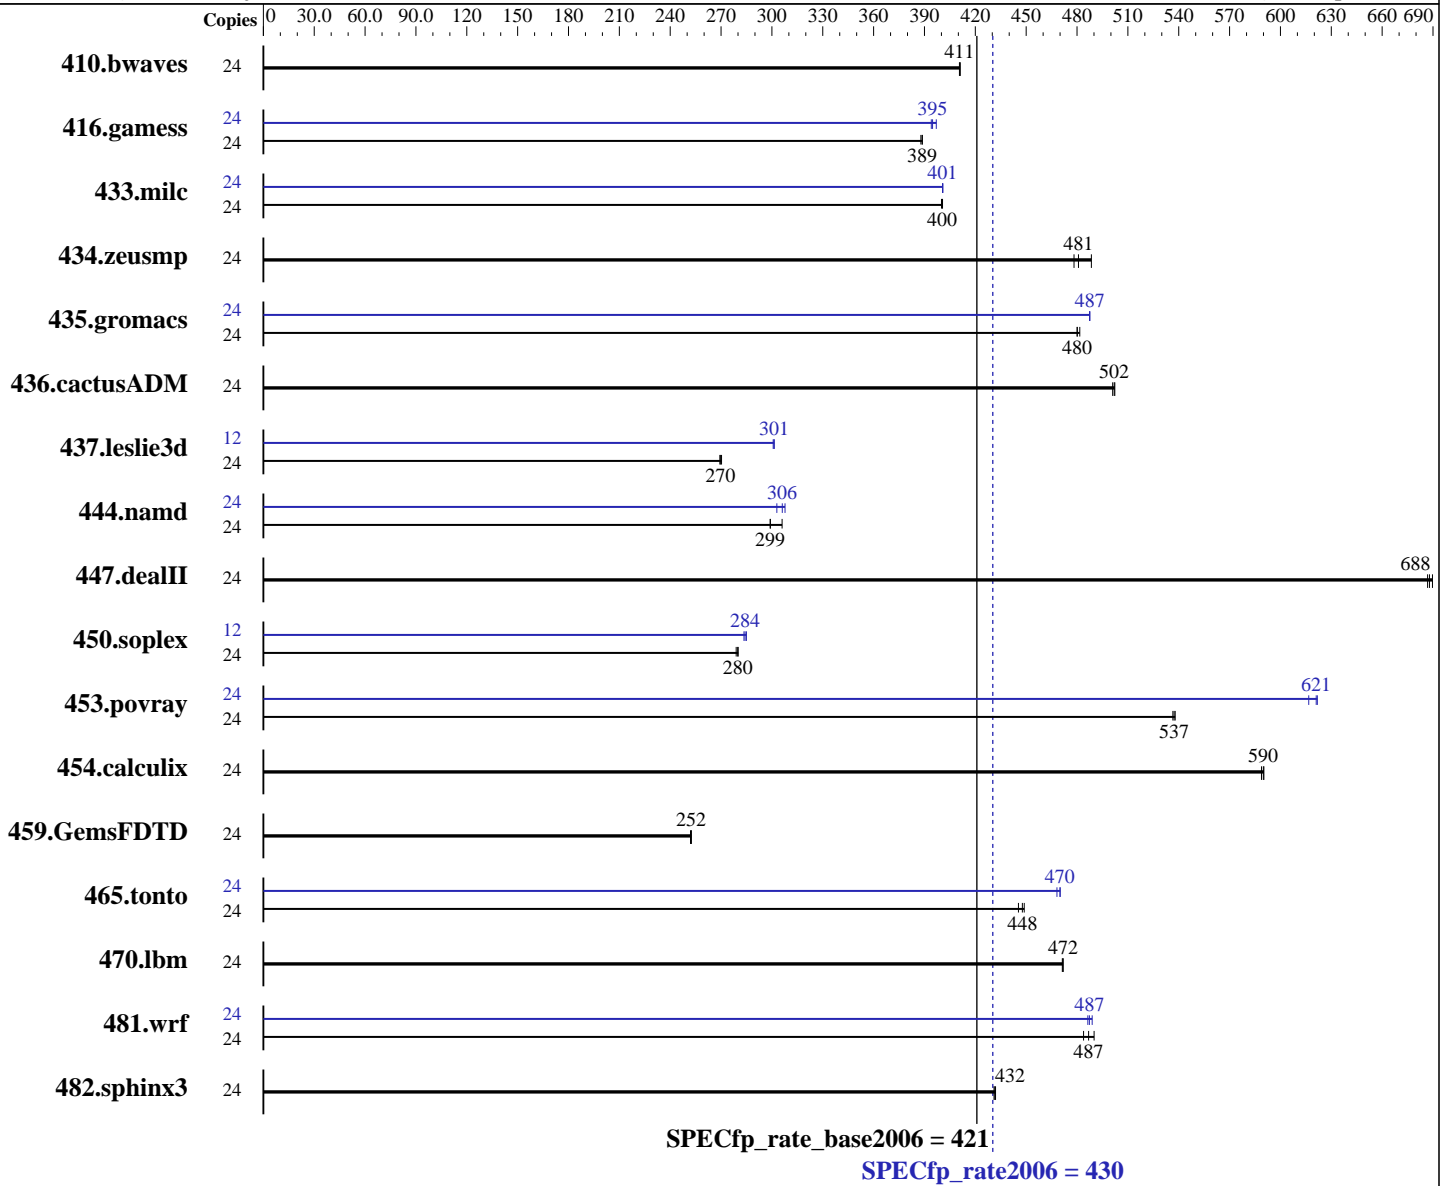

Hardware

CPU Name: Intel Xeon E5-2630 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **430**

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = **421**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	794	411	794	411	794	411	24	794	411	794	411	794	411		
416.gamess	24	1212	388	1209	389	1209	389	24	1193	394	1190	395	1184	397		
433.milc	24	551	400	550	400	550	401	24	550	401	550	401	550	401		
434.zeusmp	24	447	488	457	478	454	481	24	447	488	457	478	454	481		
435.gromacs	24	357	480	357	480	356	482	24	351	488	352	487	352	487		
436.cactusADM	24	572	501	571	502	571	502	24	572	501	571	502	571	502		
437.leslie3d	24	835	270	838	269	836	270	12	375	301	374	301	374	301		
444.namd	24	644	299	644	299	629	306	24	629	306	635	303	625	308		
447.dealII	24	399	688	400	687	398	690	24	399	688	400	687	398	690		
450.soplex	24	715	280	718	279	715	280	12	351	285	352	284	353	284		
453.povray	24	238	537	237	538	238	537	24	205	622	207	617	206	621		
454.calculix	24	335	590	336	590	336	589	24	335	590	336	590	336	589		
459.GemsFDTD	24	1009	252	1011	252	1009	252	24	1009	252	1011	252	1009	252		
465.tonto	24	526	449	530	445	527	448	24	502	470	504	468	503	470		
470.lbm	24	699	472	699	472	700	471	24	699	472	699	472	700	471		
481.wrf	24	547	490	551	487	554	484	24	550	487	548	489	551	486		
482.sphinx3	24	1084	432	1085	431	1083	432	24	1084	432	1085	431	1083	432		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Energy Performance = Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 430

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = 421

CPU2006 license: 19

Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
This result was measured on the PRIMERGY RX350 S8. The PRIMERGY RX350 S8 and the PRIMERGY TX300 S8 are electronically equivalent.
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 430

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = 421

CPU2006 license: 19

Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 430

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = 421

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 430

PRIMERGY TX300 S8, Intel Xeon E5-2630 v2, 2.60 GHz

SPECfp_rate_base2006 = 421

CPU2006 license: 19

Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 17:31:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 November 2013.