



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp®\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

CPU2006 license: 9008


Test date: Nov-2013

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

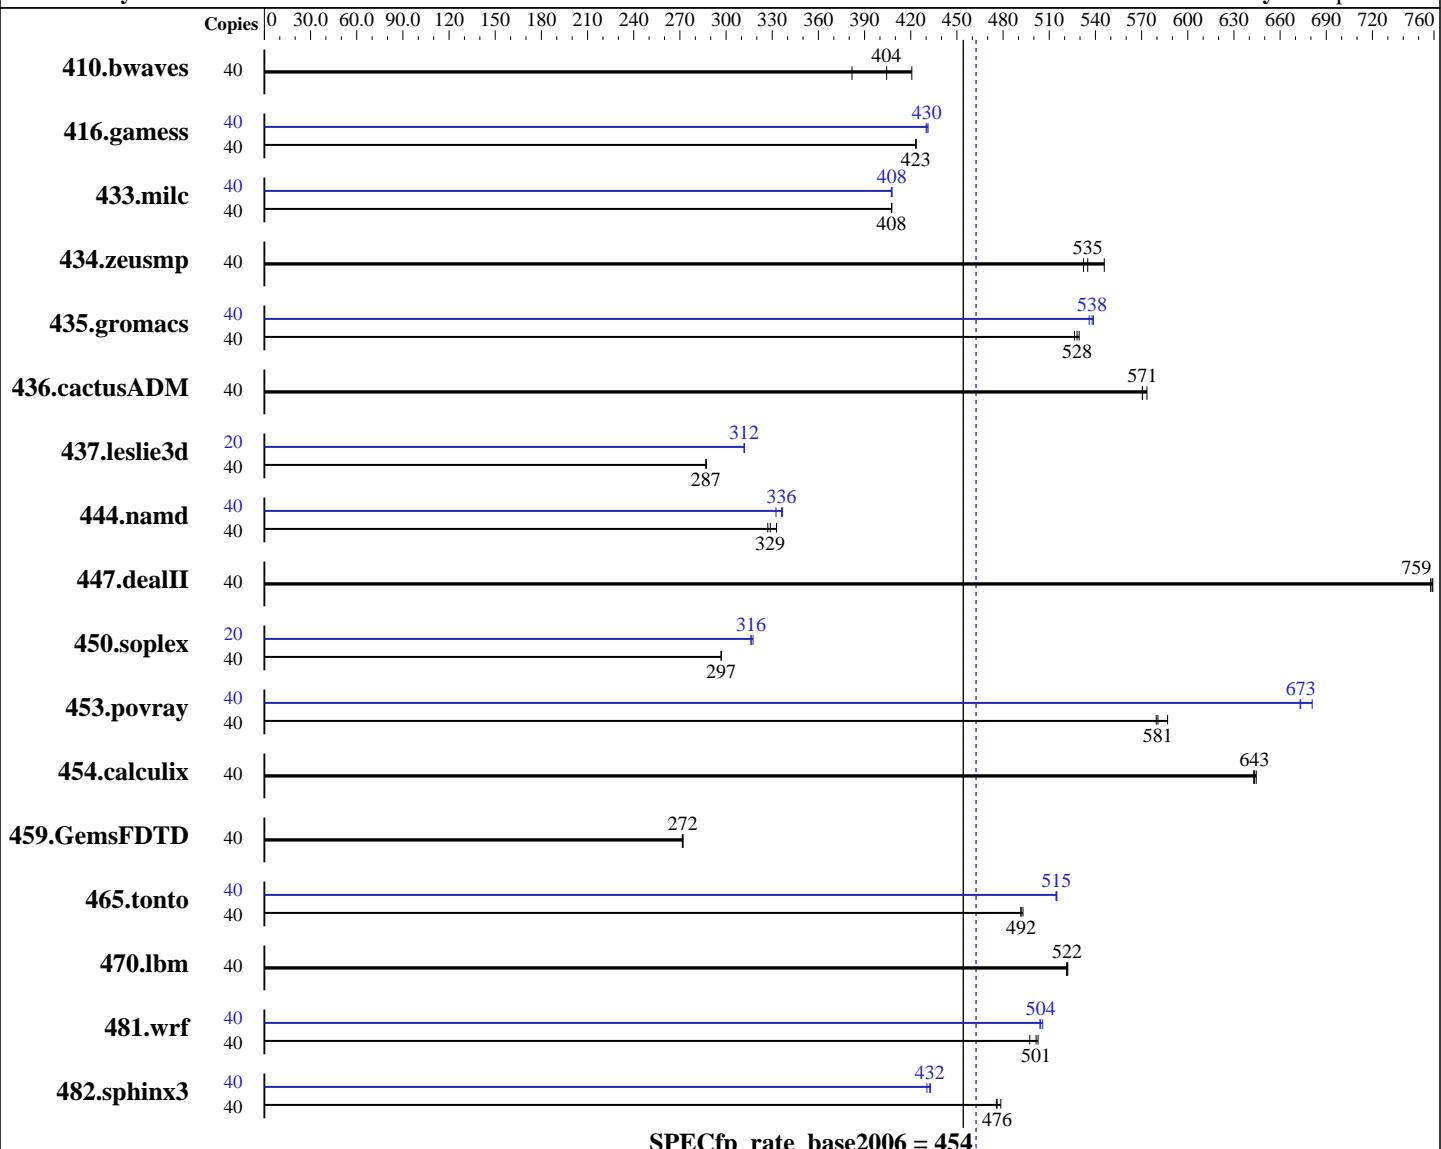

### Hardware

CPU Name: Intel Xeon E5-2650L v2  
CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
CPU MHz: 1700  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.11.1.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

CPU2006 license: 9008

Test date: Nov-2013

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running with 1600 MHz and CL11)  
 Disk Subsystem: 2 TB SATA III, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1292	421	1424	382	<u>1344</u>	<u>404</u>	40	1292	421	1424	382	<u>1344</u>	<u>404</u>		
416.gamess	40	1851	423	<u>1850</u>	<u>423</u>	1849	424	40	1816	431	1821	430	<u>1819</u>	<u>430</u>		
433.milc	40	901	408	901	407	<u>901</u>	<u>408</u>	40	<u>901</u>	<u>408</u>	901	407	901	408		
434.zeusmp	40	667	546	684	532	<u>680</u>	<u>535</u>	40	667	546	684	532	<u>680</u>	<u>535</u>		
435.gromacs	40	542	526	539	529	<u>541</u>	<u>528</u>	40	530	539	533	536	<u>531</u>	<u>538</u>		
436.cactusADM	40	<u>838</u>	<u>571</u>	833	573	838	570	40	<u>838</u>	<u>571</u>	833	573	838	570		
437.leslie3d	40	1311	287	1309	287	<u>1310</u>	<u>287</u>	20	603	312	<u>603</u>	<u>312</u>	603	312		
444.namd	40	<u>976</u>	<u>329</u>	981	327	964	333	40	953	337	965	332	<u>955</u>	<u>336</u>		
447.dealII	40	603	759	<u>603</u>	<u>759</u>	604	758	40	603	759	<u>603</u>	<u>759</u>	604	758		
450.soplex	40	<u>1124</u>	<u>297</u>	1124	297	1124	297	20	525	318	<u>527</u>	<u>316</u>	528	316		
453.povray	40	367	580	363	587	<u>367</u>	<u>581</u>	40	316	673	<u>316</u>	<u>673</u>	313	681		
454.calculix	40	512	644	513	643	<u>513</u>	<u>643</u>	40	512	644	513	643	<u>513</u>	<u>643</u>		
459.GemsFDTD	40	1563	272	1560	272	<u>1561</u>	<u>272</u>	40	1563	272	1560	272	<u>1561</u>	<u>272</u>		
465.tonto	40	<u>801</u>	<u>492</u>	798	493	801	492	40	<u>765</u>	<u>515</u>	764	515	<u>765</u>	<u>514</u>		
470.lbm	40	1053	522	1054	521	<u>1054</u>	<u>522</u>	40	1053	522	1054	521	<u>1054</u>	<u>522</u>		
481.wrf	40	898	497	<u>891</u>	<u>501</u>	889	503	40	883	506	<u>886</u>	<u>504</u>	887	504		
482.sphinx3	40	<u>1637</u>	<u>476</u>	1639	476	1629	479	40	<u>1803</u>	<u>432</u>	1801	433	1811	431		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

**CPU2006 license:** 9008

**Test date:** Nov-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$
running on localhost.localdomain Fri Nov  8 07:56:40 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings   : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:      132123136 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Thu Nov  7
11:30:53 CET 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov  7 14:44
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4   1.7T   53G  1.6T   4%  /
```

Additional information from dmidecode:  
BIOS American Megatrends Inc. 3.0 07/26/2013  
Memory:  
16x 8 GB  
14x Samsung M393B1G73BH0- 8 GB 1600 MHz 2 rank  
2x Samsung M393B1G73BH0-C 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

CPU2006 license: 9008

Test date: Nov-2013

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

## Platform Notes (Continued)

Correct memory configuration is: 16 x 8GB  
"dmidecode" didn't detect two modules properly so it reports two  
two variants of modules: "M393B1G73BH0-C" and "M393B1G73BH0-"

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips  
+ 256 GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

CPU2006 license: 9008

Test date: Nov-2013

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

## Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

**CPU2006 license:** 9008

**Test date:** Nov-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 S5 (Intel Xeon E5-2650L v2, 1.70 GHz)

**SPECfp\_rate2006 = 462**

**SPECfp\_rate\_base2006 = 454**

**CPU2006 license:** 9008

**Test date:** Nov-2013

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:50:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 December 2013.