



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp<sup>®</sup>\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

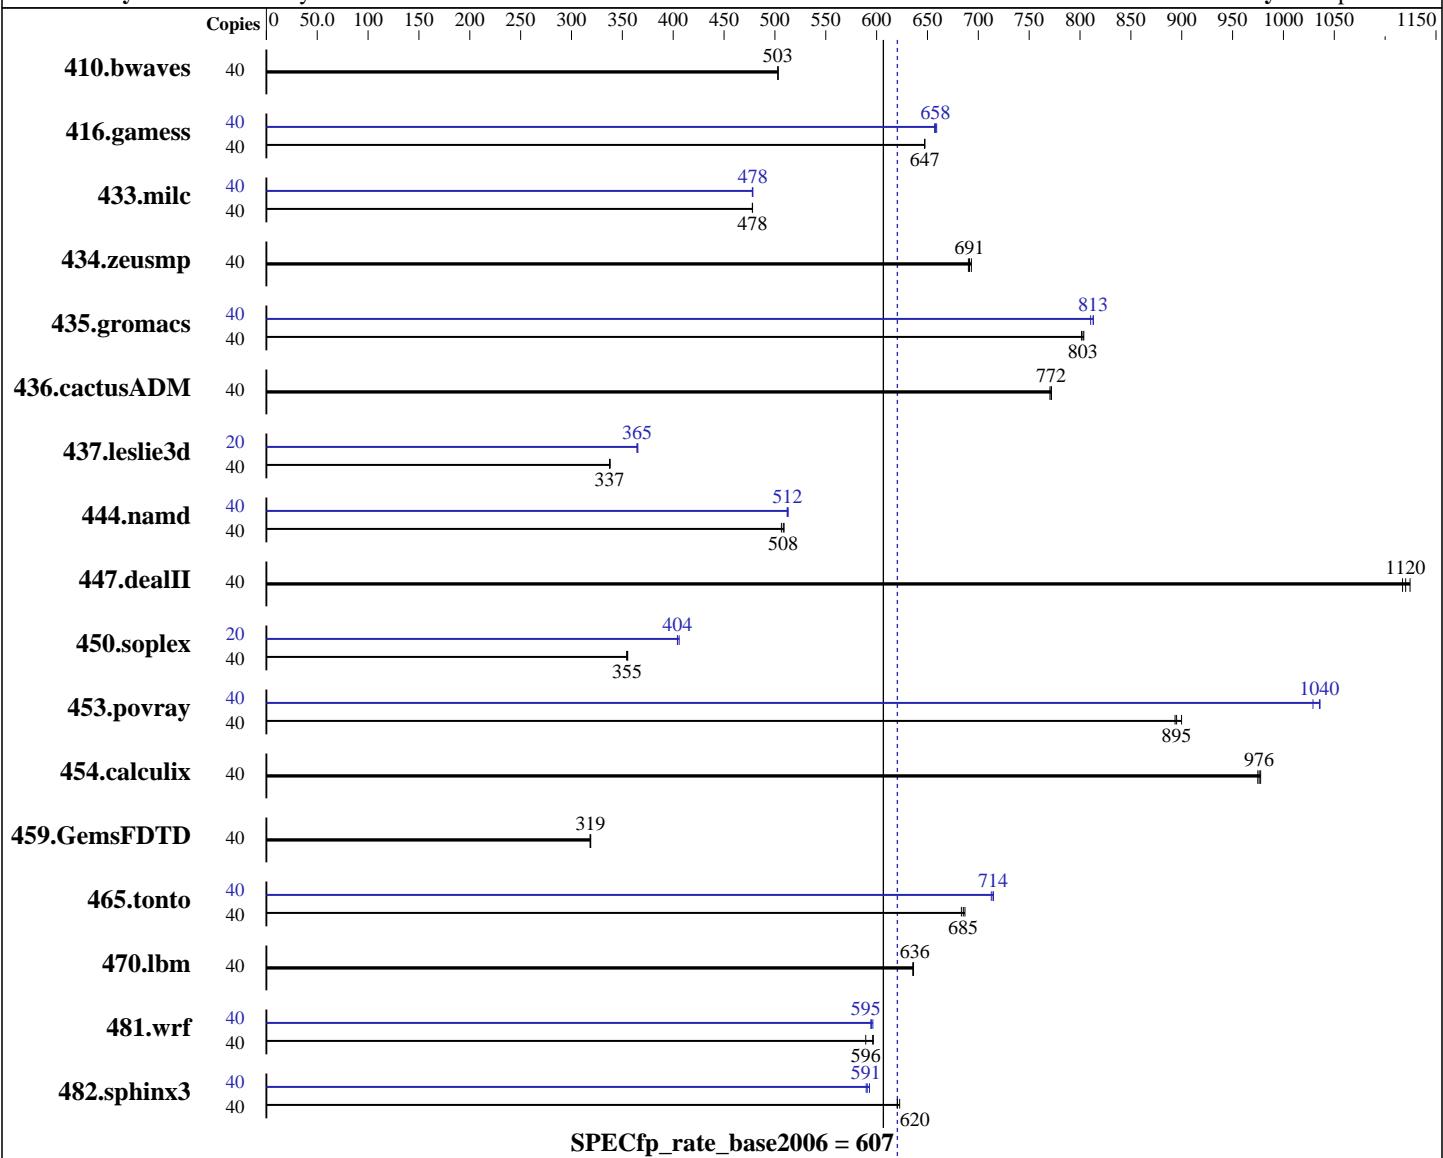

### Hardware

CPU Name: Intel Xeon E5-2670 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test date:** Dec-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Dec-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1081	503	1081	503	<b>1081</b>	<b>503</b>	40	1081	503	1081	503	<b>1081</b>	<b>503</b>
416.gamess	40	1210	647	<b>1210</b>	<b>647</b>	1210	647	40	1192	657	<b>1191</b>	<b>658</b>	1188	659
433.milc	40	<b>768</b>	<b>478</b>	768	478	768	478	40	769	478	768	478	<b>768</b>	<b>478</b>
434.zeusmp	40	527	690	525	693	<b>527</b>	<b>691</b>	40	527	690	525	693	<b>527</b>	<b>691</b>
435.gromacs	40	355	804	356	801	<b>356</b>	<b>803</b>	40	<b>351</b>	<b>813</b>	351	813	352	810
436.cactusADM	40	<b>619</b>	<b>772</b>	619	772	620	770	40	<b>619</b>	<b>772</b>	619	772	620	770
437.leslie3d	40	1114	337	1112	338	<b>1114</b>	<b>337</b>	20	516	364	<b>516</b>	<b>365</b>	515	365
444.namd	40	634	506	<b>631</b>	<b>508</b>	630	509	40	626	512	625	513	<b>626</b>	<b>512</b>
447.dealII	40	407	1120	<b>409</b>	<b>1120</b>	410	1120	40	407	1120	<b>409</b>	<b>1120</b>	410	1120
450.soplex	40	939	355	942	354	<b>940</b>	<b>355</b>	20	<b>413</b>	<b>404</b>	413	404	411	406
453.povray	40	238	893	<b>238</b>	<b>895</b>	236	900	40	205	1040	207	1030	<b>206</b>	<b>1040</b>
454.calculix	40	339	975	338	978	<b>338</b>	<b>976</b>	40	339	975	338	978	<b>338</b>	<b>976</b>
459.GemsFDTD	40	<b>1332</b>	<b>319</b>	1331	319	1333	318	40	<b>1332</b>	<b>319</b>	1331	319	1333	318
465.tonto	40	<b>574</b>	<b>685</b>	576	683	573	687	40	551	715	552	713	<b>551</b>	<b>714</b>
470.lbm	40	864	636	865	636	<b>864</b>	<b>636</b>	40	864	636	865	636	<b>864</b>	<b>636</b>
481.wrf	40	749	597	758	589	<b>750</b>	<b>596</b>	40	749	596	752	594	<b>751</b>	<b>595</b>
482.sphinx3	40	1252	623	1257	620	<b>1256</b>	<b>620</b>	40	<b>1319</b>	<b>591</b>	1315	593	1322	590

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
 Intel HT Technology = Enabled  
 CPU performance set to HPC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test date:** Dec-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Dec-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Platform Notes (Continued)

Power Technology set to Custom

CPU Power State C6 set to Enabled

CPU Power State C1 Enhanced set to Disabled

Energy Performance policy set to Performance

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

LV DDR Mode set to Performance-mode

DRAM Refresh Rate Set to 1x

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on SL1-IVB Sun Dec 8 22:43:10 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132123300 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux SL1-IVB 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 8 22:36
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/sdb1        ext4   275G  270G    0 100% /
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

Additional information from dmidecode:

BIOS Cisco Systems, Inc. C220M3.1.5.2.27.071120132232 07/11/2013

Memory:

16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test date:** Dec-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Dec-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_rate2006 = 620**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:55:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 December 2013.