



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp®\_rate2006 = 695

SPECfp\_rate\_base2006 = 676

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

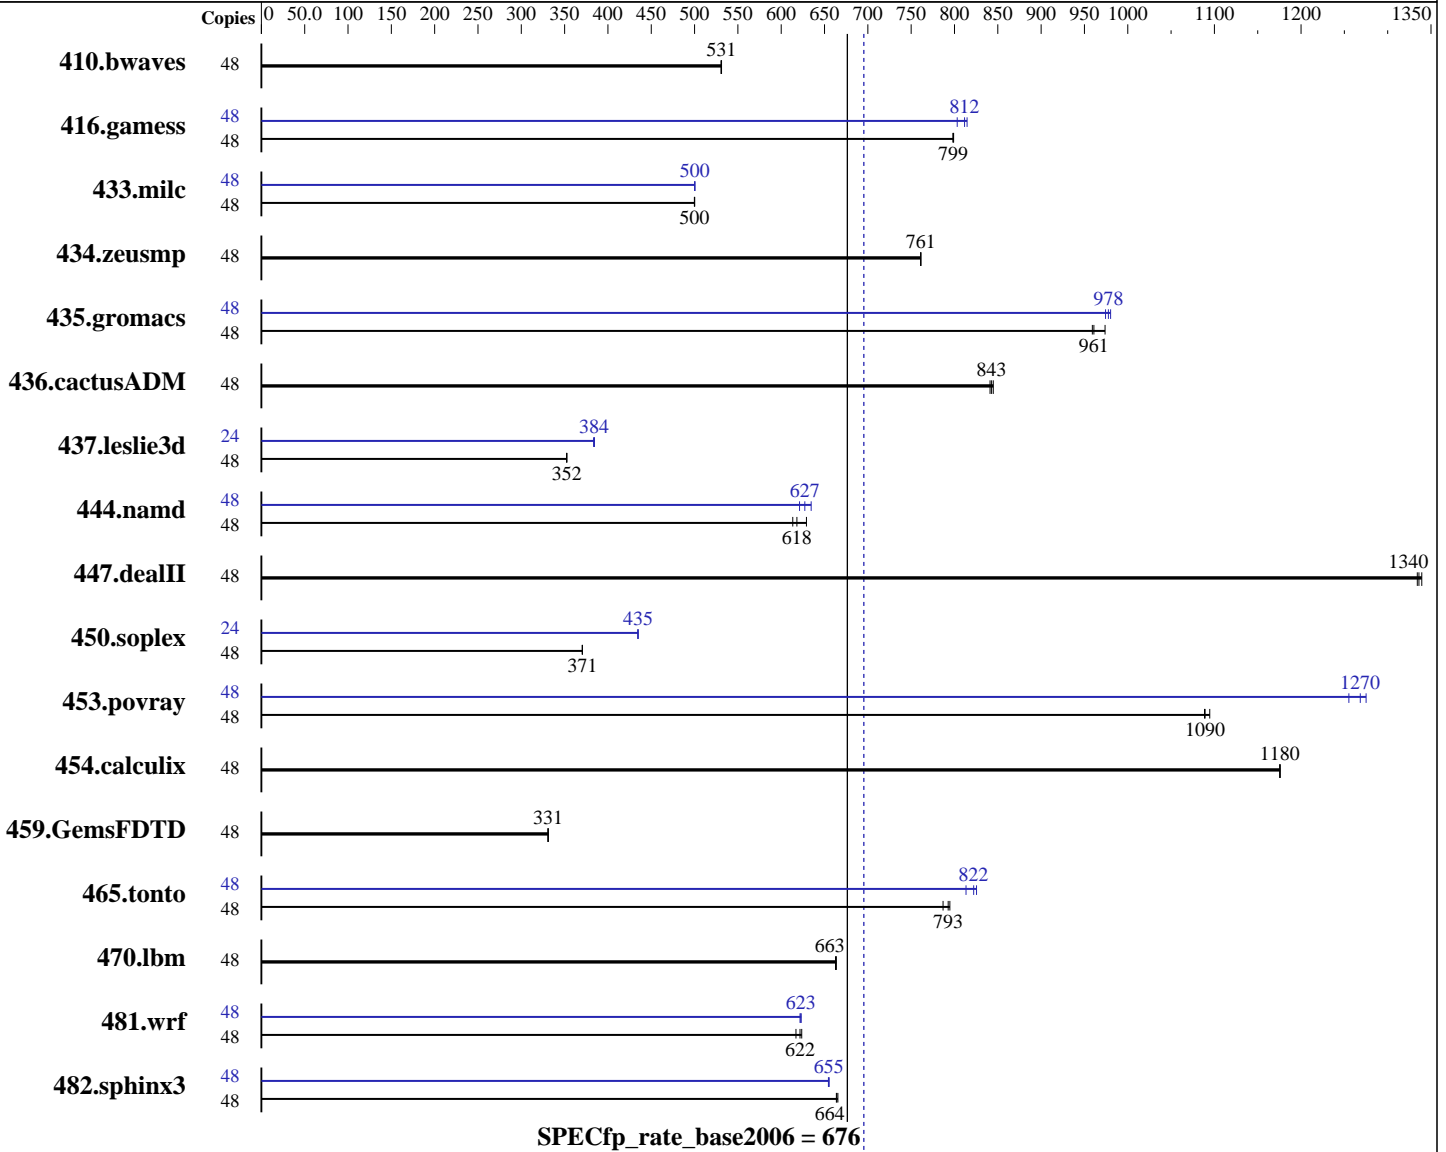

### Hardware

CPU Name: Intel Xeon E5-2697 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp\_rate2006 = **695**

SPECfp\_rate\_base2006 = **676**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 300 GB SATA III, 10000 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	<b>1229</b>	<b>531</b>	1228	531	1230	531	48	<b>1229</b>	<b>531</b>	1228	531	1230	531
416.gamess	48	1176	799	1177	798	<b>1177</b>	<b>799</b>	48	1154	815	1170	803	<b>1158</b>	<b>812</b>
433.milc	48	882	500	881	500	<b>881</b>	<b>500</b>	48	881	500	881	500	<b>881</b>	<b>500</b>
434.zeusmp	48	574	761	574	761	<b>574</b>	<b>761</b>	48	574	761	574	761	<b>574</b>	<b>761</b>
435.gromacs	48	<b>357</b>	<b>961</b>	352	974	357	959	48	352	974	350	980	<b>351</b>	<b>978</b>
436.cactusADM	48	682	841	679	845	<b>681</b>	<b>843</b>	48	682	841	679	845	<b>681</b>	<b>843</b>
437.leslie3d	48	<b>1280</b>	<b>352</b>	1280	353	1280	352	24	<b>587</b>	<b>384</b>	588	383	587	384
444.namd	48	628	613	<b>623</b>	<b>618</b>	612	629	48	620	621	607	635	<b>614</b>	<b>627</b>
447.dealII	48	412	1330	410	1340	<b>411</b>	<b>1340</b>	48	412	1330	410	1340	<b>411</b>	<b>1340</b>
450.soplex	48	<b>1080</b>	<b>371</b>	1080	371	1081	370	24	461	434	<b>460</b>	<b>435</b>	460	435
453.povray	48	233	1090	<b>234</b>	<b>1090</b>	235	1090	48	<b>201</b>	<b>1270</b>	200	1280	203	1260
454.calculix	48	337	1180	337	1180	<b>337</b>	<b>1180</b>	48	337	1180	337	1180	<b>337</b>	<b>1180</b>
459.GemsFDTD	48	1538	331	1540	331	<b>1539</b>	<b>331</b>	48	1538	331	1540	331	<b>1539</b>	<b>331</b>
465.tonto	48	<b>596</b>	<b>793</b>	594	795	600	787	48	581	813	<b>575</b>	<b>822</b>	572	825
470.lbm	48	995	663	994	664	<b>994</b>	<b>663</b>	48	995	663	994	664	<b>994</b>	<b>663</b>
481.wrf	48	860	624	869	617	<b>862</b>	<b>622</b>	48	861	623	862	622	<b>861</b>	<b>623</b>
482.sphinx3	48	1406	665	1410	664	<b>1409</b>	<b>664</b>	48	1429	654	<b>1429</b>	<b>655</b>	1428	655

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp\_rate2006 = 695

SPECfp\_rate\_base2006 = 676

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Nov-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

### General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp\_rate2006 = 695

SPECfp\_rate\_base2006 = 676

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Nov-2013  
**Hardware Availability:** Oct-2013  
**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp\_rate2006 = 695

SPECfp\_rate\_base2006 = 676

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 7047A-T  
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp\_rate2006 = 695

SPECfp\_rate\_base2006 = 676

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:07:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.