



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp®\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

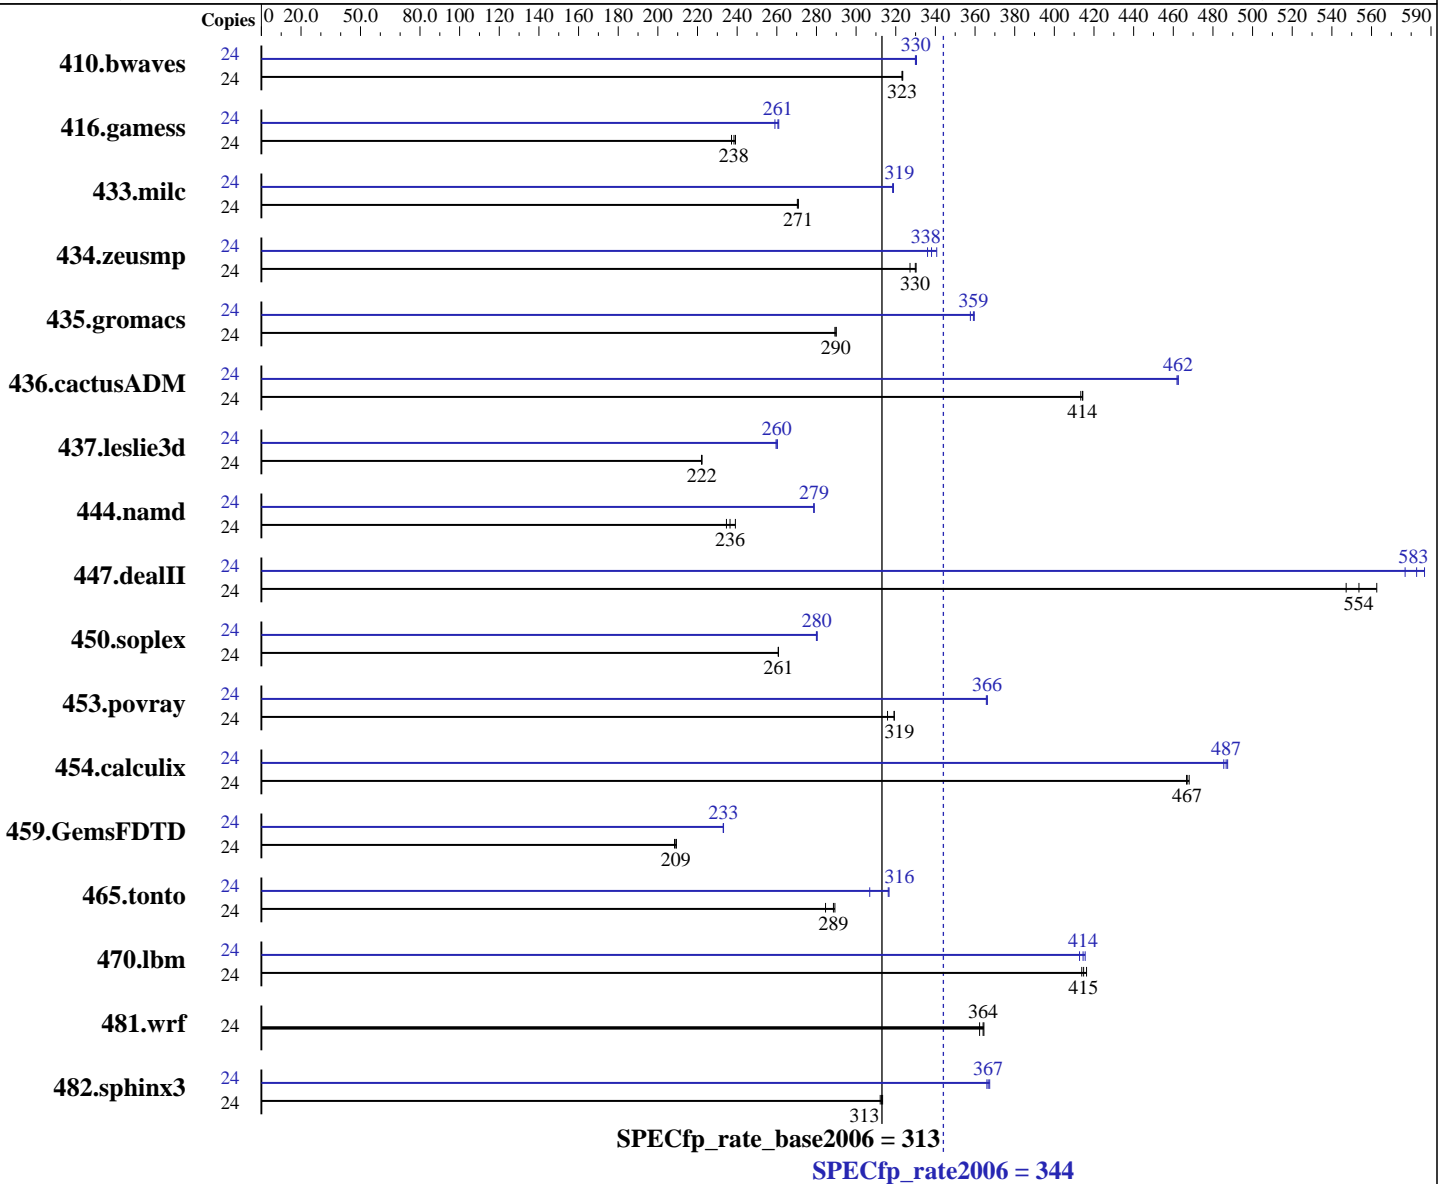

### Hardware

CPU Name: AMD Opteron 6338P  
 CPU Characteristics: AMD Turbo CORE technology up to 2.80 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
 Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64  
 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

Primary Cache: 384 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 300 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1009	323	1008	324	<b>1009</b>	<b>323</b>	24	987	330	<b>988</b>	<b>330</b>	989	330
416.gamess	24	1981	237	<b>1971</b>	<b>238</b>	1965	239	24	1814	259	1801	261	<b>1803</b>	<b>261</b>
433.milc	24	813	271	<b>814</b>	<b>271</b>	815	270	24	692	318	691	319	<b>691</b>	<b>319</b>
434.zeusmp	24	<b>662</b>	<b>330</b>	661	330	667	327	24	650	336	641	341	<b>646</b>	<b>338</b>
435.gromacs	24	592	289	591	290	<b>591</b>	<b>290</b>	24	477	360	479	358	<b>477</b>	<b>359</b>
436.cactusADM	24	694	413	<b>692</b>	<b>414</b>	692	414	24	621	462	<b>620</b>	<b>462</b>	620	462
437.leslie3d	24	1015	222	1016	222	<b>1016</b>	<b>222</b>	24	<b>867</b>	<b>260</b>	869	260	867	260
444.namd	24	<b>814</b>	<b>236</b>	805	239	820	235	24	690	279	691	279	<b>690</b>	<b>279</b>
447.dealII	24	502	547	488	563	<b>496</b>	<b>554</b>	24	476	577	<b>471</b>	<b>583</b>	468	587
450.soplex	24	<b>767</b>	<b>261</b>	767	261	768	261	24	715	280	714	280	<b>714</b>	<b>280</b>
453.povray	24	404	316	<b>400</b>	<b>319</b>	400	319	24	<b>349</b>	<b>366</b>	349	366	349	366
454.calculix	24	<b>424</b>	<b>467</b>	424	467	423	468	24	<b>407</b>	<b>487</b>	408	485	406	487
459.GemsFDTD	24	1222	208	1216	209	<b>1218</b>	<b>209</b>	24	1092	233	1093	233	<b>1092</b>	<b>233</b>
465.tonto	24	816	289	<b>818</b>	<b>289</b>	830	285	24	746	317	<b>747</b>	<b>316</b>	770	307
470.lbm	24	797	414	792	416	<b>795</b>	<b>415</b>	24	<b>796</b>	<b>414</b>	794	416	799	413
481.wrf	24	740	362	736	364	<b>736</b>	<b>364</b>	24	740	362	736	364	<b>736</b>	<b>364</b>
482.sphinx3	24	1498	312	1493	313	<b>1495</b>	<b>313</b>	24	1273	367	<b>1276</b>	<b>367</b>	1278	366

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/work/cpu2006/amd1206-rate-libs-revA/32:/root/work/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore

## Peak Optimization Flags

### C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs\_best=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
 -march=bdver1

470.lbm: -Ofast -CG:cmp\_peep=on -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -march=bdver1 -mso

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -m32 -IPA:plimit=1000 -OPT:malloc\_alg=2 -CG:cmp\_peep=on  
 -CG:p2align=0 -CG:load\_exe=1 -CG:dsched=on  
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch\_ahead=4  
 -mso -march=bdver2

### C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
 -OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver1

447.dealIII: -Ofast -D\_\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
 -march=bdver1

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

SPECfp\_rate2006 = 344

SPECfp\_rate\_base2006 = 313

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2013

Hardware Availability: Jan-2014

Software Availability: Oct-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on

-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024

-OPT:unroll\_times\_max=16 -LNO:fission=2

-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1

-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint

-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,  
AMD Opteron 6338P

**SPECfp\_rate2006 = 344**

**SPECfp\_rate\_base2006 = 313**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Aug-2013

**Hardware Availability:** Jan-2014

**Software Availability:** Oct-2012

## Peak Optimization Flags (Continued)

481.wrf:basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:04:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 January 2014.