



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

SPECfp®2006 = 87.1

SPECfp\_base2006 = 83.4

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2014

Hardware Availability: Mar-2014

Software Availability: Sep-2013

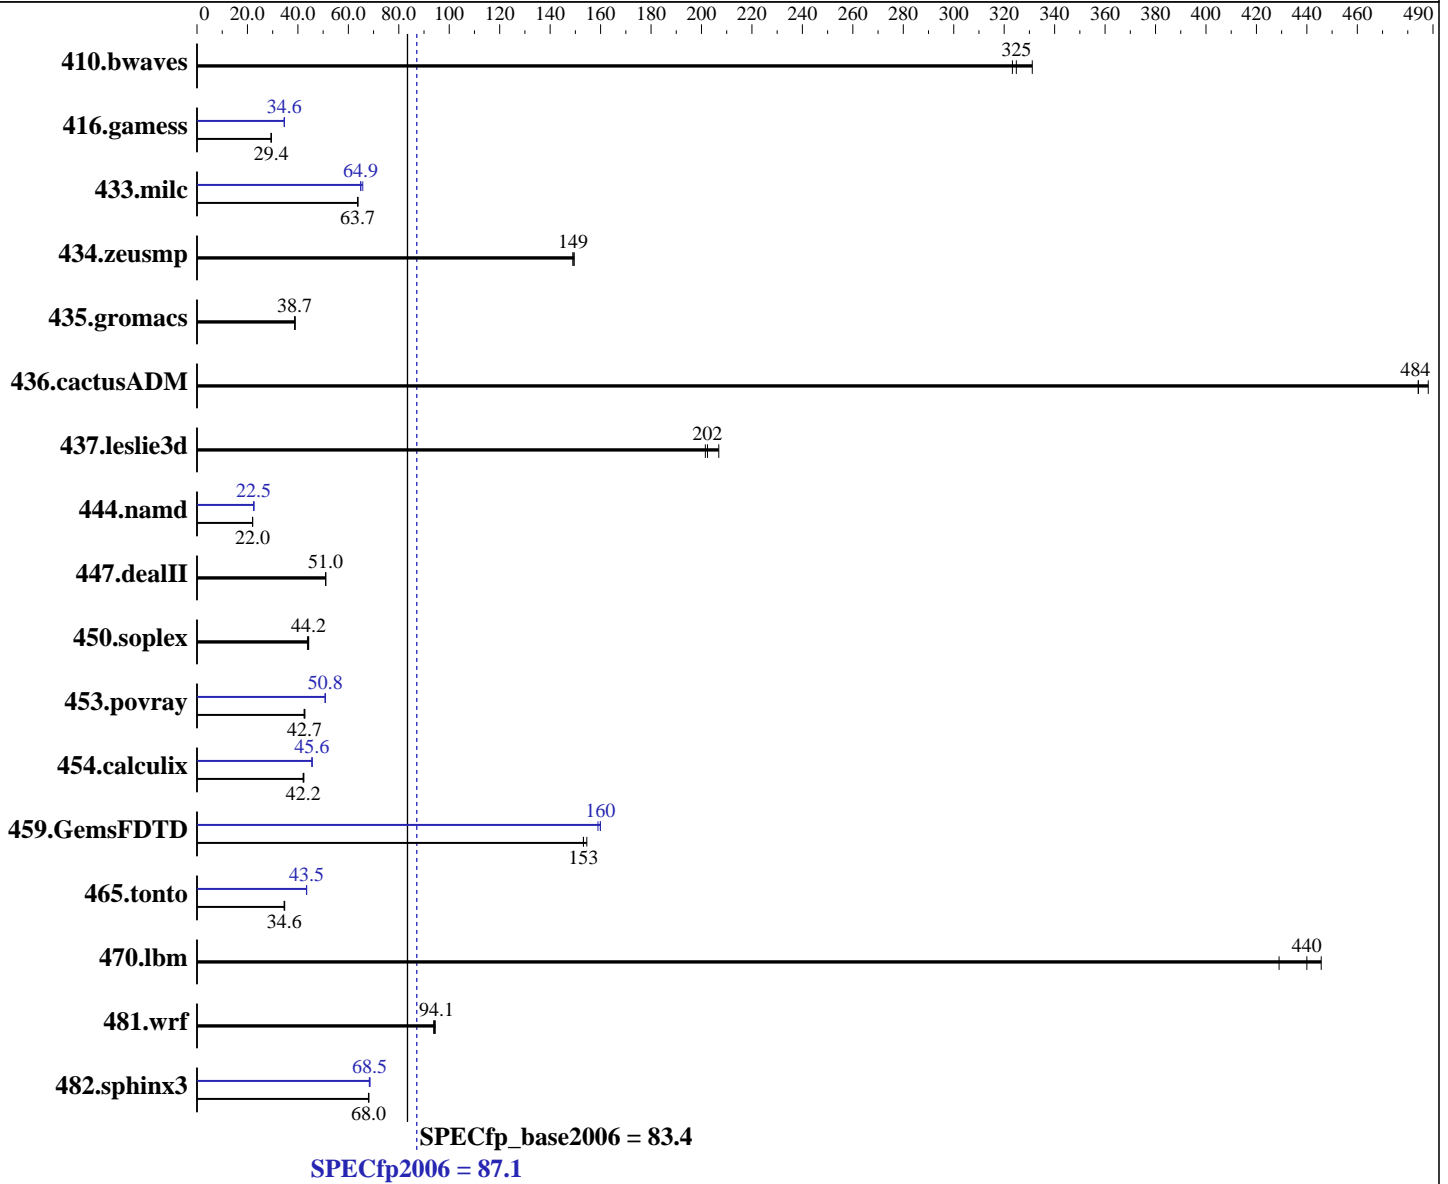

### Hardware

CPU Name: Intel Xeon E5-2470 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

SPECfp2006 = **87.1**

SPECfp\_base2006 = **83.4**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jan-2014  
Hardware Availability: Mar-2014  
Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>41.8</b>	<b>325</b>	41.0	331	42.0	323	<b>41.8</b>	<b>325</b>	41.0	331	42.0	323
416.gamess	<b>665</b>	<b>29.4</b>	665	29.4	666	29.4	<b>566</b>	<b>34.6</b>	566	34.6	565	34.7
433.milc	144	63.7	144	63.8	<b>144</b>	<b>63.7</b>	140	65.7	141	64.9	<b>141</b>	<b>64.9</b>
434.zeusmp	61.0	149	60.8	150	<b>61.0</b>	<b>149</b>	61.0	149	60.8	150	<b>61.0</b>	<b>149</b>
435.gromacs	183	38.9	<b>184</b>	<b>38.7</b>	184	38.7	183	38.9	<b>184</b>	<b>38.7</b>	184	38.7
436.cactusADM	<b>24.7</b>	<b>484</b>	24.5	488	24.7	484	<b>24.7</b>	<b>484</b>	24.5	488	24.7	484
437.leslie3d	<b>46.4</b>	<b>202</b>	45.4	207	46.6	202	<b>46.4</b>	<b>202</b>	45.4	207	46.6	202
444.namd	364	22.0	<b>364</b>	<b>22.0</b>	363	22.1	<b>356</b>	<b>22.5</b>	356	22.5	356	22.5
447.dealII	224	51.0	<b>224</b>	<b>51.0</b>	224	51.0	224	51.0	<b>224</b>	<b>51.0</b>	224	51.0
450.soplex	190	43.8	<b>189</b>	<b>44.2</b>	188	44.3	190	43.8	<b>189</b>	<b>44.2</b>	188	44.3
453.povray	124	42.7	<b>125</b>	<b>42.7</b>	125	42.5	<b>105</b>	<b>50.8</b>	105	50.9	105	50.8
454.calculix	196	42.1	195	42.4	<b>196</b>	<b>42.2</b>	181	45.6	181	45.6	<b>181</b>	<b>45.6</b>
459.GemsFDTD	<b>69.3</b>	<b>153</b>	69.3	153	68.7	155	<b>66.3</b>	<b>160</b>	66.7	159	66.3	160
465.tonto	285	34.6	283	34.8	<b>284</b>	<b>34.6</b>	226	43.5	<b>226</b>	<b>43.5</b>	227	43.4
470.lbm	32.0	429	30.8	446	<b>31.2</b>	<b>440</b>	32.0	429	30.8	446	<b>31.2</b>	<b>440</b>
481.wrf	118	94.5	119	93.8	<b>119</b>	<b>94.1</b>	118	94.5	119	93.8	<b>119</b>	<b>94.1</b>
482.sphinx3	<b>287</b>	<b>68.0</b>	286	68.2	287	68.0	<b>285</b>	<b>68.5</b>	284	68.6	285	68.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECfp2006 = 87.1**

**SPECfp\_base2006 = 83.4**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"  
OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECfp2006 = 87.1**

**SPECfp\_base2006 = 83.4**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

**SPECfp2006 = 87.1**

**SPECfp\_base2006 = 83.4**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2470 v2, 2.40 GHz)

SPECfp2006 = 87.1

SPECfp\_base2006 = 83.4

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jan-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:33:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 March 2014.