



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®2006 = **67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

SPECint\_base2006 = **62.8**

CPU2006 license: 3


Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

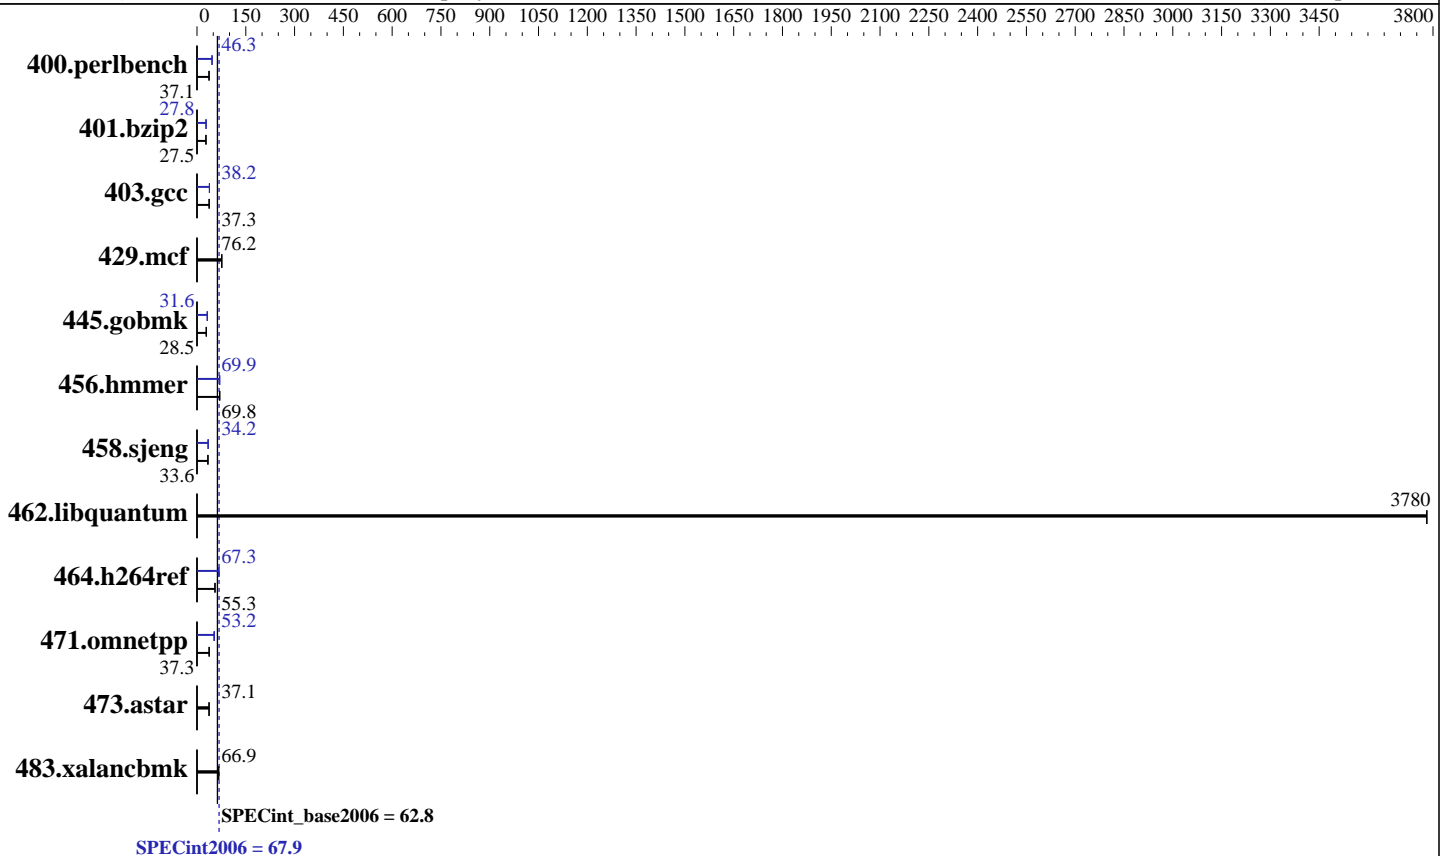

### Hardware

CPU Name: Intel Xeon E5-2667 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB 10 K SAS, RAID 0  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP3  
 Kernel 3.0.76-0.11-default  
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint2006 = **67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

SPECint\_base2006 = **62.8**

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Feb-2014  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	264	37.1	<b>264</b>	<b>37.1</b>	264	37.0	211	46.3	211	46.3	<b>211</b>	<b>46.3</b>
401.bzip2	351	27.5	351	27.5	<b>351</b>	<b>27.5</b>	347	27.8	<b>347</b>	<b>27.8</b>	347	27.8
403.gcc	<b>216</b>	<b>37.3</b>	215	37.4	216	37.3	211	38.2	<b>211</b>	<b>38.2</b>	211	38.1
429.mcf	120	76.1	120	76.2	<b>120</b>	<b>76.2</b>	120	76.1	120	76.2	<b>120</b>	<b>76.2</b>
445.gobmk	368	28.5	367	28.6	<b>368</b>	<b>28.5</b>	332	31.6	332	31.6	<b>332</b>	<b>31.6</b>
456.hammer	<b>134</b>	<b>69.8</b>	134	69.7	133	70.0	<b>133</b>	<b>69.9</b>	133	69.9	136	68.8
458.sjeng	360	33.6	<b>360</b>	<b>33.6</b>	360	33.6	<b>353</b>	<b>34.2</b>	354	34.2	353	34.3
462.libquantum	<b>5.48</b>	<b>3780</b>	5.48	3780	5.48	3780	<b>5.48</b>	<b>3780</b>	5.48	3780	5.48	3780
464.h264ref	400	55.3	<b>400</b>	<b>55.3</b>	401	55.3	<b>329</b>	<b>67.3</b>	329	67.2	328	67.5
471.omnetpp	<b>167</b>	<b>37.3</b>	169	36.9	165	37.9	<b>117</b>	<b>53.2</b>	117	53.4	120	51.9
473.astar	<b>189</b>	<b>37.1</b>	189	37.1	189	37.1	<b>189</b>	<b>37.1</b>	189	37.1	189	37.1
483.xalancbmk	103	67.0	105	65.4	<b>103</b>	<b>66.9</b>	103	67.0	105	65.4	<b>103</b>	<b>66.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Reclaim mode enabled with:
  echo 1 > /proc/sys/vm/zone_reclaim_mode
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
  numactl --localalloc runspec <etc>
```

## Platform Notes

```
BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C1E state
Minimum Processor Idle Power Package State set to Package C6 (retention) State
Energy/Performance Bias is set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x
```

```
Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint2006 = **67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

SPECint\_base2006 = **62.8**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

running on dl380p-gen8-0sb Fri Feb 7 01:39:49 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2667 v2 @ 3.30GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 1 2 3 4 8 9 10 11
  physical 1: cores 1 2 3 4 8 9 10 11
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132130192 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux dl380p-gen8-0sb 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 6 14:39 last=S
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  274G   13G  260G   5% /
```

```
Additional information from dmidecode:
BIOS HP P70 12/20/2013
Memory:
16x HP 712382-071 8 GB 1866 MHz
8x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)  
Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

**SPECint\_base2006 = 62.8**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Platform Notes (Continued)

16x HP 712382-071 8 GB 1866 MHz  
Regarding the sysinfo display about the CPU cores from /proc/cpuinfo, the correct mapping should display as cores 0 through 7. The mapping should read as the following:  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

**SPECint\_base2006 = 62.8**

**CPU2006 license:** 3

**Test date:** Feb-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmarthheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 67.9**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

**SPECint\_base2006 = 62.8**

**CPU2006 license:** 3

**Test date:** Feb-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL380p Gen8  
(3.30 GHz, Intel Xeon E5-2667 v2)

**SPECint2006 = 67.9**

**SPECint\_base2006 = 62.8**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:27:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 March 2014.