



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

SPECfp<sup>®</sup>2006 = 74.2

SPECfp\_base2006 = 73.0

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

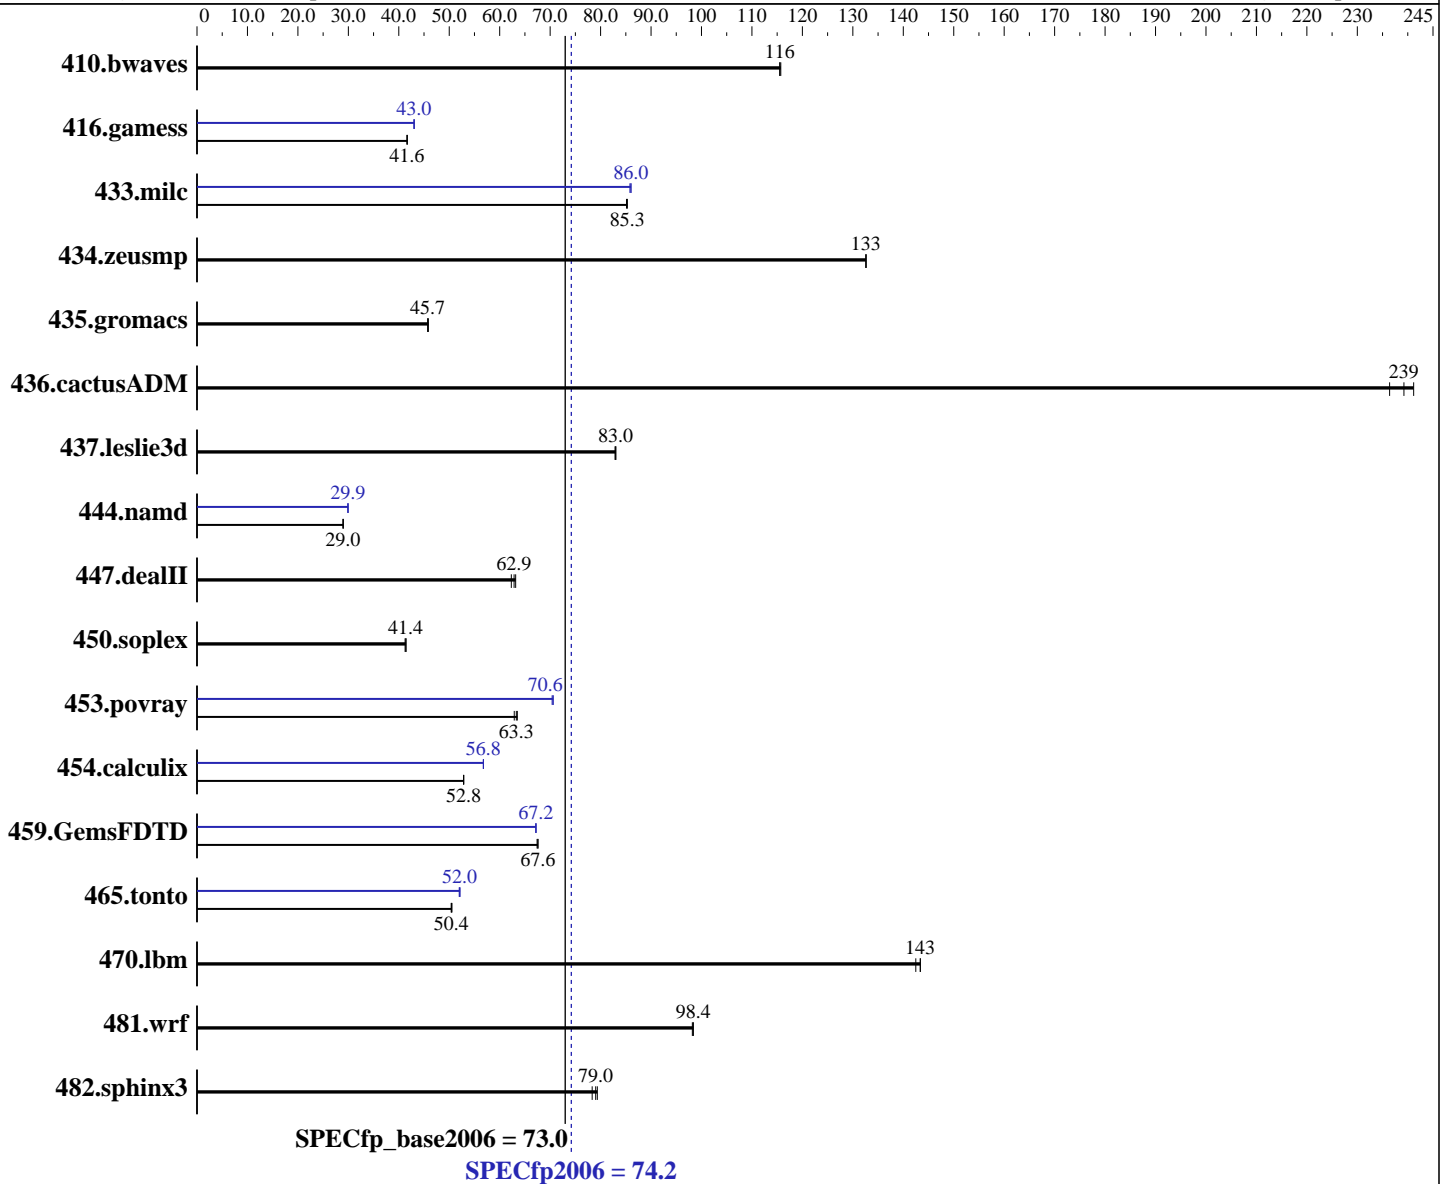

### Hardware

CPU Name: Intel Xeon E3-1230 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

SPECfp2006 = 74.2

SPECfp\_base2006 = 73.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	117	116	118	116	<b>118</b>	<b>116</b>	117	116	118	116	<b>118</b>	<b>116</b>
416.gamess	470	41.7	<b>470</b>	<b>41.6</b>	470	41.6	455	43.1	455	43.0	<b>455</b>	<b>43.0</b>
433.milc	<b>108</b>	<b>85.3</b>	108	85.3	108	85.1	<b>107</b>	<b>86.0</b>	107	85.8	107	86.0
434.zeusmp	68.6	133	<b>68.6</b>	<b>133</b>	68.6	133	68.6	133	<b>68.6</b>	<b>133</b>	68.6	133
435.gromacs	156	45.7	156	45.9	<b>156</b>	<b>45.7</b>	156	45.7	156	45.9	<b>156</b>	<b>45.7</b>
436.cactusADM	49.6	241	<b>50.0</b>	<b>239</b>	50.6	236	49.6	241	<b>50.0</b>	<b>239</b>	50.6	236
437.leslie3d	113	83.0	<b>113</b>	<b>83.0</b>	113	82.9	113	83.0	<b>113</b>	<b>83.0</b>	113	82.9
444.namd	277	29.0	<b>277</b>	<b>29.0</b>	277	29.0	268	29.9	268	29.9	<b>268</b>	<b>29.9</b>
447.dealII	184	62.3	<b>182</b>	<b>62.9</b>	181	63.2	184	62.3	<b>182</b>	<b>62.9</b>	181	63.2
450.soplex	202	41.2	<b>201</b>	<b>41.4</b>	201	41.4	202	41.2	<b>201</b>	<b>41.4</b>	201	41.4
453.povray	84.6	62.9	<b>84.1</b>	<b>63.3</b>	83.8	63.5	<b>75.4</b>	<b>70.6</b>	75.4	70.6	75.6	70.4
454.calculix	156	52.9	156	52.8	<b>156</b>	<b>52.8</b>	<b>145</b>	<b>56.8</b>	145	56.8	145	56.8
459.GemsFDTD	157	67.4	157	67.6	<b>157</b>	<b>67.6</b>	158	67.2	158	67.2	<b>158</b>	<b>67.2</b>
465.tonto	195	50.5	<b>195</b>	<b>50.4</b>	195	50.4	189	52.1	<b>189</b>	<b>52.0</b>	189	52.0
470.lbm	96.4	142	95.8	143	<b>95.8</b>	<b>143</b>	96.4	142	95.8	143	<b>95.8</b>	<b>143</b>
481.wrf	114	98.4	114	98.2	<b>114</b>	<b>98.4</b>	114	98.4	114	98.2	<b>114</b>	<b>98.4</b>
482.sphinx3	<b>247</b>	<b>79.0</b>	246	79.4	249	78.3	<b>247</b>	<b>79.0</b>	246	79.4	249	78.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Hyper-Threading set to Disabled  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3250M5 Sat Mar 15 05:30:00 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 74.2**

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

**SPECfp\_base2006 = 73.0**

**CPU2006 license:** 11

**Test date:** Mar-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1230 v3 @ 3.30GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      16299396 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux x3250M5 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 14 14:59

```

SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3250m5-lv_home
                ext4      852G  17G  792G   3% /home

```

```

Additional information from dmidecode:
BIOS IBM -[JUE109OUS-1.00]- 11/20/2013
Memory:
2x 0000      1600 MHz
2x Micron 18KSF1G72AZ-1G6E1 8 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)  
 "2x 0000 1600 MHz" memory information from dmidecode indicates unused DIMM slots.

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact,1,0"  
 LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

**SPECfp2006 = 74.2**

**SPECfp\_base2006 = 73.0**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

**SPECfp2006 = 74.2**

**SPECfp\_base2006 = 73.0**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

**SPECfp2006 = 74.2**

**SPECfp\_base2006 = 73.0**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M5  
(Intel Xeon E3-1230 v3, 3.30 GHz)

**SPECfp2006 = 74.2**

**SPECfp\_base2006 = 73.0**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Sep 22 17:42:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 April 2014.