



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R820 (Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp<sup>®</sup>\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1100**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2013

Hardware Availability: Mar-2014

Software Availability: Aug-2013

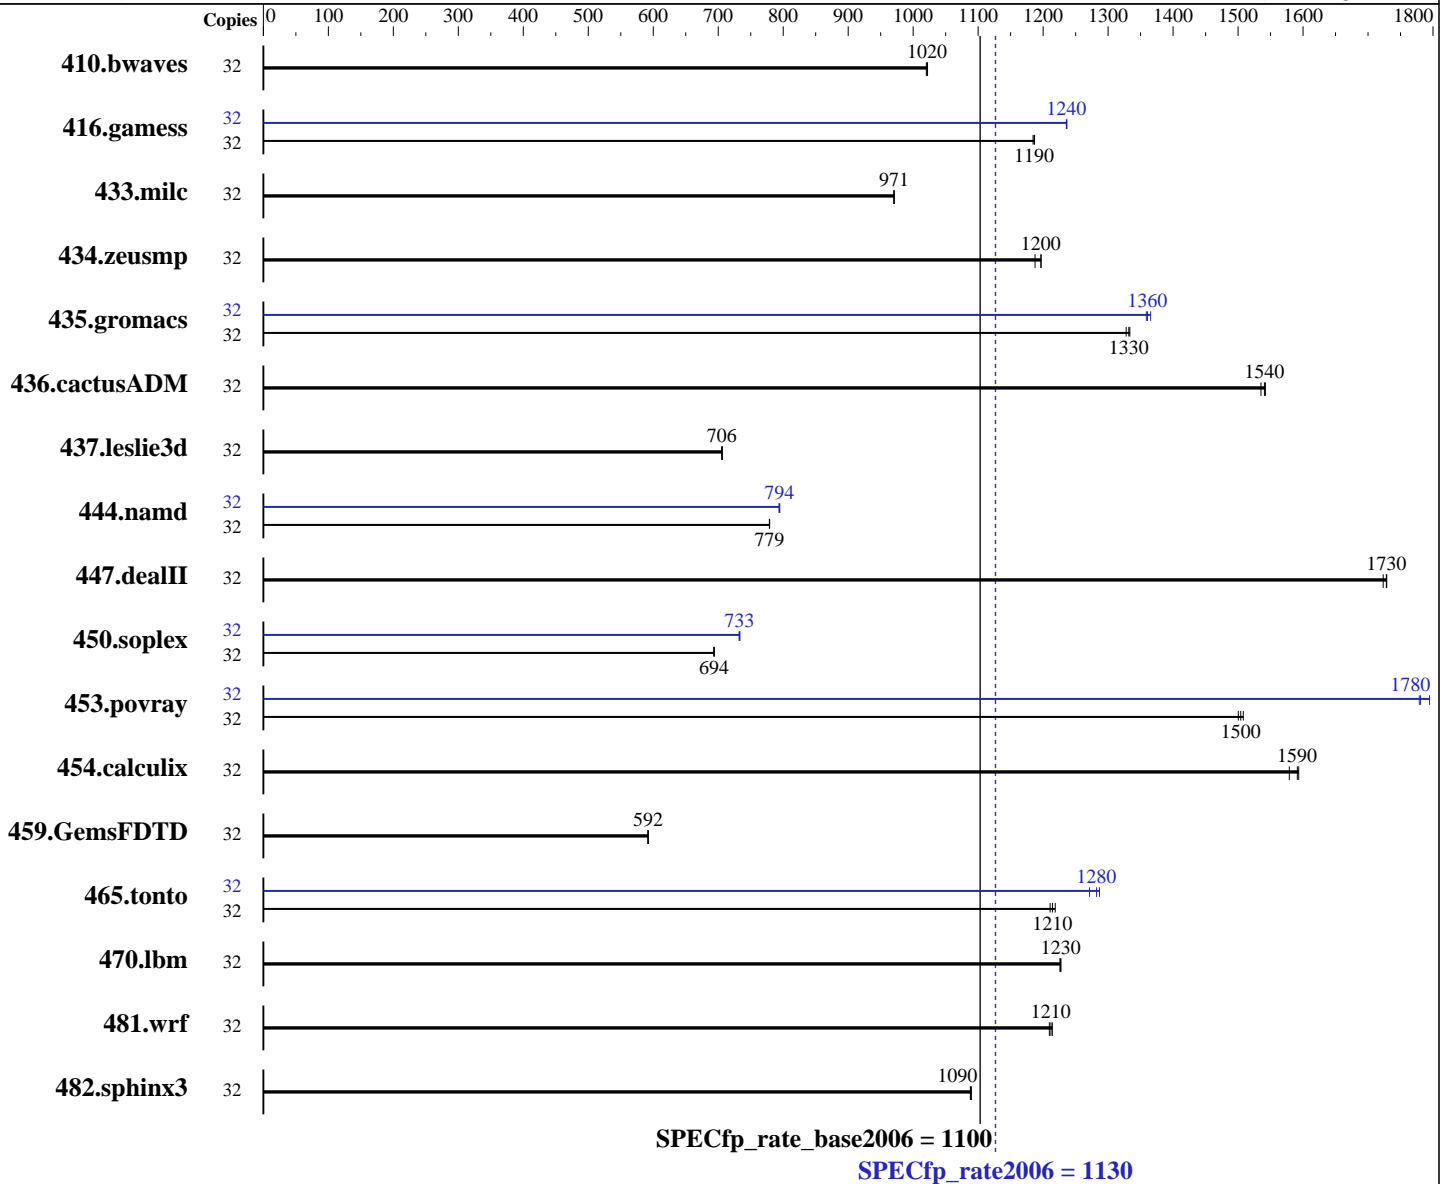

### Hardware

CPU Name: Intel Xeon E5-4627 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp\_rate2006 = 1130

SPECfp\_rate\_base2006 = 1100

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2013

Hardware Availability: Mar-2014

Software Availability: Aug-2013

L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 200 GB SAS SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	425	1020	426	1020	<b>426</b>	<b>1020</b>	32	425	1020	426	1020	<b>426</b>	<b>1020</b>
416.gamess	32	<b>528</b>	<b>1190</b>	529	1180	528	1190	32	507	1240	<b>507</b>	<b>1240</b>	507	1240
433.milc	32	303	971	303	970	<b>303</b>	<b>971</b>	32	303	971	303	970	<b>303</b>	<b>971</b>
434.zeusmp	32	245	1190	243	1200	<b>243</b>	<b>1200</b>	32	245	1190	243	1200	<b>243</b>	<b>1200</b>
435.gromacs	32	172	1330	171	1330	<b>172</b>	<b>1330</b>	32	<b>168</b>	<b>1360</b>	168	1360	167	1370
436.cactusADM	32	248	1540	<b>248</b>	<b>1540</b>	249	1540	32	248	1540	<b>248</b>	<b>1540</b>	249	1540
437.leslie3d	32	426	706	<b>426</b>	<b>706</b>	426	706	32	426	706	<b>426</b>	<b>706</b>	426	706
444.namd	32	329	779	330	779	<b>329</b>	<b>779</b>	32	<b>323</b>	<b>794</b>	323	795	323	793
447.dealII	32	212	1730	212	1720	<b>212</b>	<b>1730</b>	32	212	1730	212	1720	<b>212</b>	<b>1730</b>
450.soplex	32	<b>385</b>	<b>694</b>	385	693	385	694	32	364	732	364	733	<b>364</b>	<b>733</b>
453.povray	32	113	1510	113	1500	<b>113</b>	<b>1500</b>	32	95.7	1780	94.9	1790	<b>95.6</b>	<b>1780</b>
454.calculix	32	166	1590	<b>166</b>	<b>1590</b>	167	1580	32	166	1590	<b>166</b>	<b>1590</b>	167	1580
459.GemsFDTD	32	<b>574</b>	<b>592</b>	573	592	574	592	32	<b>574</b>	<b>592</b>	573	592	574	592
465.tonto	32	<b>259</b>	<b>1210</b>	258	1220	260	1210	32	248	1270	245	1290	<b>246</b>	<b>1280</b>
470.lbm	32	<b>358</b>	<b>1230</b>	359	1230	358	1230	32	<b>358</b>	<b>1230</b>	359	1230	358	1230
481.wrf	32	296	1210	<b>295</b>	<b>1210</b>	294	1210	32	296	1210	<b>295</b>	<b>1210</b>	294	1210
482.sphinx3	32	<b>573</b>	<b>1090</b>	572	1090	573	1090	32	<b>573</b>	<b>1090</b>	572	1090	573	1090

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1130**

PowerEdge R820 (Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate\_base2006 = 1100**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

System Profile set to Performance  
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux Thu Oct 17 18:28:16 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal: 529392212 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 17 12:16 last=S
```

```
SPEC is set to: /root/cpu2006.1.2.ic13
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext2 175G 40G 135G 23% /
```

Additional information from dmidecode:

BIOS Dell Inc. 2.0.17 10/01/2013

Memory:

32x 00AD00B300AD HMT42GR7AFR4C-RD 16 GB 1866 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1130**

PowerEdge R820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp\_rate\_base2006 = 1100**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1130**

PowerEdge R820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp\_rate\_base2006 = 1100**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1130**

PowerEdge R820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp\_rate\_base2006 = 1100**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 1130**

PowerEdge R820 (Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate\_base2006 = 1100**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:44:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 April 2014.