



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp<sup>®</sup>\_rate2006 = 426

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

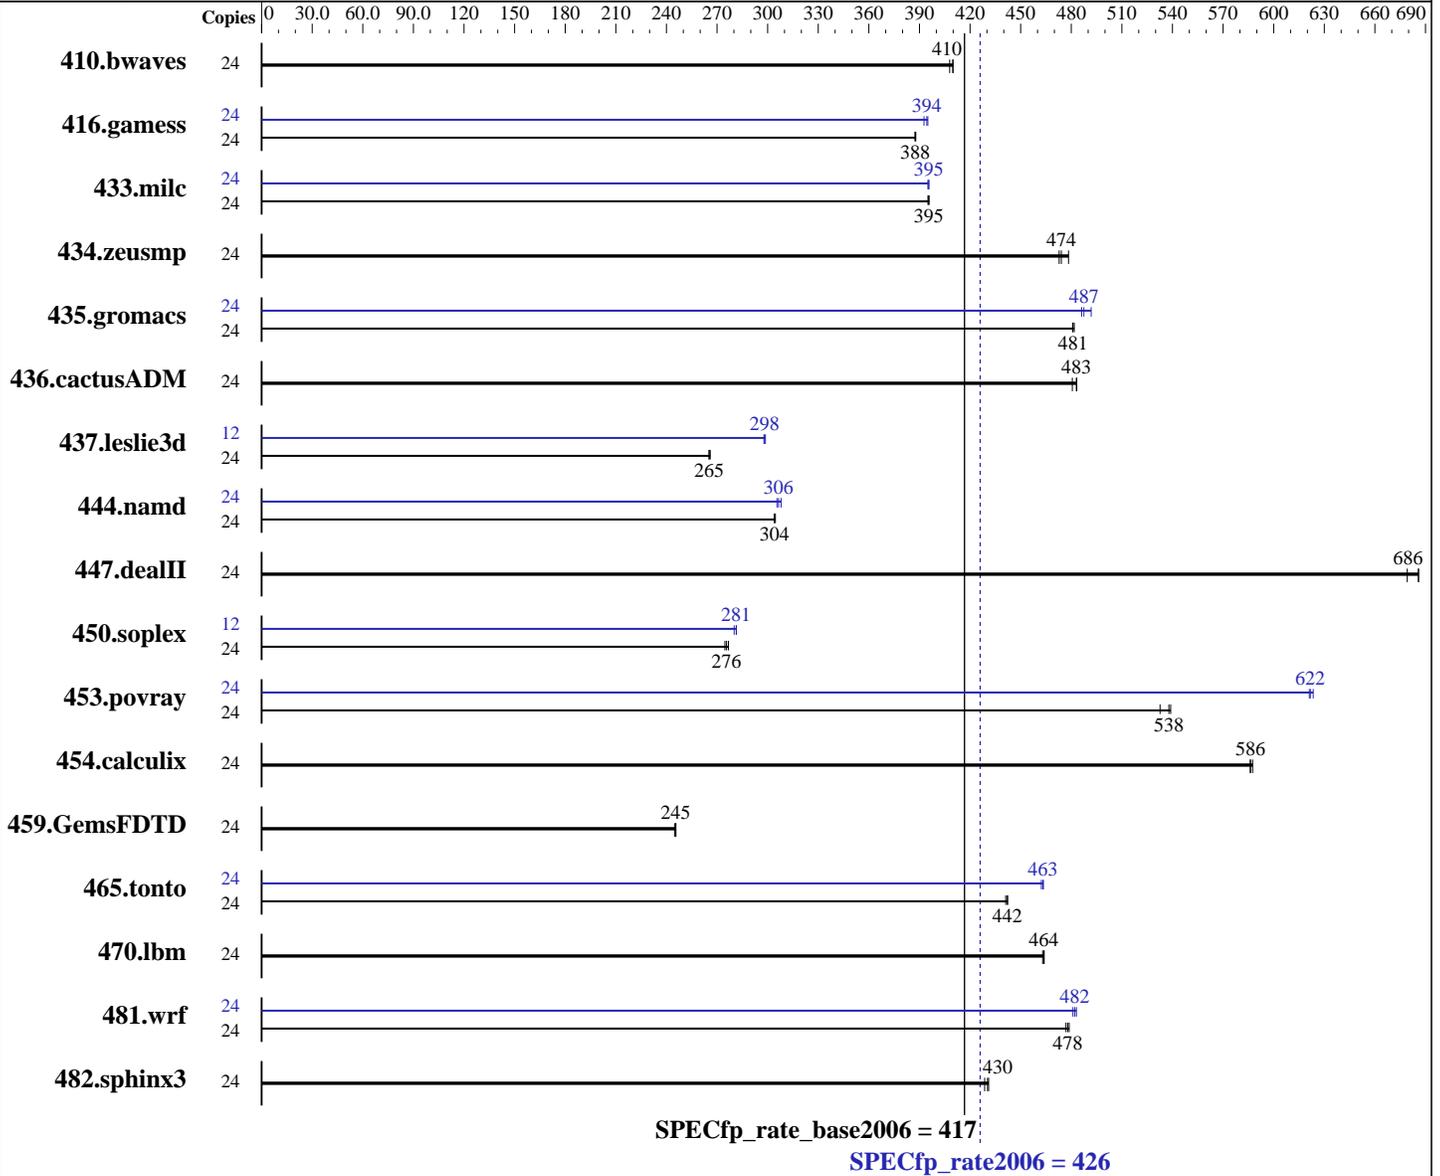

**Hardware**

CPU Name: Intel Xeon E5-2630 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate2006 = 426

SPECfp\_rate\_base2006 = 417

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Apr-2014  
Hardware Availability: Nov-2013  
Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)  
Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	796	410	<b>796</b>	<b>410</b>	800	408	24	796	410	<b>796</b>	<b>410</b>	800	408
416.gamess	24	<b>1213</b>	<b>388</b>	1213	387	1212	388	24	1197	393	1190	395	<b>1192</b>	<b>394</b>
433.milc	24	<b>557</b>	<b>395</b>	557	396	558	395	24	558	395	557	396	<b>557</b>	<b>395</b>
434.zeusmp	24	462	473	457	478	<b>461</b>	<b>474</b>	24	462	473	457	478	<b>461</b>	<b>474</b>
435.gromacs	24	<b>356</b>	<b>481</b>	356	482	356	481	24	352	486	348	492	<b>352</b>	<b>487</b>
436.cactusADM	24	597	481	593	483	<b>594</b>	<b>483</b>	24	597	481	593	483	<b>594</b>	<b>483</b>
437.leslie3d	24	<b>850</b>	<b>265</b>	851	265	848	266	12	379	298	378	299	<b>378</b>	<b>298</b>
444.namd	24	633	304	<b>633</b>	<b>304</b>	632	305	24	<b>628</b>	<b>306</b>	630	306	625	308
447.dealII	24	400	686	<b>400</b>	<b>686</b>	404	679	24	400	686	<b>400</b>	<b>686</b>	404	679
450.soplex	24	<b>726</b>	<b>276</b>	723	277	729	275	12	356	282	357	280	<b>356</b>	<b>281</b>
453.povray	24	<b>237</b>	<b>538</b>	240	533	237	539	24	205	623	<b>205</b>	<b>622</b>	206	621
454.calculix	24	337	588	<b>338</b>	<b>586</b>	338	586	24	337	588	<b>338</b>	<b>586</b>	338	586
459.GemsFDTD	24	1037	246	<b>1037</b>	<b>245</b>	1040	245	24	1037	246	<b>1037</b>	<b>245</b>	1040	245
465.tonto	24	<b>534</b>	<b>442</b>	534	442	535	441	24	511	462	<b>510</b>	<b>463</b>	510	463
470.lbm	24	712	463	<b>711</b>	<b>464</b>	711	464	24	712	463	<b>711</b>	<b>464</b>	711	464
481.wrf	24	<b>561</b>	<b>478</b>	562	477	560	479	24	555	483	557	481	<b>556</b>	<b>482</b>
482.sphinx3	24	1091	429	<b>1087</b>	<b>430</b>	1085	431	24	1091	429	<b>1087</b>	<b>430</b>	1085	431

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate2006 = 426

SPECfp\_rate\_base2006 = 417

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Apr-2014  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

### Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on nx360M4 Wed Apr 9 02:49:22 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 6
  siblings      : 12
  physical 0:   cores 0 1 2 3 4 5
  physical 1:   cores 0 1 2 3 4 5
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132089152 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 8 14:44
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_nx360m4-lv_home
ext4            403G    27G  357G   7% /home
```

```
Additional information from dmidecode:
BIOS IBM -[FHE105GUS-1.00]- 08/23/2013
Memory:
8x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_rate2006 = 426**

**SPECfp\_rate\_base2006 = 417**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Apr-2014  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_rate2006 = 426**

**SPECfp\_rate\_base2006 = 417**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2014

**Hardware Availability:** Nov-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_rate2006 = 426**

**SPECfp\_rate\_base2006 = 417**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2014

**Hardware Availability:** Nov-2013

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM NeXtScale nx360 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_rate2006 = 426**

**SPECfp\_rate\_base2006 = 417**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Apr-2014  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:21:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 May 2014.