



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Huawei RH1288 v2

SPECfp[®]2006 = 48.3

SPECfp_base2006 = 47.2

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

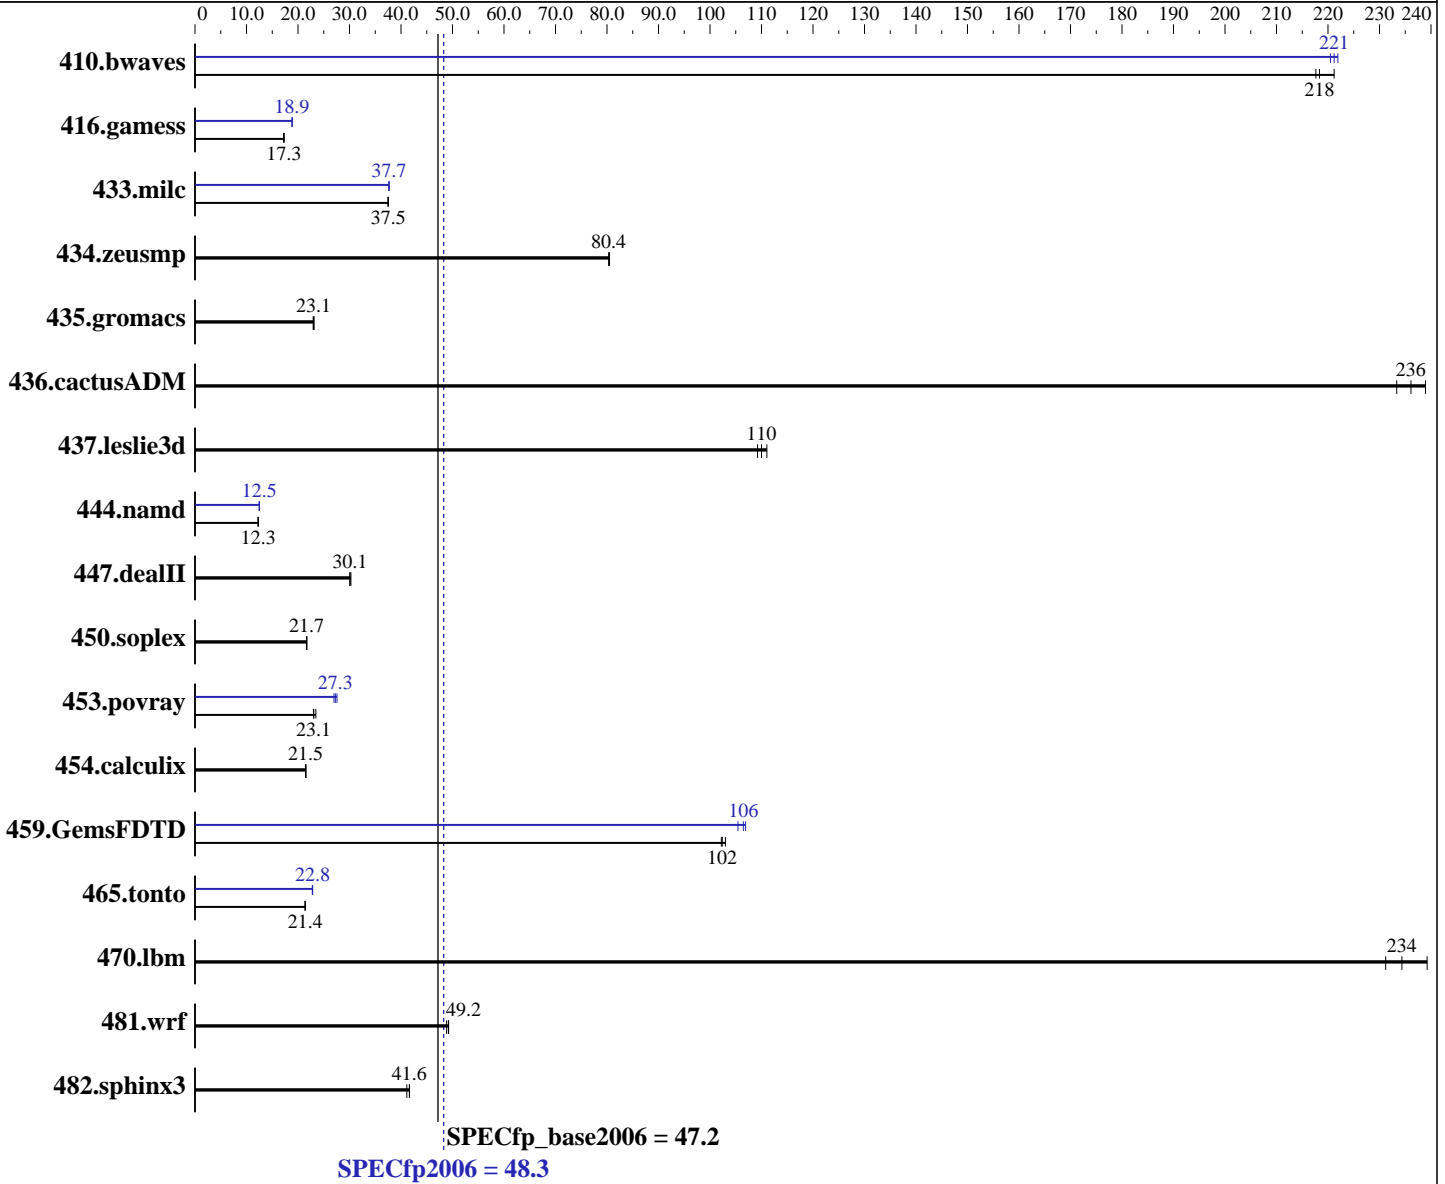

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 v2

SPECfp2006 = 48.3

SPECfp_base2006 = 47.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-09, ECC)
 Disk Subsystem: 1 X 300 GB SAS 7200RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>62.2</u>	<u>218</u>	61.4	221	62.4	218	61.2	222	<u>61.4</u>	<u>221</u>	61.6	220
416.gamess	1132	17.3	<u>1132</u>	<u>17.3</u>	1138	17.2	<u>1038</u>	<u>18.9</u>	1038	18.9	1038	18.9
433.milc	245	37.5	245	37.5	<u>245</u>	<u>37.5</u>	244	37.7	<u>244</u>	<u>37.7</u>	244	37.7
434.zeusmp	<u>113</u>	<u>80.4</u>	113	80.4	113	80.5	<u>113</u>	<u>80.4</u>	113	80.4	113	80.5
435.gromacs	311	22.9	<u>310</u>	<u>23.1</u>	309	23.1	311	22.9	<u>310</u>	<u>23.1</u>	309	23.1
436.cactusADM	51.2	233	<u>50.6</u>	<u>236</u>	50.0	239	51.2	233	<u>50.6</u>	<u>236</u>	50.0	239
437.leslie3d	86.1	109	84.7	111	<u>85.5</u>	<u>110</u>	86.1	109	84.7	111	<u>85.5</u>	<u>110</u>
444.namd	654	12.3	653	12.3	<u>654</u>	<u>12.3</u>	642	12.5	642	12.5	<u>642</u>	<u>12.5</u>
447.dealII	380	30.1	<u>380</u>	<u>30.1</u>	378	30.3	380	30.1	<u>380</u>	<u>30.1</u>	378	30.3
450.soplex	384	21.7	<u>384</u>	<u>21.7</u>	385	21.7	384	21.7	<u>384</u>	<u>21.7</u>	385	21.7
453.povray	231	23.0	<u>231</u>	<u>23.1</u>	227	23.5	193	27.6	197	27.0	<u>195</u>	<u>27.3</u>
454.calculix	<u>384</u>	<u>21.5</u>	384	21.5	383	21.5	<u>384</u>	<u>21.5</u>	384	21.5	383	21.5
459.GemsFDTD	<u>104</u>	<u>102</u>	103	103	104	102	101	105	<u>99.6</u>	<u>106</u>	99.2	107
465.tonto	459	21.4	461	21.4	<u>460</u>	<u>21.4</u>	432	22.8	<u>431</u>	<u>22.8</u>	431	22.9
470.lbm	57.4	239	<u>58.6</u>	<u>234</u>	59.4	231	57.4	239	<u>58.6</u>	<u>234</u>	59.4	231
481.wrf	229	48.9	<u>227</u>	<u>49.2</u>	227	49.2	229	48.9	<u>227</u>	<u>49.2</u>	227	49.2
482.sphinx3	468	41.7	<u>468</u>	<u>41.6</u>	474	41.1	468	41.7	<u>468</u>	<u>41.6</u>	474	41.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Performance
 Sysinfo program /spec/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on huawei Tue May 13 21:01:47 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.3
Huawei RH1288 v2	SPECfp_base2006 =	47.2

CPU2006 license: 3175	Test date: May-2014
Test sponsor: Huawei	Hardware Availability: Jan-2012
Tested by: Huawei	Software Availability: Nov-2013

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
    2 "physical id"s (chips)
    8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
  cache size : 10240 KB

From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
  x86_64 x86_64 GNU/Linux

run-level 3 May 5 11:28

SPEC is set to: /spec
  Filesystem      Type      Size      Used Avail Use% Mounted on
  /dev/sdal       ext4     193G      80G   104G  44% /

Additional information from dmidecode:
Memory:
  11x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank
  5x Samsung M393B1K70DH0-CH9 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "8"

```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.3
Huawei RH1288 v2	SPECfp_base2006 =	47.2

CPU2006 license: 3175	Test date: May-2014
Test sponsor: Huawei	Hardware Availability: Jan-2012
Tested by: Huawei	Software Availability: Nov-2013

General Notes (Continued)

using RHEL 6.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

C++ benchmarks:
 -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.3
Huawei RH1288 v2	SPECfp_base2006 =	47.2

CPU2006 license: 3175	Test date: May-2014
Test sponsor: Huawei	Hardware Availability: Jan-2012
Tested by: Huawei	Software Availability: Nov-2013

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.3
Huawei RH1288 v2	SPECfp_base2006 =	47.2

CPU2006 license: 3175	Test date: May-2014
Test sponsor: Huawei	Hardware Availability: Jan-2012
Tested by: Huawei	Software Availability: Nov-2013

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	48.3
Huawei RH1288 v2	SPECfp_base2006 =	47.2

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:59:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 June 2014.