



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

**SPECfp<sup>®</sup>2006 = 59.8**

**SPECfp\_base2006 = 56.0**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Apr-2014

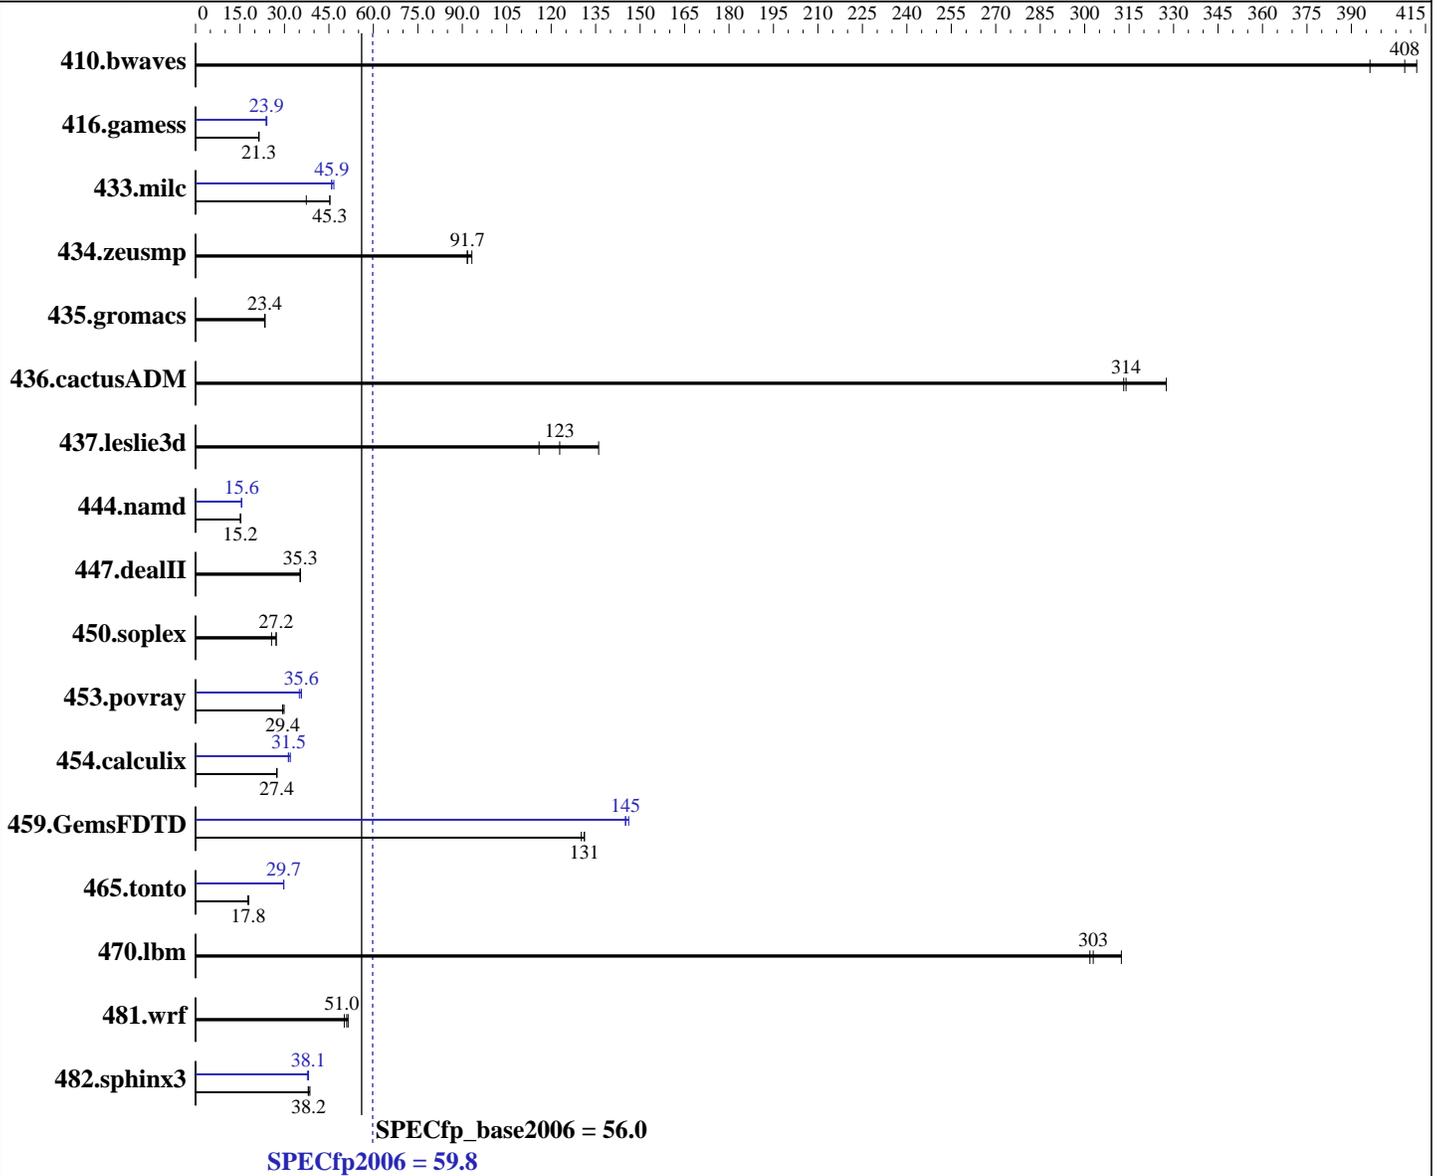

### Hardware

CPU Name: Intel Xeon E5-4603 v2  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

SPECfp2006 = **59.8**

SPECfp\_base2006 = **56.0**

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Apr-2014

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	34.3	396	33.0	412	<b>33.3</b>	<b>408</b>	34.3	396	33.0	412	<b>33.3</b>	<b>408</b>
416.gamess	913	21.5	<b>918</b>	<b>21.3</b>	919	21.3	<b>818</b>	<b>23.9</b>	814	24.1	823	23.8
433.milc	246	37.4	202	45.3	<b>203</b>	<b>45.3</b>	<b>200</b>	<b>45.9</b>	197	46.7	200	45.9
434.zeusmp	97.6	93.2	99.2	91.7	<b>99.2</b>	<b>91.7</b>	97.6	93.2	99.2	91.7	<b>99.2</b>	<b>91.7</b>
435.gromacs	<b>305</b>	<b>23.4</b>	305	23.4	306	23.3	<b>305</b>	<b>23.4</b>	305	23.4	306	23.3
436.cactusADM	36.5	328	<b>38.1</b>	<b>314</b>	38.2	313	36.5	328	<b>38.1</b>	<b>314</b>	38.2	313
437.leslie3d	81.1	116	<b>76.5</b>	<b>123</b>	69.1	136	81.1	116	<b>76.5</b>	<b>123</b>	69.1	136
444.namd	527	15.2	<b>529</b>	<b>15.2</b>	530	15.1	<b>516</b>	<b>15.6</b>	515	15.6	518	15.5
447.dealII	324	35.3	<b>324</b>	<b>35.3</b>	324	35.3	324	35.3	<b>324</b>	<b>35.3</b>	324	35.3
450.soplex	<b>307</b>	<b>27.2</b>	325	25.6	306	27.2	<b>307</b>	<b>27.2</b>	325	25.6	306	27.2
453.povray	<b>181</b>	<b>29.4</b>	181	29.4	178	29.9	152	35.0	149	35.7	<b>149</b>	<b>35.6</b>
454.calculix	301	27.4	301	27.5	<b>301</b>	<b>27.4</b>	258	32.0	<b>262</b>	<b>31.5</b>	264	31.3
459.GemsFDTD	81.5	130	80.9	131	<b>80.9</b>	<b>131</b>	73.2	145	<b>73.1</b>	<b>145</b>	72.6	146
465.tonto	557	17.7	<b>551</b>	<b>17.8</b>	550	17.9	331	29.7	<b>331</b>	<b>29.7</b>	330	29.8
470.lbm	44.0	312	45.5	302	<b>45.4</b>	<b>303</b>	44.0	312	45.5	302	<b>45.4</b>	<b>303</b>
481.wrf	217	51.5	<b>219</b>	<b>51.0</b>	223	50.2	217	51.5	<b>219</b>	<b>51.0</b>	223	50.2
482.sphinx3	505	38.6	513	38.0	<b>511</b>	<b>38.2</b>	<b>512</b>	<b>38.1</b>	517	37.7	511	38.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Intel HT Technology = Enabled  
CPU performance set to HPC  
Power Technology set to Custom  
CPU Power State C6 set to Disabled  
CPU Power State C1 Enhanced set to Disabled  
Memory RAS configuration set to Maximum Performance  
DRAM Clock Throttling Set to Performance  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

SPECfp2006 = 59.8

SPECfp\_base2006 = 56.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Apr-2014

### Platform Notes (Continued)

running on rhel6.4 Sun Jun 8 21:14:52 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-4603 v2 @ 2.20GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 4
  siblings     : 8
  physical 0   : cores 0 1 2 3
  physical 1   : cores 0 1 2 3
  physical 2   : cores 0 1 2 3
  physical 3   : cores 0 1 2 3
cache size     : 10240 KB

```

```

From /proc/meminfo
MemTotal:      264501936 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux rhel6.4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 8 21:09

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      275G  41G  220G  16% /

```

```

Additional information from dmidecode:
BIOS Cisco Systems, Inc. B420M3.2.2.1.8.042120142113 04/21/2014
Memory:
 32x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1333 MHz 2 rank
 16x NO DIMM NO DIMM

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

**SPECfp2006 = 59.8**

**SPECfp\_base2006 = 56.0**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Apr-2014

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

**SPECfp2006 = 59.8**

**SPECfp\_base2006 = 56.0**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Apr-2014

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

**SPECfp2006 = 59.8**

**SPECfp\_base2006 = 56.0**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Apr-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Cisco Systems**

Cisco UCS B420 M3 (Intel Xeon E5-4603 v2, 2.20 GHz)

**SPECfp2006 = 59.8**

**SPECfp\_base2006 = 56.0**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Apr-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:16:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 July 2014.