



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2407 v2, 2.40 GHz)

**SPECint®2006 = 38.1**

**SPECint\_base2006 = 36.2**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Sep-2013

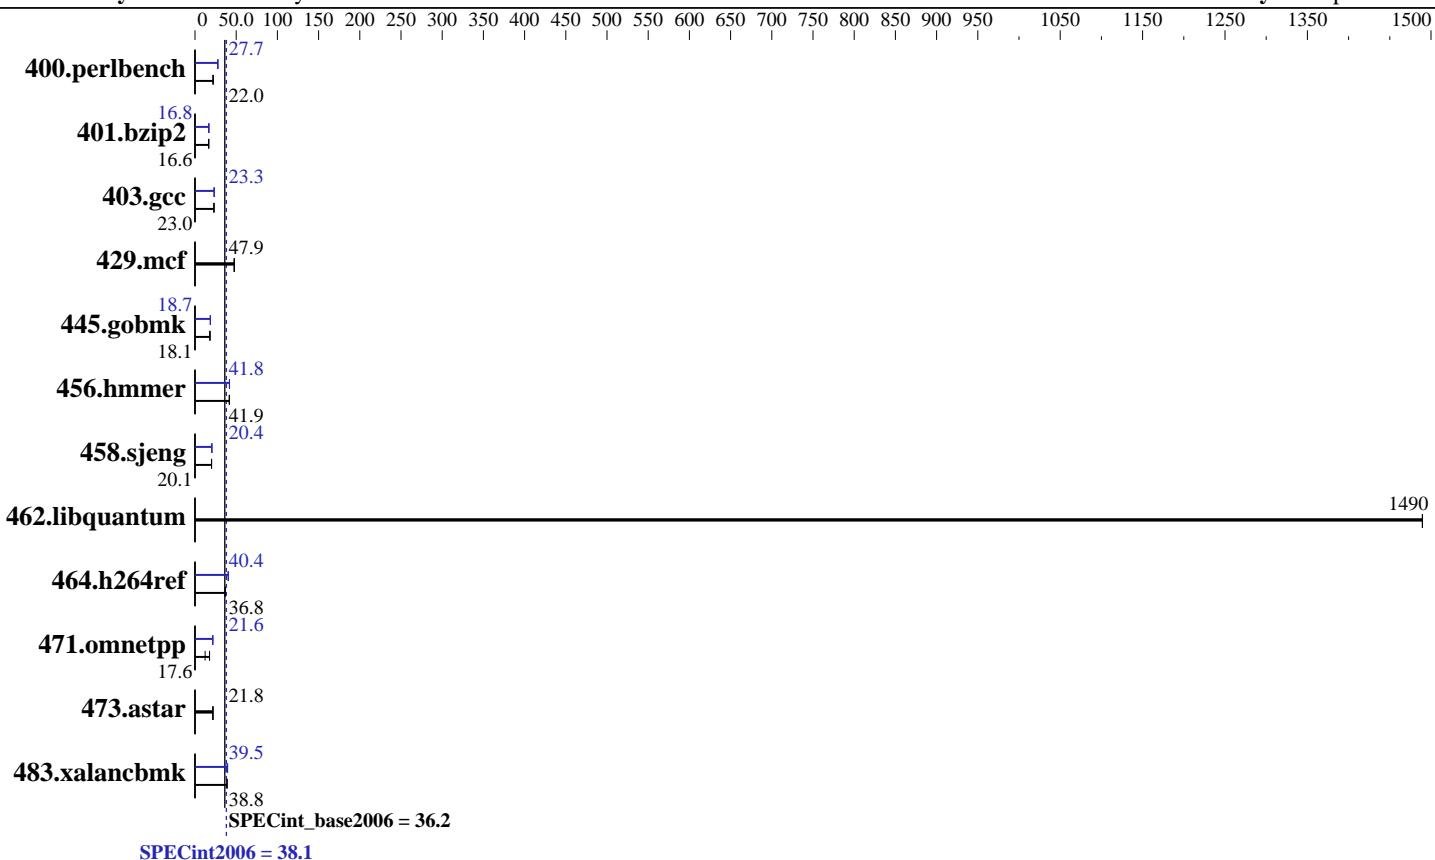

### Hardware

CPU Name:	Intel Xeon E5-2407 v2
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 X 146 GB 15000 RPM SAS
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2407 v2, 2.40 GHz)

**SPECint2006 = 38.1**

**SPECint\_base2006 = 36.2**

**CPU2006 license:** 9019

**Test date:** Jul-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2014

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	447	21.8	443	22.1	<b>444</b>	<b>22.0</b>	<b>352</b>	<b>27.7</b>	353	27.7	352	27.8
401.bzip2	580	16.6	<b>580</b>	<b>16.6</b>	580	16.6	<b>575</b>	<b>16.8</b>	<b>574</b>	<b>16.8</b>	<b>575</b>	<b>16.8</b>
403.gcc	349	23.1	351	22.9	<b>349</b>	<b>23.0</b>	348	23.1	<b>345</b>	<b>23.3</b>	345	23.3
429.mcf	193	47.2	<b>190</b>	<b>47.9</b>	190	47.9	<b>193</b>	<b>47.2</b>	<b>190</b>	<b>47.9</b>	190	47.9
445.gobmk	<b>579</b>	<b>18.1</b>	579	18.1	579	18.1	<b>562</b>	<b>18.7</b>	562	18.7	564	18.6
456.hmmer	<b>223</b>	<b>41.9</b>	225	41.4	223	41.9	<b>223</b>	<b>41.8</b>	222	41.9	224	41.7
458.sjeng	602	20.1	<b>602</b>	<b>20.1</b>	602	20.1	<b>592</b>	<b>20.4</b>	592	20.4	592	20.4
462.libquantum	<b>13.9</b>	<b>1490</b>	13.9	1490	13.9	1490	<b>13.9</b>	<b>1490</b>	13.9	1490	13.9	1490
464.h264ref	603	36.7	601	36.8	<b>602</b>	<b>36.8</b>	547	40.5	549	40.3	<b>548</b>	<b>40.4</b>
471.omnetpp	354	17.7	<b>354</b>	<b>17.6</b>	510	12.3	290	21.6	289	21.6	<b>290</b>	<b>21.6</b>
473.astar	322	21.8	324	21.7	<b>322</b>	<b>21.8</b>	322	21.8	324	21.7	<b>322</b>	<b>21.8</b>
483.xalancbmk	178	38.8	<b>178</b>	<b>38.8</b>	178	38.9	<b>175</b>	<b>39.5</b>	174	39.6	183	37.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to HPC  
 Power Technology set to Custom  
 CPU Power State C6 set to Disabled  
 CPU Power State C1 Enhanced set to Disabled  
 Memory RAS configuration set to Maximum Performance  
 DRAM Clock Throttling Set to Performance  
 Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on B22M3 Sat Jul 5 05:41:04 2014  
This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>  
From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2407 v2 @ 2.40GHz  
2 "physical id"s (chips)  
8 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
following excerpts from /proc/cpuinfo might not be reliable. Use with  
caution.)  
cpu cores : 4  
siblings : 4  
physical 0: cores 0 1 2 3  
physical 1: cores 0 1 2 3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2407 v2, 2.40 GHz)

**SPECint2006 = 38.1**

**SPECint\_base2006 = 36.2**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
cache size : 10240 KB
From /proc/meminfo
    MemTotal:      99008224 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
uname -a:
    Linux B22M3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
    x86_64 x86_64 GNU/Linux
run-level 3 Jul 4 22:17
SPEC is set to: /opt/cpu2006-1.4
    Filesystem      Type  Size  Used  Avail Use% Mounted on
    /dev/sdal      ext4  134G   21G  107G  17% /
Additional information from dmidecode:
    BIOS Cisco Systems, Inc. B22M3.2.2.1.8.042120141915 04/21/2014
    Memory:
        12x 0xCE00 M393B1K70DH0-YK0 8 GB 1333 MHz 2 rank
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted\_by: "Sheshgiri I (shei)" <shei@cisco.com>

Submitted: Wed Sep 17 01:52:38 EDT 2014

Submission: cpu2006-20140903-31188.sub

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECint2006 =</b>	<b>38.1</b>
	<b>SPECint_base2006 =</b>	<b>36.2</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Jul-2014
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Jun-2014
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2013

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hammer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Cisco Systems</b>	<b>SPECint2006 =</b>	<b>38.1</b>
Cisco UCS B22 M3 (Intel Xeon E5-2407 v2, 2.40 GHz)	<b>SPECint_base2006 =</b>	<b>36.2</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Jul-2014
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Jun-2014
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2013

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
   403.gcc: -DSPEC_CPU_LP64
   429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
   473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-ra-region-strategy=block -ansi-alias
               -Wl,-z,muldefs -L/sh -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2407 v2, 2.40 GHz)

**SPECint2006 = 38.1**

**SPECint\_base2006 = 36.2**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:18:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.