



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp®2006 = 106**

**SPECfp\_base2006 = 101**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

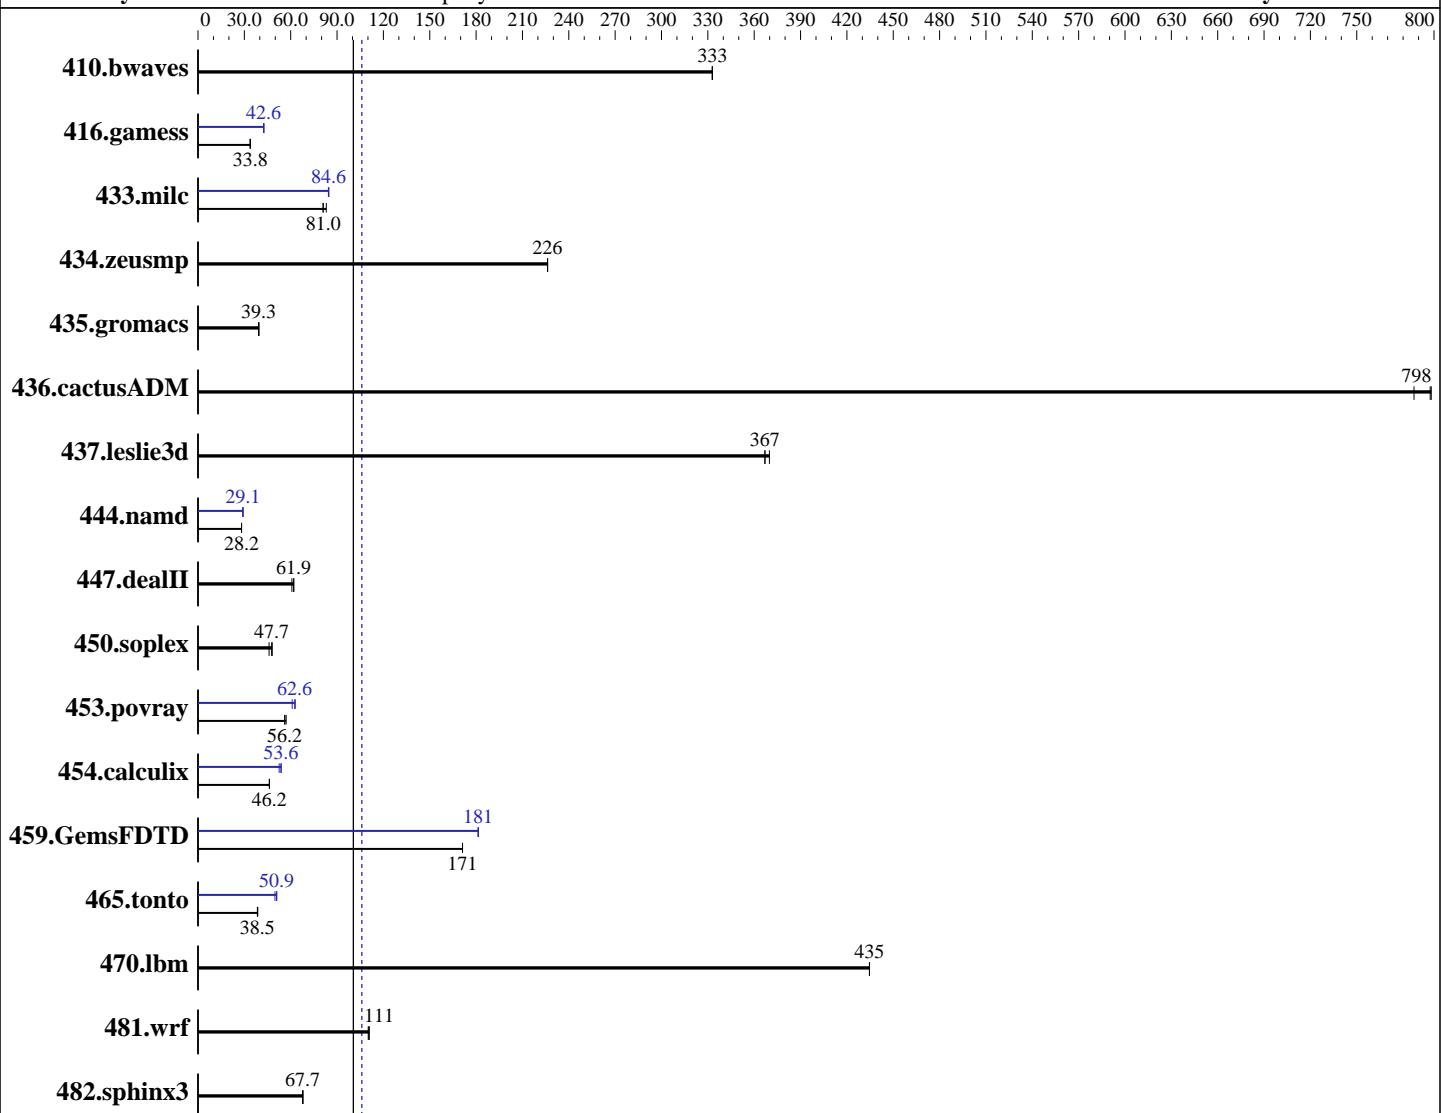

**SPECfp\_base2006 = 101**

**SPECfp2006 = 106**

### Hardware

CPU Name: Intel Xeon E5-2699 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 18 cores, 1 chip, 18 cores/chip  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: Kernel 3.10.0-123.el7.x86\_64  
Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
File System: Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
xfs

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 = 106**

**SPECfp\_base2006 = 101**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Aug-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>40.8</b>	<b>333</b>	40.8	333	40.8	333	<b>40.8</b>	<b>333</b>	40.8	333	40.8	333
416.gamess	<b>579</b>	<b>33.8</b>	580	33.8	578	33.9	<b>462</b>	<b>42.4</b>	<b>460</b>	<b>42.6</b>	459	42.7
433.milc	113	81.0	111	83.0	<b>113</b>	<b>81.0</b>	<b>109</b>	<b>84.6</b>	109	84.4	108	84.6
434.zeusmp	40.2	226	40.2	226	<b>40.2</b>	<b>226</b>	40.2	226	40.2	226	<b>40.2</b>	<b>226</b>
435.gromacs	<b>182</b>	<b>39.3</b>	181	39.4	182	39.3	<b>182</b>	<b>39.3</b>	181	39.4	182	39.3
436.cactusADM	<b>15.0</b>	<b>798</b>	15.2	787	15.0	798	<b>15.0</b>	<b>798</b>	15.2	787	15.0	798
437.leslie3d	25.4	370	25.6	367	<b>25.6</b>	<b>367</b>	25.4	370	25.6	367	<b>25.6</b>	<b>367</b>
444.namd	285	28.2	284	28.2	<b>284</b>	<b>28.2</b>	275	29.1	276	29.1	<b>276</b>	<b>29.1</b>
447.dealII	188	60.8	<b>185</b>	<b>61.9</b>	184	62.0	188	60.8	<b>185</b>	<b>61.9</b>	184	62.0
450.soplex	181	46.0	174	48.0	<b>175</b>	<b>47.7</b>	181	46.0	174	48.0	<b>175</b>	<b>47.7</b>
453.povray	<b>94.7</b>	<b>56.2</b>	94.8	56.1	93.3	57.1	84.5	62.9	<b>85.0</b>	<b>62.6</b>	87.3	61.0
454.calculix	<b>179</b>	<b>46.2</b>	179	46.2	178	46.3	157	52.5	153	53.9	<b>154</b>	<b>53.6</b>
459.GemsFDTD	<b>62.0</b>	<b>171</b>	62.0	171	62.0	171	<b>58.5</b>	181	<b>58.5</b>	181	<b>58.5</b>	<b>181</b>
465.tonto	256	38.5	254	38.7	<b>256</b>	<b>38.5</b>	197	49.8	<b>193</b>	<b>50.9</b>	193	50.9
470.lbm	<b>31.6</b>	<b>435</b>	31.6	435	31.6	435	<b>31.6</b>	<b>435</b>	31.6	435	31.6	435
481.wrf	<b>101</b>	<b>111</b>	101	110	101	111	<b>101</b>	<b>111</b>	101	110	101	111
482.sphinx3	<b>288</b>	<b>67.7</b>	288	67.7	287	68.0	<b>288</b>	<b>67.7</b>	288	67.7	287	68.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

HP Power Profile set to Maximum Performance

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Home Snoop

Processor Power and Utilization Monitoring set to Disabled

Memory Patrol Scrubbing set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 =**

**106**

**SPECfp\_base2006 =**

**101**

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

## Platform Notes (Continued)

Memory Refresh Rate set to 1x Refresh

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on localhost.localdomain Fri Aug  8 18:56:59 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
        1 "physical id"s (chips)
        18 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 18
        siblings : 18
        physical 0: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      131734548 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May  5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 8 18:17

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   318G  4.1G  314G   2% /home
```

Additional information from dmidecode:  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 =**

**106**

**SPECfp\_base2006 =**

**101**

**CPU2006 license:** 3

**Test date:**

Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:**

Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:**

Jun-2014

## Platform Notes (Continued)

BIOS HP P89 07/11/2014

Memory:

8x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank  
16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:  
8x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "18"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 =**

**106**

**SPECfp\_base2006 =**

**101**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:**

Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Base Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 =**

**106**

**SPECfp\_base2006 =**

**101**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:**

Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECfp2006 =** 106

**SPECfp\_base2006 =** 101

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:18:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.