



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

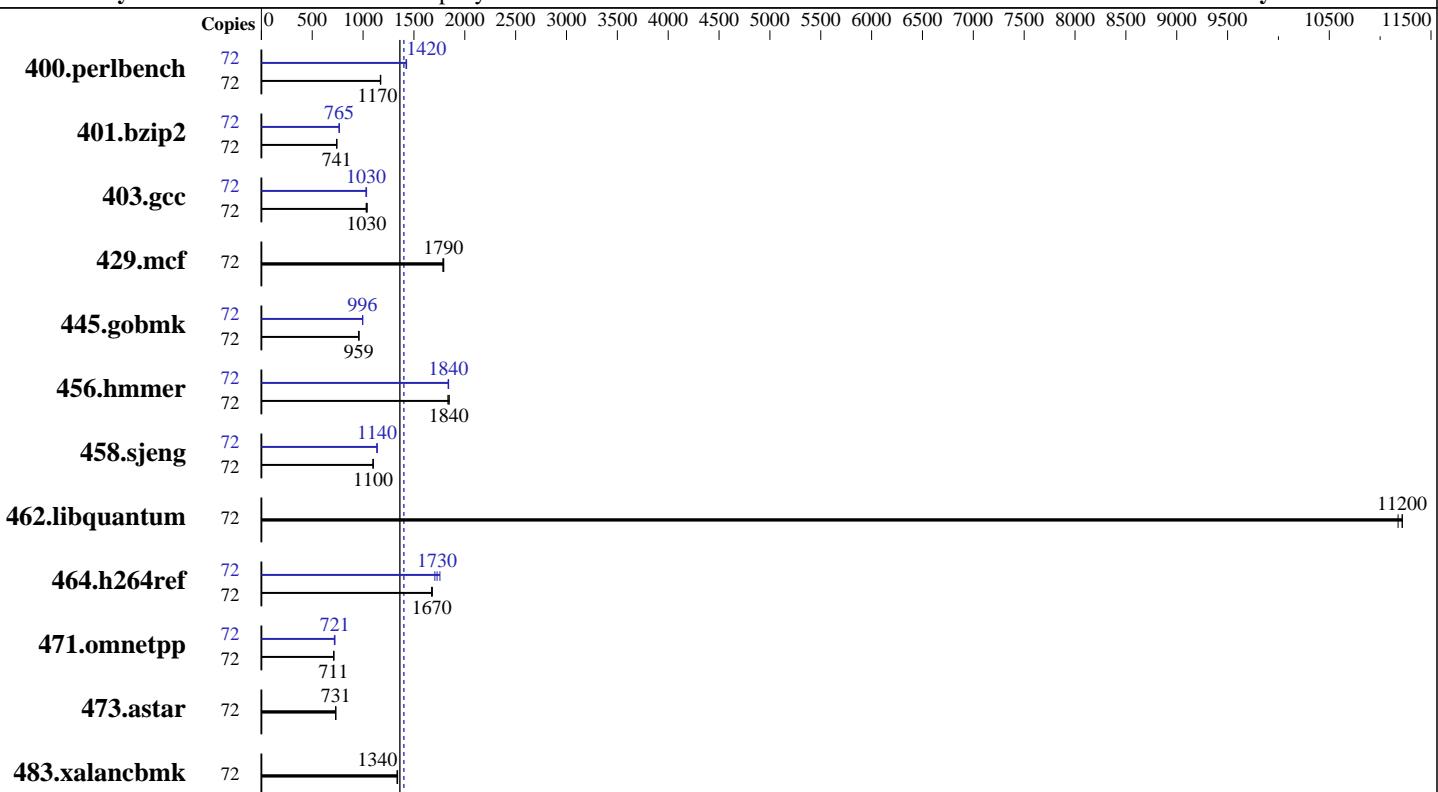

**SPECint\_rate\_base2006 = 1360**

**SPECint\_rate2006 = 1400**

### Hardware

CPU Name: Intel Xeon E5-2699 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: Kernel 3.10.0-123.el7.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

CPU2006 license: 3

Test date: Aug-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Jun-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	601	1170	600	1170	<b>600</b>	<b>1170</b>	72	<b>494</b>	<b>1420</b>	494	1420	493	1430
401.bzip2	72	939	740	937	742	<b>937</b>	<b>741</b>	72	909	765	907	766	<b>908</b>	<b>765</b>
403.gcc	72	557	1040	562	1030	<b>561</b>	<b>1030</b>	72	560	1030	<b>562</b>	<b>1030</b>	564	1030
429.mcf	72	<b>367</b>	<b>1790</b>	368	1780	366	1790	72	<b>367</b>	<b>1790</b>	368	1780	366	1790
445.gobmk	72	787	959	789	957	<b>788</b>	<b>959</b>	72	<b>759</b>	<b>996</b>	758	996	759	995
456.hammer	72	<b>364</b>	<b>1840</b>	366	1830	364	1850	72	<b>365</b>	<b>1840</b>	366	1840	365	1840
458.sjeng	72	<b>793</b>	<b>1100</b>	794	1100	792	1100	72	767	1140	766	1140	<b>766</b>	<b>1140</b>
462.libquantum	72	133	11200	133	11200	<b>133</b>	<b>11200</b>	72	133	11200	133	11200	<b>133</b>	<b>11200</b>
464.h264ref	72	<b>952</b>	<b>1670</b>	952	1670	948	1680	72	<b>922</b>	<b>1730</b>	908	1760	934	1710
471.omnetpp	72	<b>633</b>	<b>711</b>	633	710	630	714	72	<b>624</b>	<b>721</b>	623	723	627	718
473.astar	72	691	732	692	730	<b>692</b>	<b>731</b>	72	691	732	692	730	<b>692</b>	<b>731</b>
483.xalancbmk	72	371	1340	<b>372</b>	<b>1340</b>	372	1330	72	371	1340	<b>372</b>	<b>1340</b>	372	1330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator set to HP Static High Performance Mode

Minimum Processor Idle Power Package C-State set to No Package State

Energy/Performance Bias set to Maximum Performance

QPI Snoop Configuration set to Cluster on Die

Thermal Configuration set to Maimum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6818

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

## Platform Notes (Continued)

```
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on ML350pGen9 Fri Aug 1 17:56:18 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
        2 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 9
    siblings : 18
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

```
From /proc/meminfo
MemTotal:      263839808 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux ML350pGen9 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 1 17:54
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   318G  139G  180G  44% /home
```

Additional information from dmidecode:

BIOS HP P92 07/11/2014

Memory:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Platform Notes (Continued)

16x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank  
8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

16x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

    icc -m32

C++ benchmarks:

    icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3

C++ benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant ML350 Gen9  
(2.30 GHz, Intel Xeon E5-2699 v3)

**SPECint\_rate2006 = 1400**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:19:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.