



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp<sup>®</sup>2006 = **98.2**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = **93.6**

CPU2006 license: 9017


Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

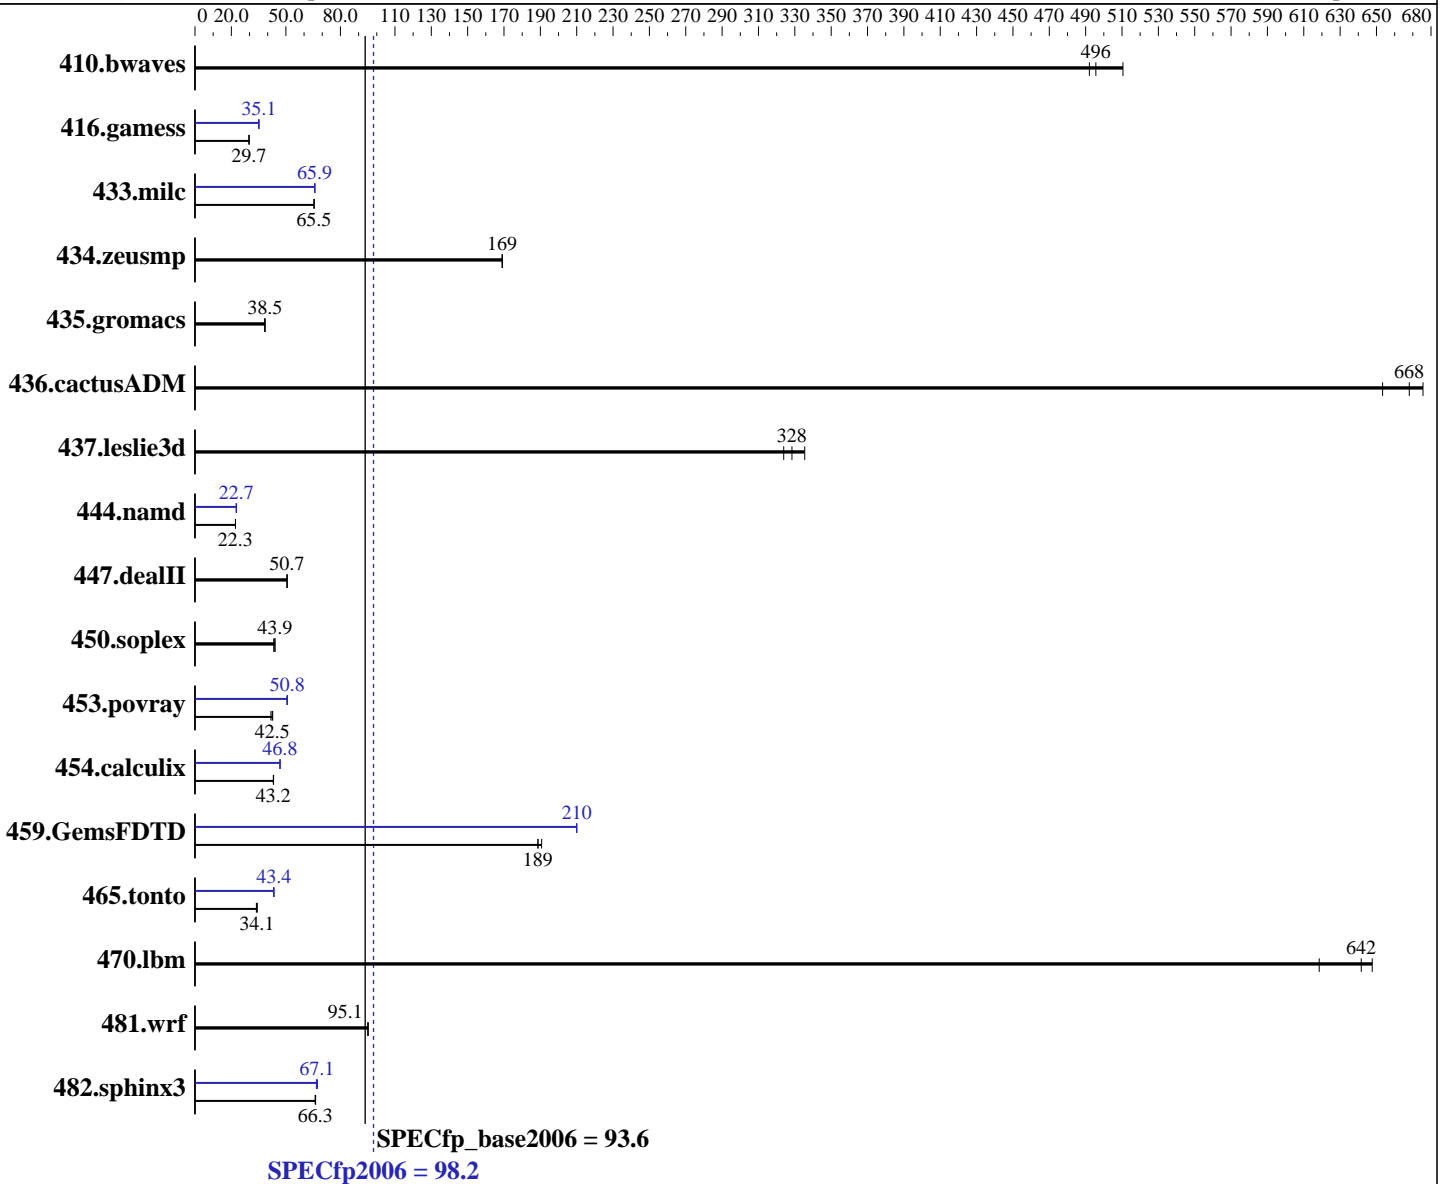

### Hardware

CPU Name: Intel Xeon E5-2695 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = **98.2**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = **93.6**

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>27.4</u>	<u>496</u>	27.6	492	26.6	511	<u>27.4</u>	<u>496</u>	27.6	492	26.6	511
416.gamess	657	29.8	659	29.7	<u>659</u>	<u>29.7</u>	<u>557</u>	<u>35.1</u>	557	35.2	557	35.1
433.milc	<u>140</u>	<u>65.5</u>	140	65.5	140	65.5	139	66.0	<u>139</u>	<u>65.9</u>	139	65.9
434.zeusmp	<u>53.8</u>	<u>169</u>	53.8	169	53.8	169	<u>53.8</u>	<u>169</u>	53.8	169	53.8	169
435.gromacs	186	38.4	<u>186</u>	<u>38.5</u>	186	38.5	186	38.4	<u>186</u>	<u>38.5</u>	186	38.5
436.cactusADM	17.7	676	<u>17.9</u>	<u>668</u>	18.3	653	17.7	676	<u>17.9</u>	<u>668</u>	18.3	653
437.leslie3d	28.0	335	29.0	324	<u>28.6</u>	<u>328</u>	28.0	335	29.0	324	<u>28.6</u>	<u>328</u>
444.namd	360	22.3	<u>360</u>	<u>22.3</u>	360	22.3	353	22.7	<u>353</u>	<u>22.7</u>	353	22.7
447.dealII	<u>226</u>	<u>50.7</u>	226	50.7	226	50.6	<u>226</u>	<u>50.7</u>	226	50.7	226	50.6
450.soplex	193	43.3	189	44.0	<u>190</u>	<u>43.9</u>	193	43.3	189	44.0	<u>190</u>	<u>43.9</u>
453.povray	<u>125</u>	<u>42.5</u>	124	42.8	127	41.8	<u>105</u>	<u>50.8</u>	105	50.8	105	50.5
454.calculix	191	43.1	191	43.2	<u>191</u>	<u>43.2</u>	<u>176</u>	<u>46.8</u>	176	46.8	177	46.7
459.GemsFDTD	<u>56.2</u>	<u>189</u>	56.2	189	55.6	191	<u>50.5</u>	<u>210</u>	50.5	210	50.5	210
465.tonto	291	33.8	<u>288</u>	<u>34.1</u>	288	34.2	228	43.2	<u>226</u>	<u>43.4</u>	226	43.5
470.lbm	<u>21.4</u>	<u>642</u>	22.2	619	21.2	648	<u>21.4</u>	<u>642</u>	22.2	619	21.2	648
481.wrf	117	95.3	117	95.1	<u>117</u>	<u>95.1</u>	117	95.3	117	95.1	<u>117</u>	<u>95.1</u>
482.sphinx3	295	66.1	294	66.4	<u>294</u>	<u>66.3</u>	292	66.8	289	67.4	<u>290</u>	<u>67.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on dx360M4 Sun Sep 28 16:20:14 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = 98.2

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2695 v2 @ 2.40GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 12
  siblings     : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size     : 30720 KB

```

```

From /proc/meminfo
MemTotal:      264642460 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 27 22:40

```

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
ext4            380G    174G  187G  49% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TDE139OUS-1.50]- 02/21/2014

Memory: 16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1867 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.2

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.2

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.2

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

SPECfp\_base2006 = 93.6

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp2006 = 98.2**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp\_base2006 = 93.6**

**CPU2006 license:** 9017

**Test date:** Sep-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 5 10:23:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 November 2014.