



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

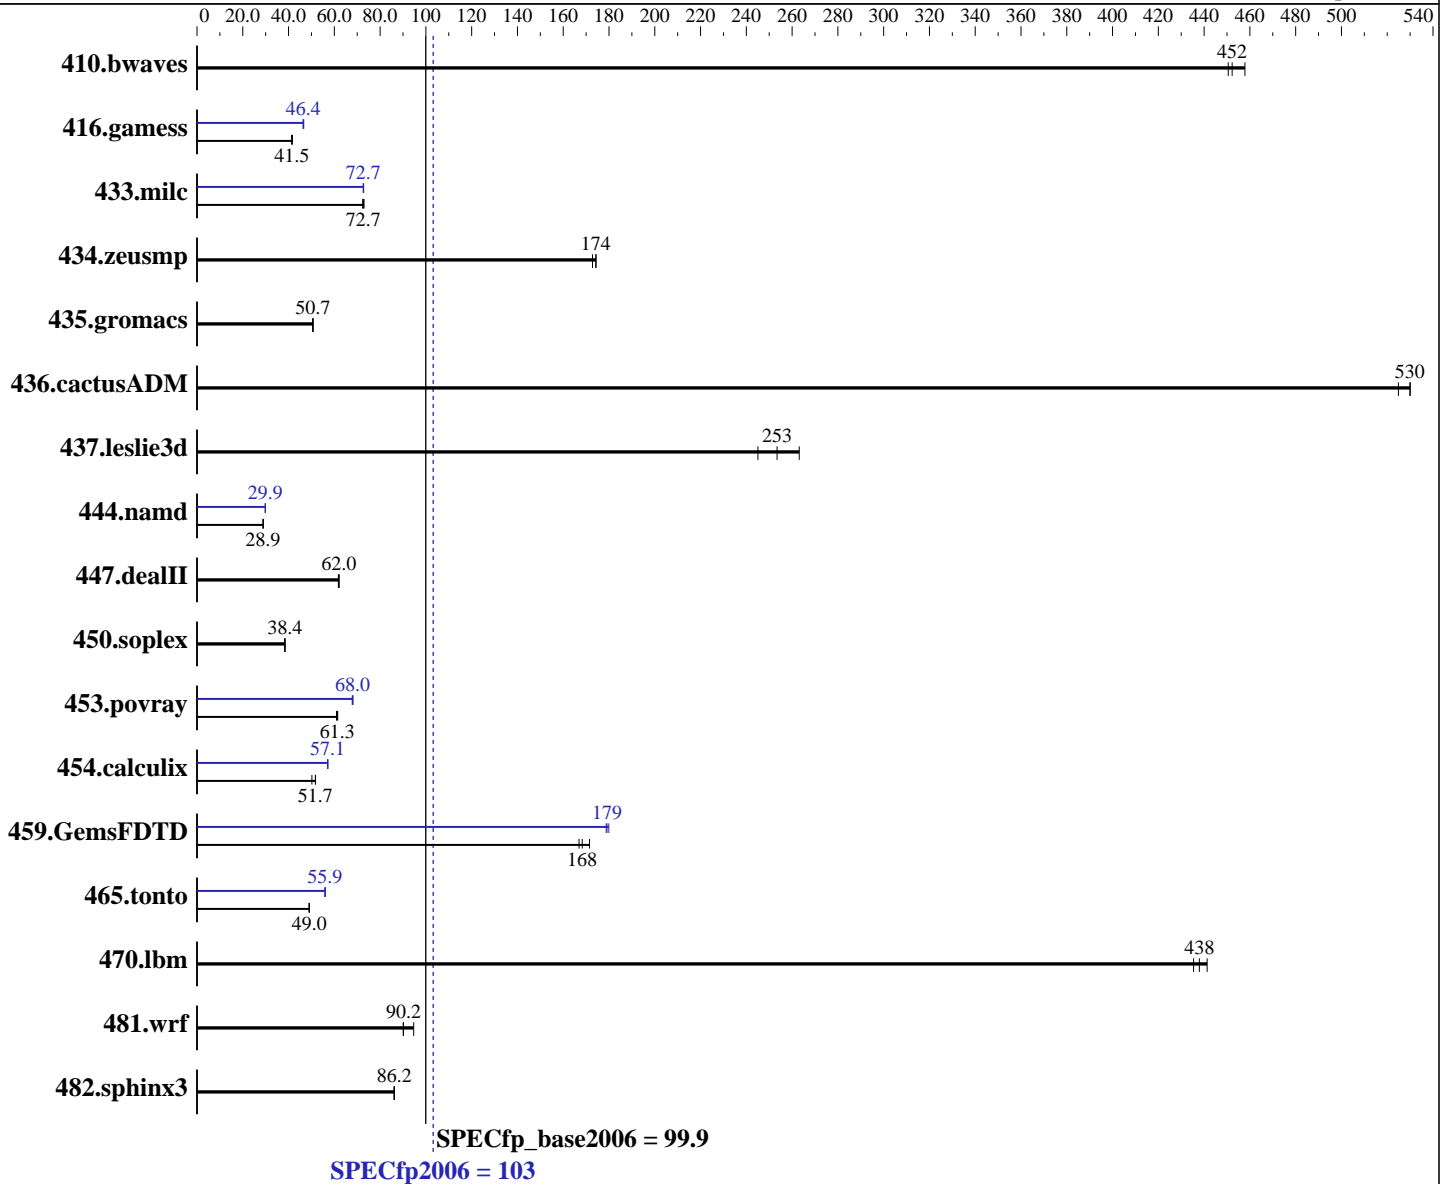

Hardware

CPU Name: Intel Xeon E5-2637 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **103**

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = **99.9**

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	29.7	458	30.0	452	30.2	451	29.7	458	30.0	452	30.2	451
416.gamess	474	41.3	470	41.7	472	41.5	422	46.4	422	46.4	420	46.6
433.milc	126	73.0	127	72.4	126	72.7	126	72.7	126	72.6	126	72.8
434.zeusmp	52.2	174	52.2	174	52.7	173	52.2	174	52.2	174	52.7	173
435.gromacs	141	50.7	141	50.5	141	50.7	141	50.7	141	50.5	141	50.7
436.cactusADM	22.6	530	22.8	525	22.5	530	22.6	530	22.8	525	22.5	530
437.leslie3d	38.4	245	35.7	263	37.1	253	38.4	245	35.7	263	37.1	253
444.namd	278	28.9	277	28.9	278	28.9	269	29.8	269	29.9	269	29.9
447.dealII	185	61.8	184	62.0	184	62.1	185	61.8	184	62.0	184	62.1
450.soplex	217	38.4	218	38.3	217	38.5	217	38.4	218	38.3	217	38.5
453.povray	86.5	61.5	87.3	60.9	86.8	61.3	78.5	67.8	78.0	68.2	78.3	68.0
454.calculix	164	50.2	159	51.8	160	51.7	144	57.2	144	57.1	144	57.1
459.GemsFDTD	61.9	171	63.6	167	63.0	168	59.0	180	59.4	179	59.2	179
465.tonto	201	49.0	201	49.0	201	49.1	176	55.9	176	55.9	176	56.0
470.lbm	31.4	438	31.1	441	31.6	435	31.4	438	31.1	441	31.6	435
481.wrf	118	94.7	124	90.1	124	90.2	118	94.7	124	90.1	124	90.2
482.sphinx3	226	86.3	226	86.2	226	86.1	226	86.3	226	86.2	226	86.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Snoop Mode to HS
 Set Hyper-Threading to Disabled
 Baseboard Management Controller used to adjust the fan speed to 100%
 Sysinfo program /spec14/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Thu Nov 13 13:25:13 2014

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz

2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 4 5

physical 1: cores 0 1 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 263722424 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.0"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57

EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 13 07:36

SPEC is set to: /spec14

Filesystem Type Size Used Avail Use% Mounted on

/dev/sdal xfs 98G 17G 81G 18% /

Additional information from dmidecode:

BIOS Insyde Corp. 1.16 09/02/2014

Memory:

8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank

8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 103

Huawer RH2285 V3 (Intel Xeon E5-2637 v3)

SPECfp_base2006 = 99.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:30:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.