



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint®2006 = 59.1**

Express5800/R120f-2M (Intel Xeon E5-2670 v3)

**SPECint\_base2006 = 56.9**

**CPU2006 license:** 9006


**Test date:** Oct-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:** Feb-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

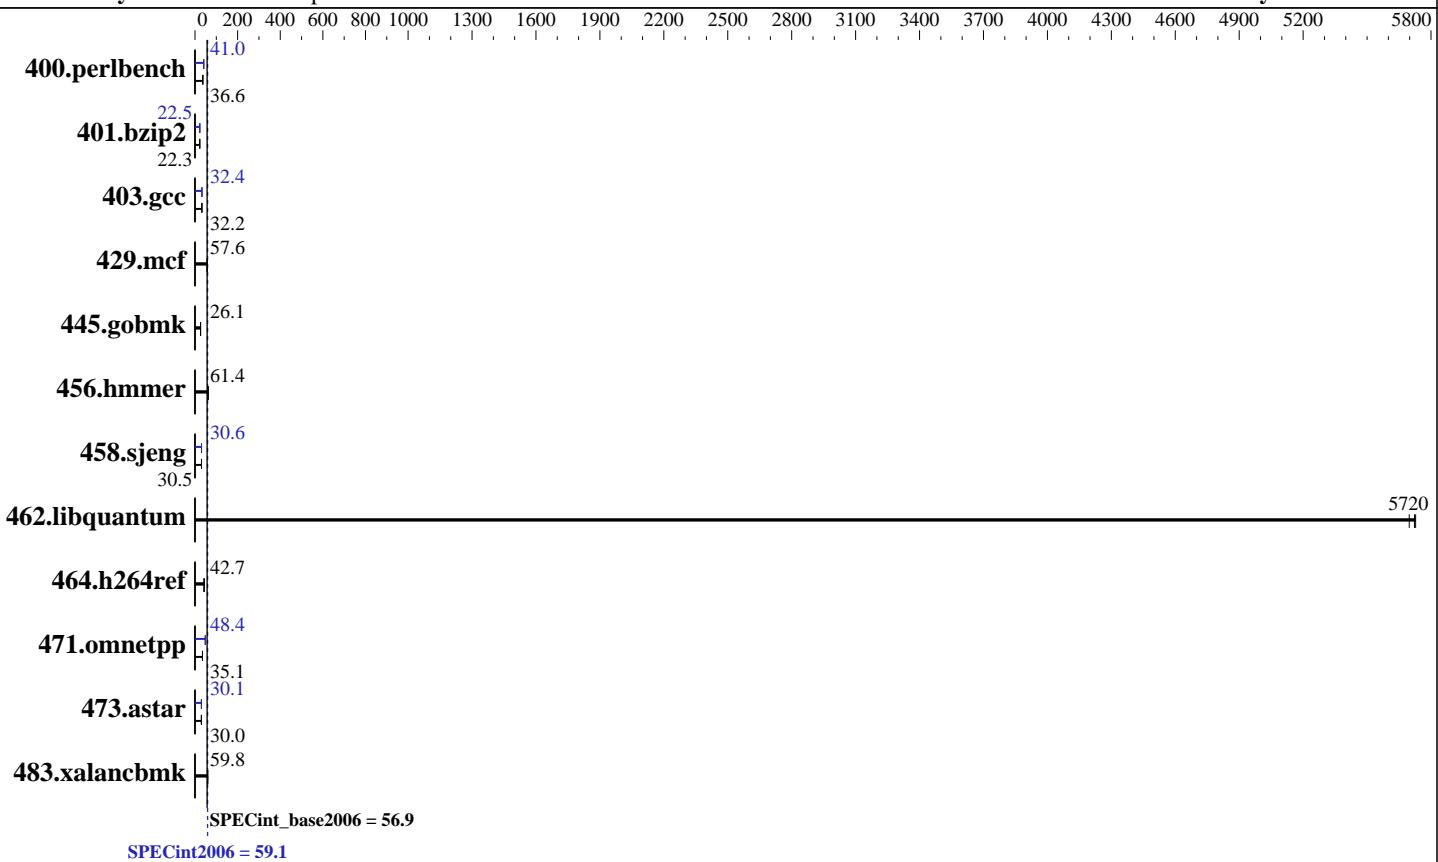

## Hardware

CPU Name: Intel Xeon E5-2670 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Compiler: Kernel 2.6.32-431.17.1.el6.x86\_64  
 Auto Parallel: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120f-2M (Intel Xeon E5-2670 v3)

**SPECint2006 = 59.1**

**SPECint\_base2006 = 56.9**

**CPU2006 license:** 9006

**Test date:** Oct-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:** Feb-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	267	36.7	267	36.6	<b>267</b>	<b>36.6</b>	239	40.9	238	41.0	<b>238</b>	<b>41.0</b>
401.bzip2	432	22.3	<b>433</b>	<b>22.3</b>	433	22.3	<b>428</b>	<b>22.6</b>	<b>429</b>	<b>22.5</b>	<b>428</b>	<b>22.5</b>
403.gcc	250	32.2	<b>250</b>	<b>32.2</b>	250	32.2	<b>249</b>	<b>32.4</b>	246	32.7	249	32.4
429.mcf	<b>158</b>	<b>57.6</b>	160	57.0	158	57.6	<b>158</b>	<b>57.6</b>	160	57.0	158	57.6
445.gobmk	402	26.1	402	26.1	<b>402</b>	<b>26.1</b>	402	26.1	402	26.1	<b>402</b>	<b>26.1</b>
456.hmmer	152	61.3	<b>152</b>	<b>61.4</b>	152	61.4	<b>152</b>	<b>61.3</b>	<b>152</b>	<b>61.4</b>	152	61.4
458.sjeng	397	30.5	397	30.4	<b>397</b>	<b>30.5</b>	395	30.7	<b>395</b>	<b>30.6</b>	396	30.6
462.libquantum	3.62	5730	<b>3.62</b>	<b>5720</b>	3.64	5700	3.62	5730	<b>3.62</b>	<b>5720</b>	3.64	5700
464.h264ref	<b>518</b>	<b>42.7</b>	517	42.8	519	42.6	<b>518</b>	<b>42.7</b>	517	42.8	519	42.6
471.omnetpp	179	34.9	177	35.3	<b>178</b>	<b>35.1</b>	129	48.6	130	48.1	<b>129</b>	<b>48.4</b>
473.astar	232	30.2	235	29.9	<b>234</b>	<b>30.0</b>	233	30.1	234	30.0	<b>233</b>	<b>30.1</b>
483.xalancbmk	120	57.7	<b>115</b>	<b>59.8</b>	115	60.0	120	57.7	<b>115</b>	<b>59.8</b>	115	60.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom  
Energy Performance: Performance  
Patrol Scrub: Disabled  
Demand Scrub: Disabled  
Hyper-Threading: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "24"

The Express5800/R120f-1M (Intel Xeon E5-2670 v3) and the Express5800/R120f-2M (Intel Xeon E5-2670 v3) models are electronically equivalent. The results have been measured on the Express5800/R120f-2M (Intel Xeon E5-2670 v3) model.

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-2M (Intel Xeon E5-2670 v3)

**SPECint2006 = 59.1**

**SPECint\_base2006 = 56.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Oct-2014

**Hardware Availability:** Feb-2015

**Software Availability:** Jul-2014

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120f-2M (Intel Xeon E5-2670 v3)

**SPECint2006 = 59.1**

**SPECint\_base2006 = 56.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Oct-2014

**Hardware Availability:** Feb-2015

**Software Availability:** Jul-2014

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

445.gobmk: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

464.h264ref: `-DSPEC_CPU_LP64`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

456.hammer: `basepeak = yes`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-2M (Intel Xeon E5-2670 v3)

**SPECint2006 = 59.1**

**SPECint\_base2006 = 56.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Oct-2014

**Hardware Availability:** Feb-2015

**Software Availability:** Jul-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap
```

```
473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Feb 5 18:36:09 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.