



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECint<sup>®</sup>\_rate2006 = 1260

SPECint\_rate\_base2006 = 1220

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

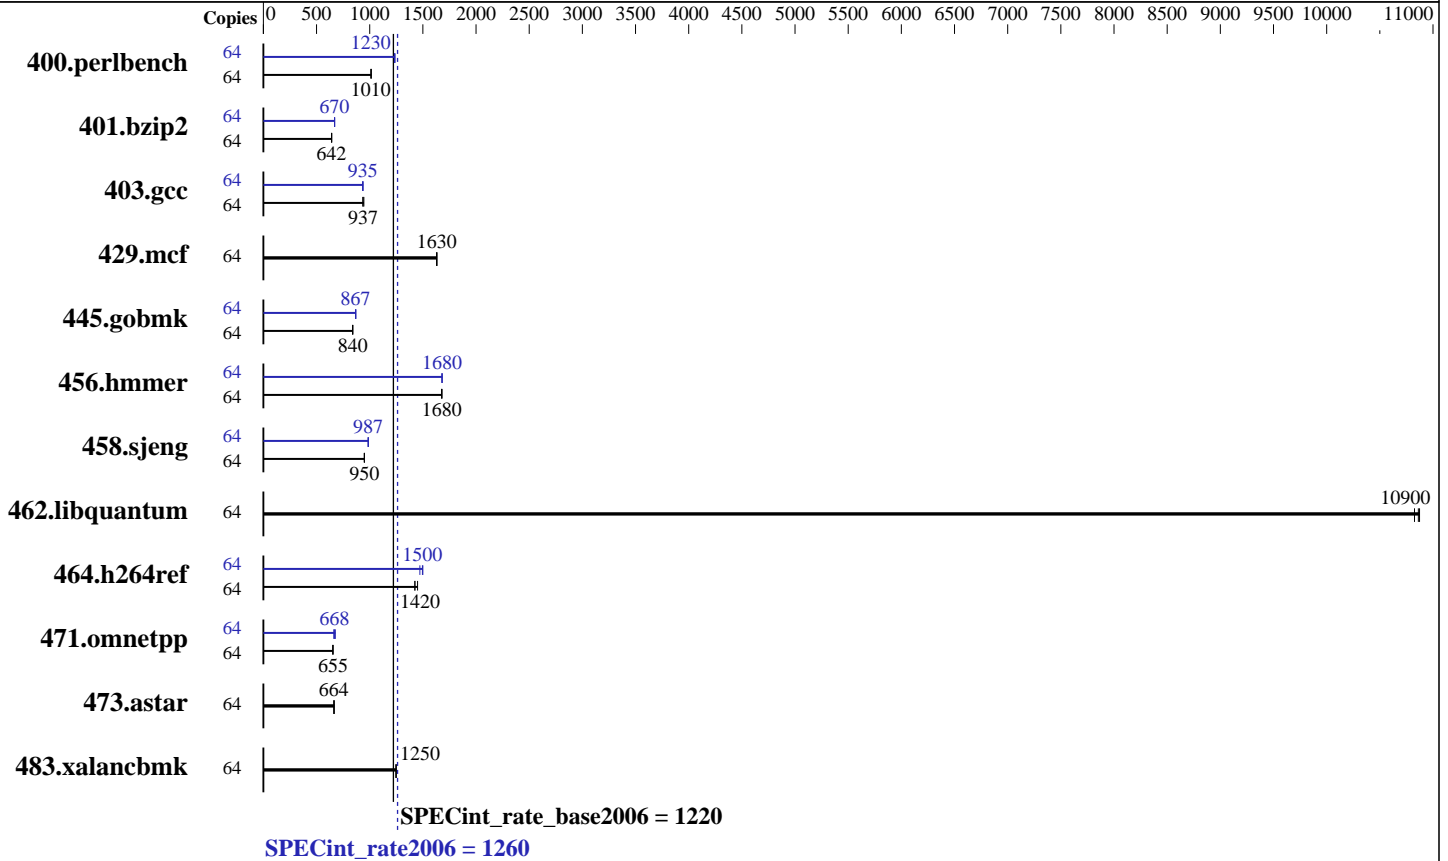

### Hardware

CPU Name: Intel Xeon E5-2698 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 40 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECint\_rate2006 = 1260

SPECint\_rate\_base2006 = 1220

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	618	1010	616	1010	<b>618</b>	<b>1010</b>	64	<b>507</b>	<b>1230</b>	507	1230	505	1240
401.bzip2	64	<b>962</b>	<b>642</b>	963	641	961	643	64	923	669	<b>922</b>	<b>670</b>	921	671
403.gcc	64	545	945	<b>550</b>	<b>937</b>	551	935	64	549	938	552	933	<b>551</b>	<b>935</b>
429.mcf	64	<b>358</b>	<b>1630</b>	358	1630	358	1630	64	<b>358</b>	<b>1630</b>	358	1630	358	1630
445.gobmk	64	799	841	<b>799</b>	<b>840</b>	800	839	64	774	867	772	870	<b>774</b>	<b>867</b>
456.hammer	64	356	1680	<b>356</b>	<b>1680</b>	356	1680	64	<b>355</b>	<b>1680</b>	355	1680	356	1680
458.sjeng	64	815	951	816	949	<b>815</b>	<b>950</b>	64	786	985	784	987	<b>785</b>	<b>987</b>
462.libquantum	64	122	10800	<b>122</b>	<b>10900</b>	122	10900	64	122	10800	<b>122</b>	<b>10900</b>	122	10900
464.h264ref	64	977	1450	994	1420	<b>994</b>	<b>1420</b>	64	<b>947</b>	<b>1500</b>	944	1500	962	1470
471.omnetpp	64	611	655	613	652	<b>611</b>	<b>655</b>	64	<b>599</b>	<b>668</b>	591	677	604	662
473.astar	64	674	666	678	662	<b>677</b>	<b>664</b>	64	674	666	678	662	<b>677</b>	<b>664</b>
483.xalancbmk	64	354	1250	<b>354</b>	<b>1250</b>	354	1250	64	354	1250	<b>354</b>	<b>1250</b>	354	1250

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```

BIOS configuration:
Cluster On Die set to Enabled
Early Snoop set to Disabled
Performance Profile set to Custom
C1E Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to High Fan Speed
Memory Power Savings set to Disabled
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on RD550 Sat Oct 25 00:05:25 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 1260

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECint\_rate\_base2006 = 1220

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2014

Tested by: Lenovo Group Limited

Software Availability: Jan-2014

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264409300 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RD550 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Oct 25 00:04

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       ext4      730G      58G   635G   9% /

Additional information from dmidecode:
BIOS LENOVO PB1TS110 10/06/2014
Memory:
 16x 16 GB
 1x Hynix Semiconductor HMA42GR7MFR4N-TF 16 GB 2133 MHz 2 rank
 15x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank
 8x NO DIMM NO DIMM

(End of data from sysinfo program)
RD550 support 4 channels and 12 DIMMs per processor, total 8 channels and
24 DIMMs. 16 DIMM slots installed with 16 GB DIMM for this run.

```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 1260**

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECint\_rate\_base2006 = 1220**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jan-2014

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECint\_rate2006 = 1260

SPECint\_rate\_base2006 = 1220

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 1260**

Lenovo ThinkServer RD550 (Intel Xeon E5-2698 v3, 2.30 GHz)

**SPECint\_rate\_base2006 = 1220**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jan-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD550-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD550-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 27 13:31:27 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 January 2015.