



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECint®\_rate2006 = 693

SPECint\_rate\_base2006 = 665

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

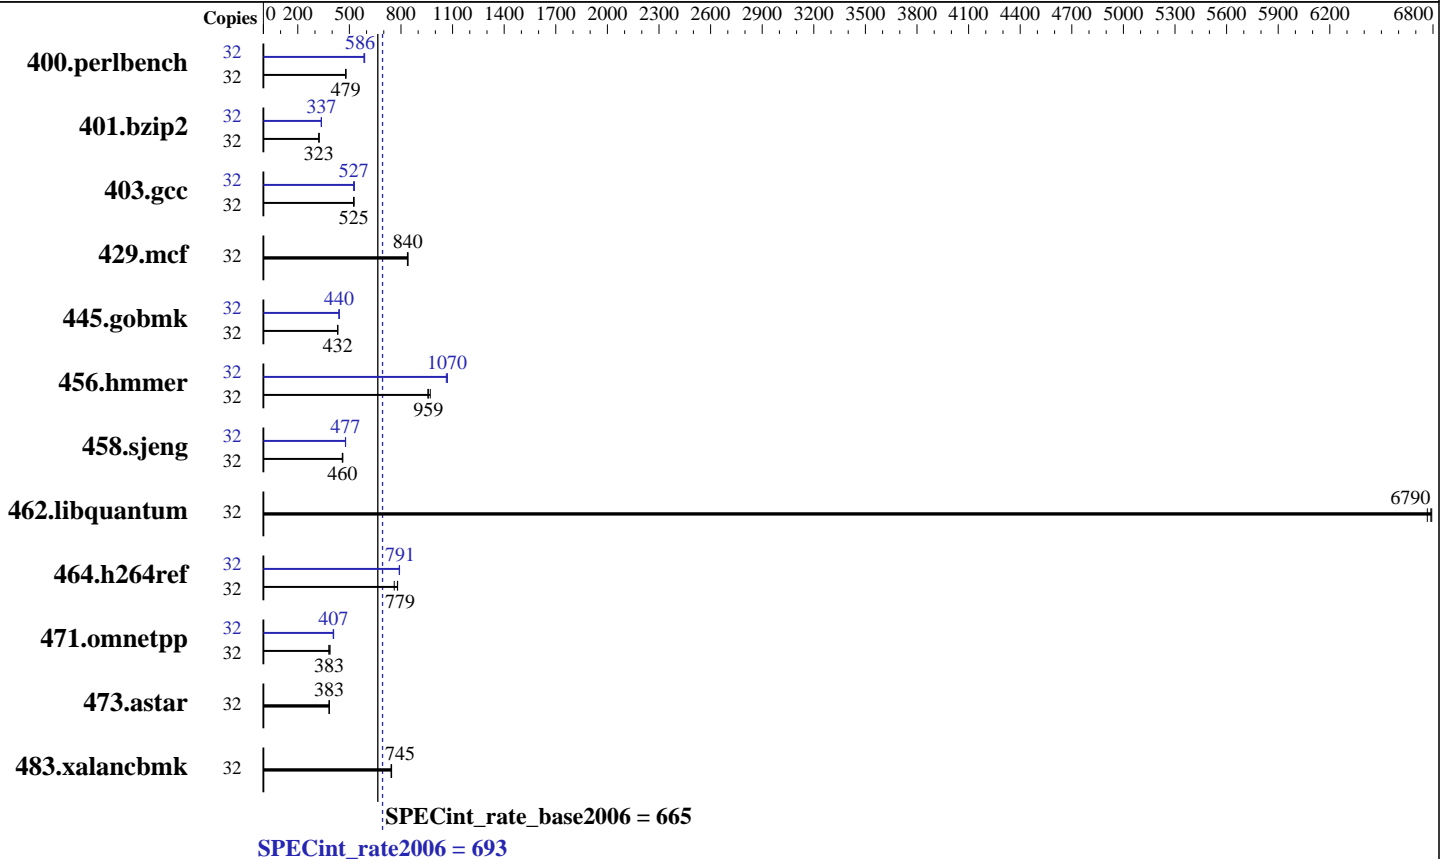

### Hardware

CPU Name: Intel Xeon E5-2630 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 240 GB SATA II SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.20.1.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECint\_rate2006 = 693

SPECint\_rate\_base2006 = 665

CPU2006 license: 9008  
Test sponsor: ACTION S.A.  
Tested by: ACTION S.A.

Test date: Feb-2015  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	652	480	653	479	<u>652</u>	<u>479</u>	32	<u>534</u>	<u>586</u>	531	589	534	586
401.bzip2	32	958	322	953	324	<u>955</u>	<u>323</u>	32	915	338	918	336	<u>915</u>	<u>337</u>
403.gcc	32	488	527	492	524	<u>490</u>	<u>525</u>	32	487	529	<u>489</u>	<u>527</u>	491	525
429.mcf	32	347	841	349	837	<u>348</u>	<u>840</u>	32	347	841	349	837	<u>348</u>	<u>840</u>
445.gobmk	32	777	432	<u>777</u>	<u>432</u>	777	432	32	763	440	<u>763</u>	<u>440</u>	762	440
456.hammer	32	308	970	<u>311</u>	<u>959</u>	312	956	32	281	1060	<u>279</u>	<u>1070</u>	279	1070
458.sjeng	32	838	462	<u>843</u>	<u>460</u>	843	459	32	810	478	812	477	<u>811</u>	<u>477</u>
462.libquantum	32	97.6	6790	98.0	6770	<u>97.7</u>	<u>6790</u>	32	97.6	6790	98.0	6770	<u>97.7</u>	<u>6790</u>
464.h264ref	32	907	781	931	761	<u>909</u>	<u>779</u>	32	<u>896</u>	<u>791</u>	894	792	896	790
471.omnetpp	32	516	388	<u>523</u>	<u>383</u>	525	381	32	489	409	<u>491</u>	<u>407</u>	492	406
473.astar	32	587	383	<u>587</u>	<u>383</u>	587	383	32	587	383	<u>587</u>	<u>383</u>	587	383
483.xalancbmk	32	<u>296</u>	<u>745</u>	296	745	297	742	32	<u>296</u>	<u>745</u>	296	745	297	742

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings  
Power Technology = Energy Efficient  
Enforce POR = Disabled

BMC Setting  
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Thu Feb 19 09:51:50 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECint\_rate2006 = 693

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECint\_rate\_base2006 = 665

CPU2006 license: 9008

Test date: Feb-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

### Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      263871312 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.0 (Maipo)

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 18 15:47

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext4  212G   25G  176G  13% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0a 11/05/2014
Memory:
16x 16 GB
2x Samsung(data:14/40) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank
14x Samsung(data:14/48) M393A2G40DB0-CPB 16 GB 1866 MHz 2 rank

```

(End of data from sysinfo program)  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint\_rate2006 = 693**

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

**SPECint\_rate\_base2006 = 665**

**CPU2006 license:** 9008

**Test date:** Feb-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

dmidecode does not properly detect memory modules  
16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
C++ benchmarks:  
icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

**SPECint\_rate2006 = 693**

**SPECint\_rate\_base2006 = 665**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

**SPECint\_rate2006 = 693**

**SPECint\_rate\_base2006 = 665**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2630 v3, 2.40 GHz)

**SPECint\_rate2006 = 693**

**SPECint\_rate\_base2006 = 665**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Mar 10 16:03:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 March 2015.