



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECint\_rate2006 = 859**

**SPECint\_rate\_base2006 = 826**

CPU2006 license: 9008


Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

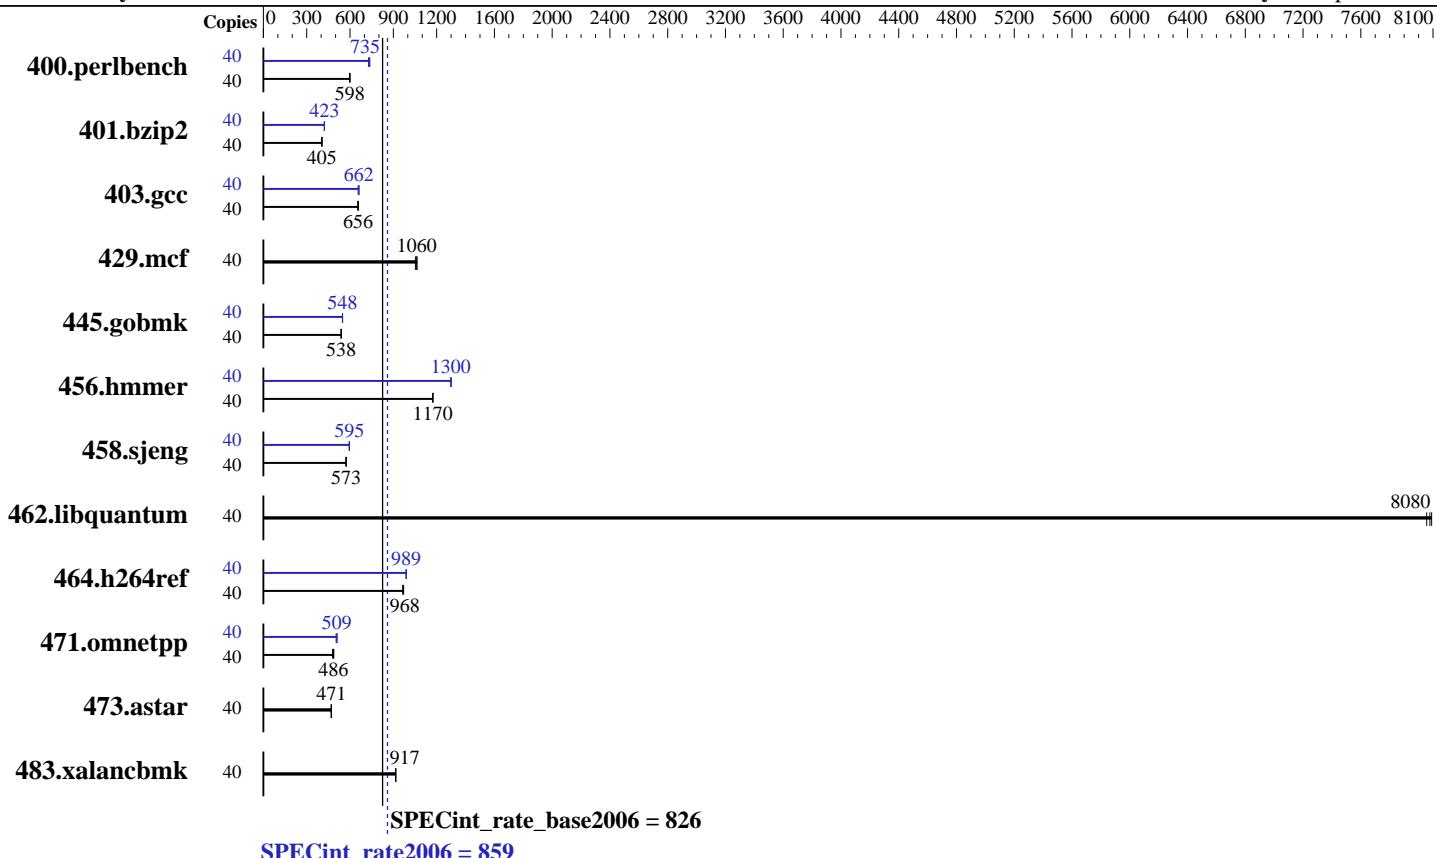

### Hardware

CPU Name: Intel Xeon E5-2650 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: 3.10.0-123.20.1.el7.x86\_64  
Auto Parallel: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>ACTION S.A.</b>	<b>SPECint_rate2006 =</b>	<b>859</b>
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECint_rate_base2006 =</b>	<b>826</b>

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>653</b>	<b>598</b>	652	600	653	598	40	<b>532</b>	<b>735</b>	537	728	530	737
401.bzip2	40	952	405	<b>952</b>	<b>405</b>	951	406	40	915	422	912	423	<b>913</b>	<b>423</b>
403.gcc	40	<b>491</b>	<b>656</b>	489	659	493	653	40	491	656	487	662	<b>487</b>	<b>662</b>
429.mcf	40	343	1060	<b>344</b>	<b>1060</b>	347	1050	40	343	1060	<b>344</b>	<b>1060</b>	347	1050
445.gobmk	40	<b>780</b>	<b>538</b>	780	538	778	540	40	<b>766</b>	<b>548</b>	764	549	767	547
456.hammer	40	<b>318</b>	<b>1170</b>	318	1170	318	1170	40	287	1300	287	1300	<b>287</b>	<b>1300</b>
458.sjeng	40	845	573	845	573	<b>845</b>	<b>573</b>	40	813	596	814	595	<b>813</b>	<b>595</b>
462.libquantum	40	<b>103</b>	<b>8080</b>	102	8090	103	8060	40	<b>103</b>	<b>8080</b>	102	8090	103	8060
464.h264ref	40	911	971	917	965	<b>914</b>	<b>968</b>	40	<b>895</b>	<b>989</b>	896	988	894	990
471.omnetpp	40	513	488	<b>515</b>	<b>486</b>	522	479	40	490	510	496	504	<b>491</b>	<b>509</b>
473.astar	40	598	470	<b>597</b>	<b>471</b>	596	471	40	598	470	<b>597</b>	<b>471</b>	596	471
483.xalancbmk	40	301	916	<b>301</b>	<b>917</b>	301	917	40	301	916	<b>301</b>	<b>917</b>	301	917

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings:

Power & Performance = Performance  
Enforce POR = Disabled  
Memory Operating Speed Selection = Auto  
Cluster-on-Die = Enabled  
Set Fan Profile = Performance  
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Mon Mar 16 09:55:34 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>859</b>
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECint_rate_base2006 =</b>	<b>826</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Mar-2015
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Sep-2014
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Sep-2014

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 5
    siblings : 10
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

```
From /proc/meminfo
MemTotal:      263867256 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.0 (Maipo)
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 16 09:51
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  212G   33G  168G  17%  /
```

```
Additional information from dmidecode:
BIOS Intel Corporation SE5C610.86B.01.01.0008.021120151325 02/11/2015
Memory:
 16x 16 GB
 16x Micron 36ASF2G72PZ-2G1A2 16 GB 2134 MHz 2 rank
 8x NO DIMM NO DIMM
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>859</b>
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECint_rate_base2006 =</b>	<b>826</b>
CPU2006 license: 9008	Test date:	Mar-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2014
Tested by: ACTION S.A.	Software Availability:	Sep-2014

## Platform Notes (Continued)

(End of data from sysinfo program)  
dmidecode does not properly detect memory modules  
16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>859</b>
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECint_rate_base2006 =</b>	<b>826</b>
CPU2006 license: 9008	Test date:	Mar-2015
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2014
Tested by: ACTION S.A.	Software Availability:	Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>859</b>
ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)	<b>SPECint_rate_base2006 =</b>	<b>826</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Mar-2015
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Sep-2014
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Sep-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevA-mar-2015-For-Intel-Platform.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 210 X6 (Intel Xeon E5-2650 v3, 2.30 GHz)

**SPECint\_rate2006 = 859**

**SPECint\_rate\_base2006 = 826**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 8 11:03:14 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 April 2015.