



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55


Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

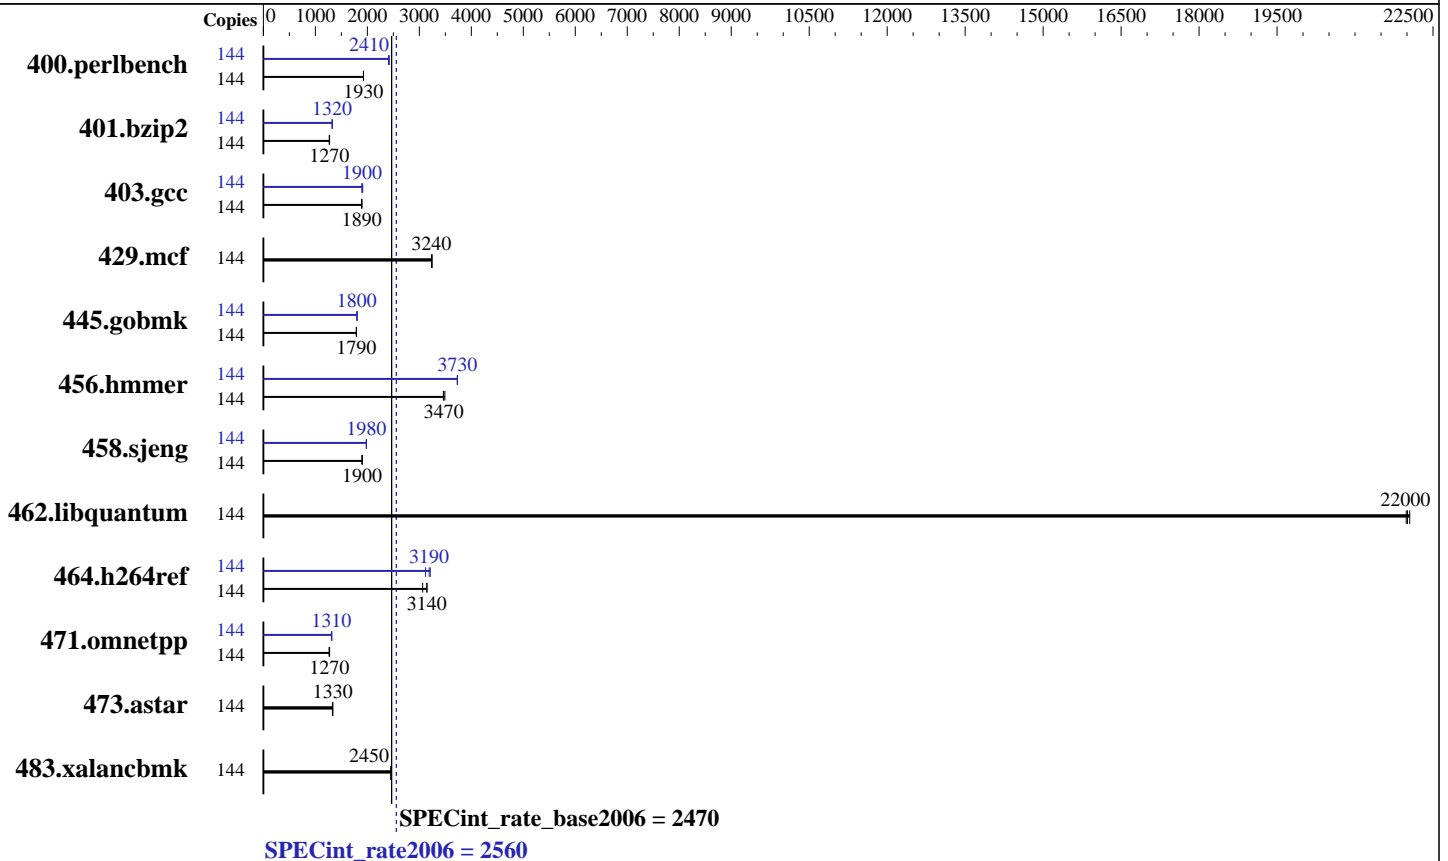

Hardware

CPU Name: Intel Xeon E5-4669 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	730	1930	731	1920	<u>730</u>	<u>1930</u>	144	584	2410	<u>584</u>	<u>2410</u>	581	2420
401.bzip2	144	1091	1270	1096	1270	<u>1093</u>	<u>1270</u>	144	<u>1050</u>	<u>1320</u>	1047	1330	1051	1320
403.gcc	144	<u>612</u>	<u>1890</u>	614	1890	611	1900	144	<u>611</u>	<u>1900</u>	611	1900	606	1910
429.mcf	144	404	3250	406	3230	<u>406</u>	<u>3240</u>	144	404	3250	406	3230	<u>406</u>	<u>3240</u>
445.gobmk	144	844	1790	845	1790	<u>844</u>	<u>1790</u>	144	<u>839</u>	<u>1800</u>	837	1800	840	1800
456.hammer	144	385	3490	<u>387</u>	<u>3470</u>	388	3460	144	360	3730	360	3730	<u>360</u>	<u>3730</u>
458.sjeng	144	<u>917</u>	<u>1900</u>	917	1900	917	1900	144	880	1980	<u>880</u>	<u>1980</u>	879	1980
462.libquantum	144	136	22000	<u>136</u>	<u>22000</u>	135	22100	144	136	22000	<u>136</u>	<u>22000</u>	135	22100
464.h264ref	144	1040	3060	<u>1014</u>	<u>3140</u>	1012	3150	144	<u>999</u>	<u>3190</u>	1021	3120	992	3210
471.omnetpp	144	<u>709</u>	<u>1270</u>	711	1270	706	1270	144	688	1310	683	1320	<u>687</u>	<u>1310</u>
473.astar	144	761	1330	<u>758</u>	<u>1330</u>	757	1340	144	761	1330	<u>758</u>	<u>1330</u>	757	1340
483.xalancbmk	144	<u>405</u>	<u>2450</u>	403	2460	405	2450	144	<u>405</u>	<u>2450</u>	403	2460	405	2450

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Early Snoop

Virtualization Technology disabled

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-k8qh Tue Jan 27 17:02:37 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4669 v3 @ 2.10GHz

4 "physical id"s (chips)

144 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

From /proc/meminfo

```

MemTotal:      529334376 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

uname -a:

```

Linux linux-k8qh 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 27 17:00

SPEC is set to: /root/cpu2006-1.2

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  267G  8.6G  257G   4% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

Memory:

```

4x 002C00B3002C 36ASF2G72PZ-2G1A1 16 GB 2 rank 2133 MHz
1x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
11x 00AD063200AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
5x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
11x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
16x Not Specified Not Specified

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 2560

PowerEdge FC830 (Intel Xeon E5-4669 v3, 2.10 GHz)

SPECint_rate_base2006 = 2470

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2015

Hardware Availability: Jun-2015

Software Availability: Jun-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 2 12:38:08 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 June 2015.